

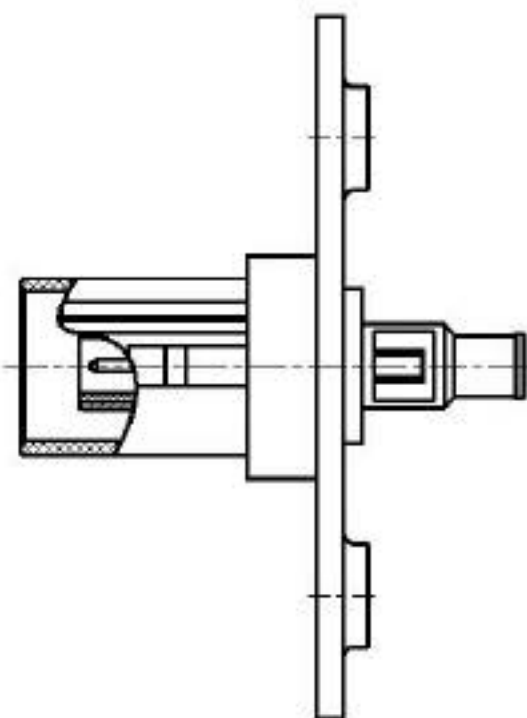


A

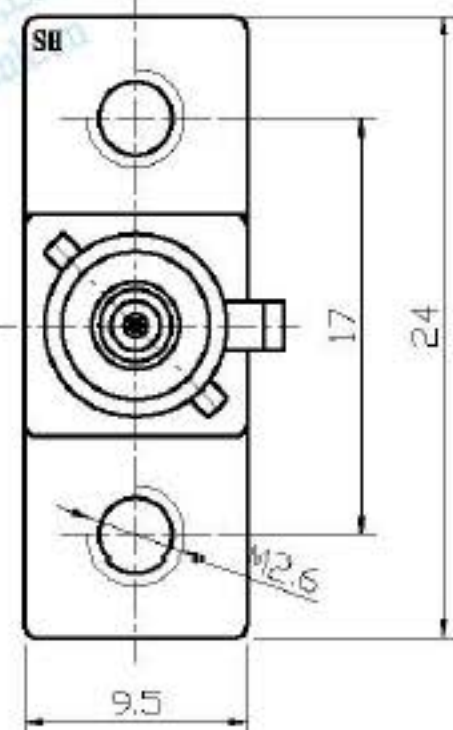

B

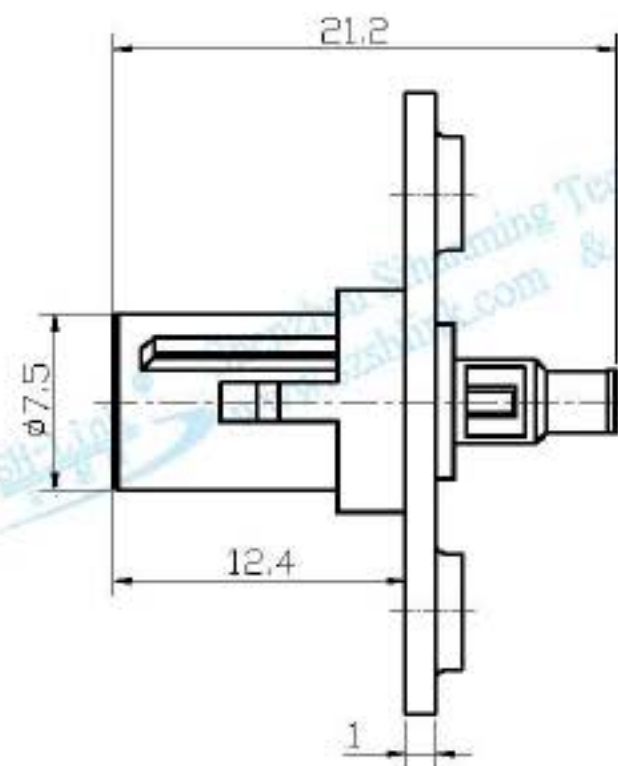

C



D




E



F



G



H



I



K



Z



L




M




N

Port Type

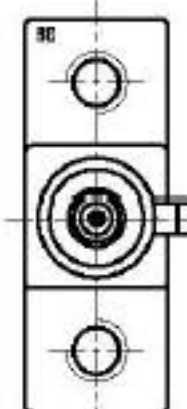

I

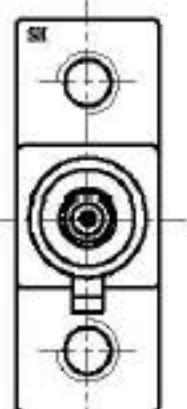




II

Package:

1. Copper: 100pcs/PE bag;
2. Plastic shell 100pcs & above parts/PE bag;
3. Carton: Yellow Corrugated Carton.

包装:

1. 铜管: 100pcs/PE袋;
2. 塑胶五金壳100pcs+以上配件/PE袋;
3. 外箱: 黄色瓦楞纸箱.

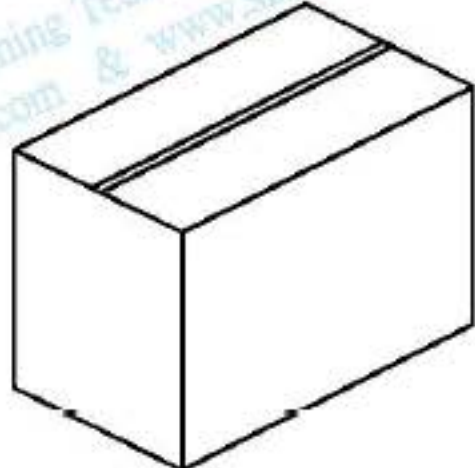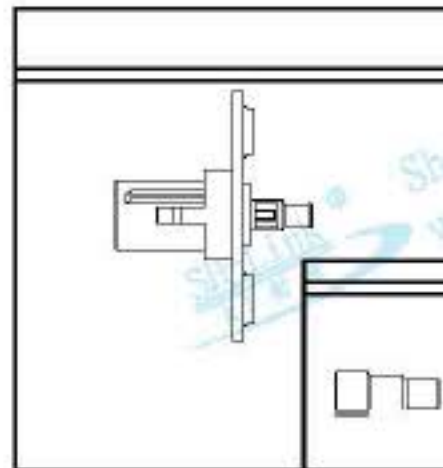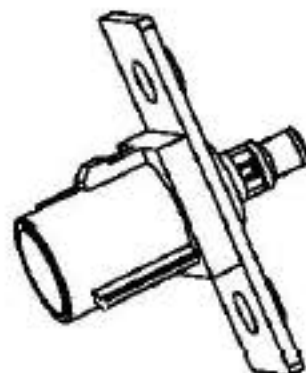

7					Limits	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE	DATE作成日期	SH-Link®	深圳市思翰铭科技有限公司
6	Plastic shell外壳	PA66+30%GF		1	0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY		RF射频	Shenzhen Sihanning Technology Co., Ltd
5	Metal Plate挡板	Steel不锈钢		1	6-18	0.05	0.08	0.10	0.15	0.20	0.25	CHECKED BY		SCALE	2:1
4	Copper tube铜管	Brass黄铜	Nickel plated镀镍	1	18-30	0.08	0.10	0.15	0.20	0.25	0.35	APPROVED BY		WEIGHT	重量(g)
3	Insulator绝缘体	PTFE聚四氟乙烯		1	30-50	0.10	0.15	0.20	0.25	0.30	0.50	ITEM NO品号		3.9	PERSPECTIVE
2	Pin contact中心针	Brass黄铜	Gold plated 镀金	1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	PART DESCRIPTION品名			
1	Body壳体	Brass黄铜	Three element alloy三元合金	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80	SHM. 900. 0006-5			FAKRA SMB-C-J1.0-1
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量	120-180	0.25	0.35	0.50	0.65	0.80	0.95				
					180-250	0.35	0.50	0.65	0.95	0.95	1.15				

JJ