

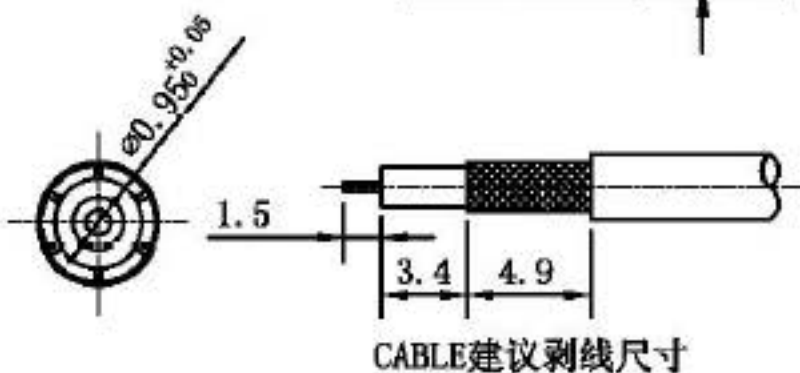
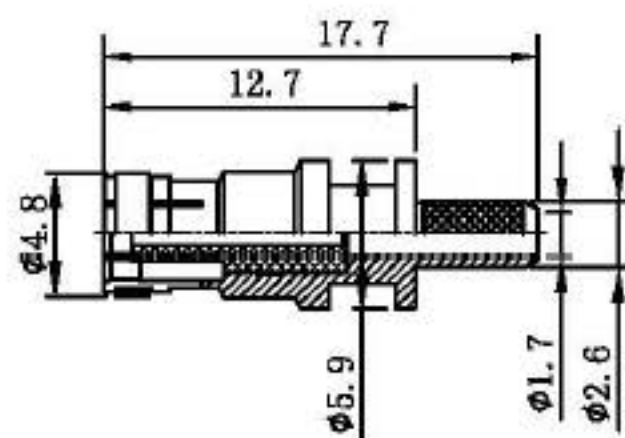
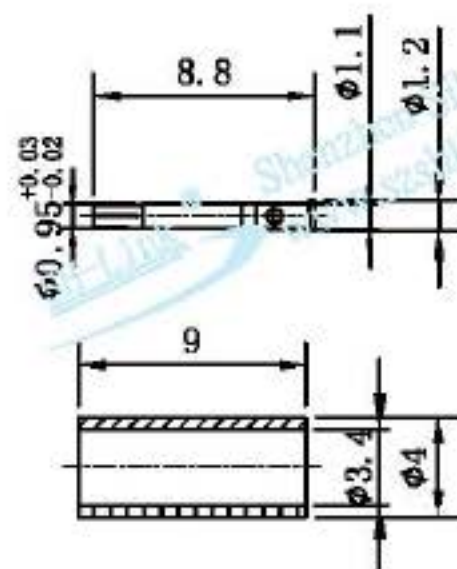
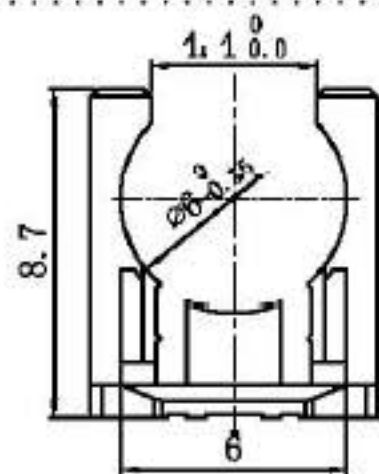


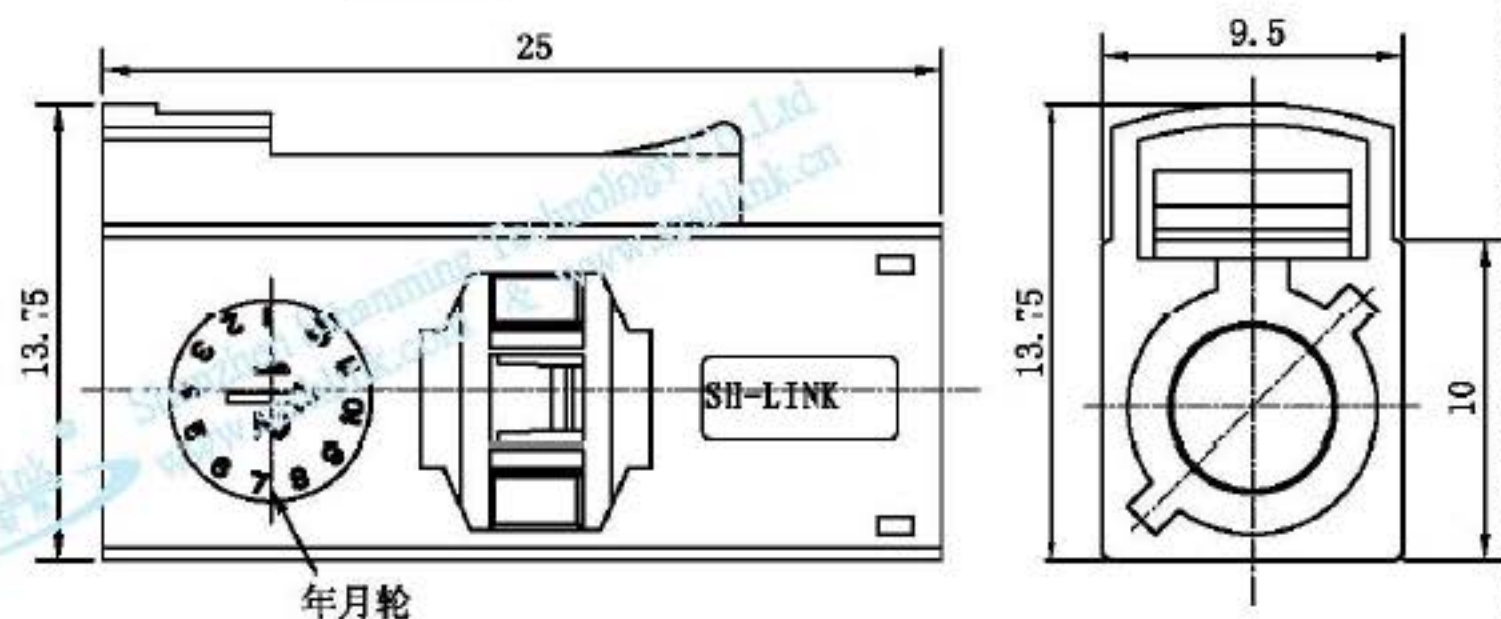

CABLE建议剥线尺寸

端口类型

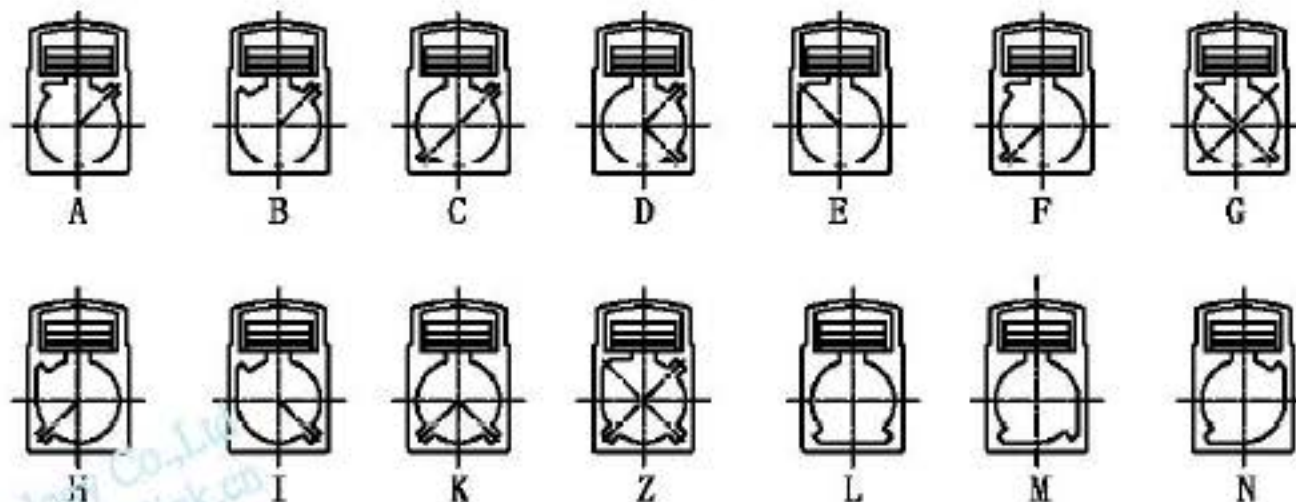


Package:

1. Copper: 100pcs/PE bag;
2. Pin contact: 100pcs/PE bag;
3. Body: 100pcs/PE bag;
4. Snap ring: 100pcs/PE bag;
5. Plastic shell 100pcs & above parts/PE bag;
6. Carton: Yellow Corrugated Carton.

包装:

1. 铜管: 100pcs/PE袋;
2. 中心针: 100pcs/PE袋;
3. 五金壳: 100pcs/PE袋;
4. 卡扣: 100pcs/PE袋;
5. 塑胶壳: 100pcs+以上配件/PE袋;
6. 外箱: 黄色瓦楞纸箱.

包装示意图

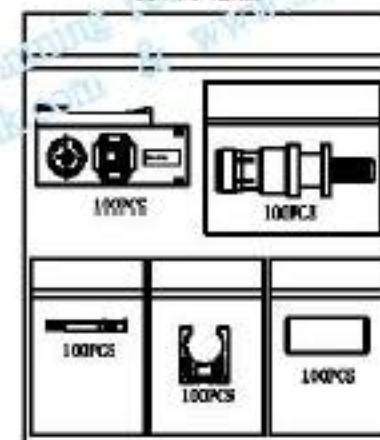

7	Plastic shell外壳	PA66+30%GF		1	Limits unit:mm	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期	SH-Link® 深圳市思翰铭科技有限公司 RF 射频 Shenzhen Sihanning Technology Co., Ltd
6	Snap ring卡环	PA66+30%GF		1	0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY 胡宁伟	SCALE 比例 10:1
5	copper sleeve铜管	brass 黄铜	nickel plated镀镍	1	6-18	0.05	0.08	0.10	0.15	0.20	0.25	2016.06.16	WEIGHT 重量(g)
4	inner conductor中心针	BeCu 镀铜	gold plated镀金	1	18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY	PERSPECTIVE 视角方法
3	Fastening ring紧固圈	BeCu 镀铜		1	30-50	0.10	0.15	0.20	0.25	0.30	0.50	APPROVED BY	ITEM NO品号
2	insulator绝缘体	PTFE 铁氟龙		1	50-80	0.15	0.20	0.25	0.35	0.50	0.65		PART DESCRIPTION品名
1	body壳体	brass 黄铜	nickel plated镀镍	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80		SHM. 900. 0001-6
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION(规格)	QTY数量	120-180	0.25	0.35	0.50	0.65	0.80	0.95		FAKRA SMB-C-K1.5-7
					180-250	0.35	0.50	0.65	0.95	0.95	1.15		

