

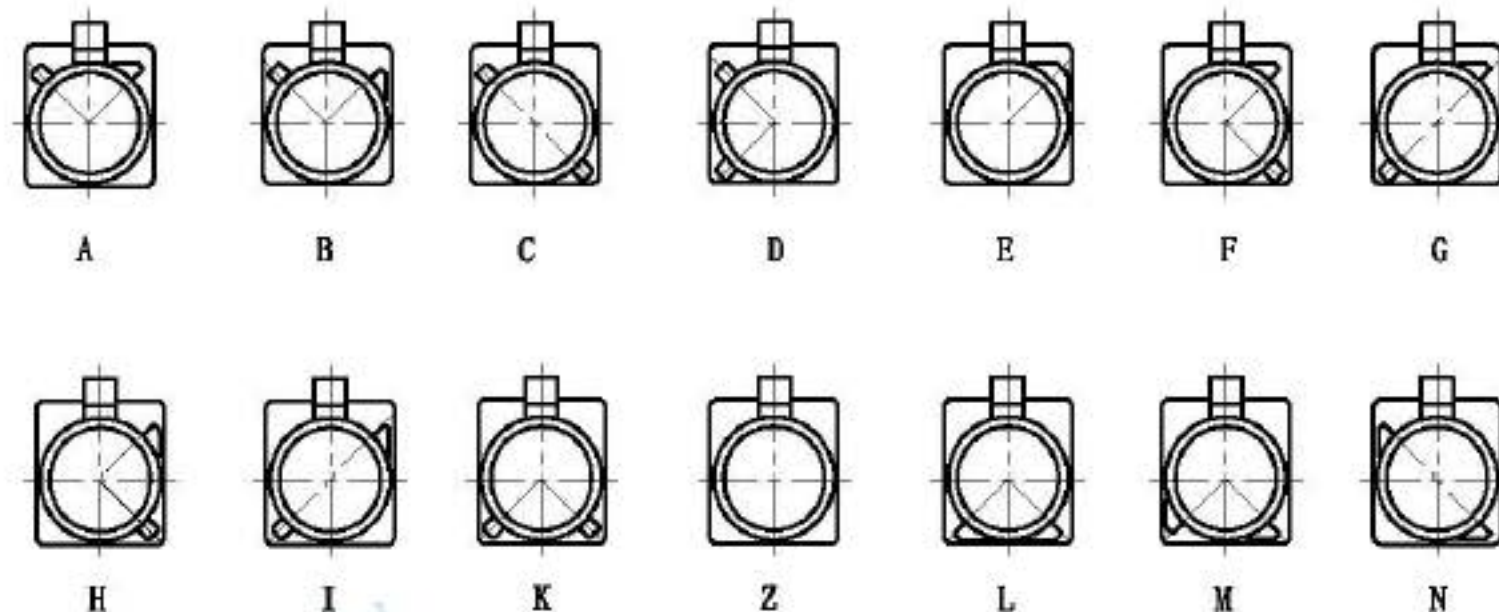
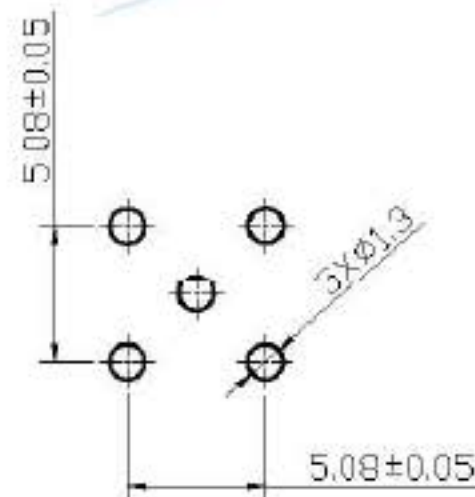
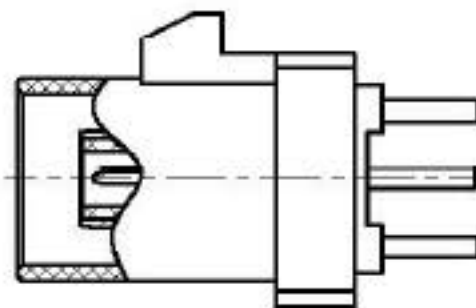
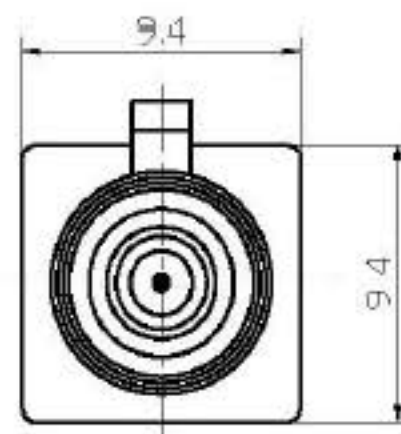
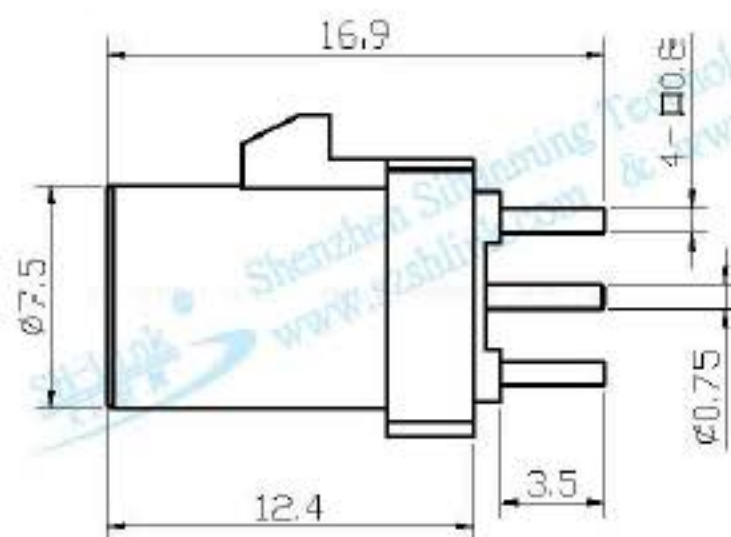
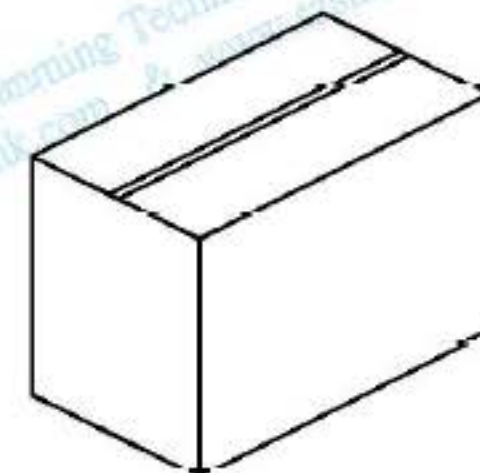


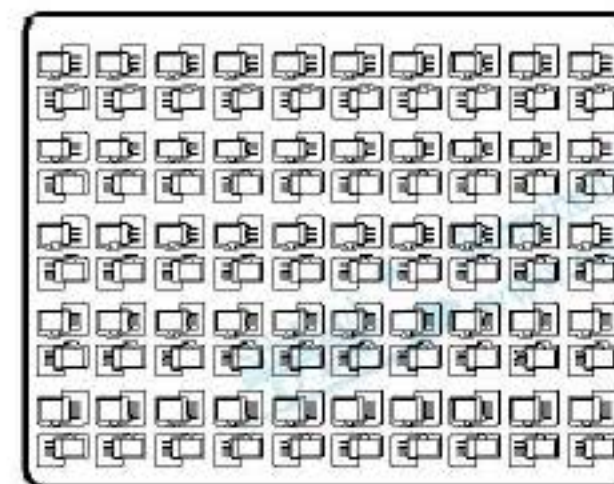


Port Type

Package:
Blister Box: 100 pcs/box
Carton: Yellow Corrugated Carton

包装:
吸塑盒: 100pcs/盒
外箱: 黄色瓦楞纸箱



					Limits	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link® RF 射频				深圳市思翰铭科技有限公司 Shenzhen Sihanming Technology Co.,Ltd			
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY		SCALE 比例	2.5:1	WEIGHT 重量(g)	1.62	PERSPECTIVE 视角方法			
					6-18	0.05	0.08	0.10	0.15	0.20	0.25										
4	Plastic shell外壳	PA66+30%GF		1	18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY		ITEM NO品号		PART DESCRIPTION品名					
3	Insulator绝缘体	PTFE聚四氟乙烯		1	30-50	0.10	0.15	0.20	0.25	0.30	0.50										
2	Pin contact中心针	Brass黄铜	Gold plated 镀金	1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY		SHM. 900.0006-8		FAKRA SMB-50JE-1					
1	Body壳体	Brass黄铜	Gold plated 镀金	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80										
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量	120-180	0.25	0.35	0.50	0.65	0.80	0.95										
					180-250	0.35	0.50	0.65	0.95	0.95	1.15										
	1	2	3	4	5				6			7		8		9		10			

