
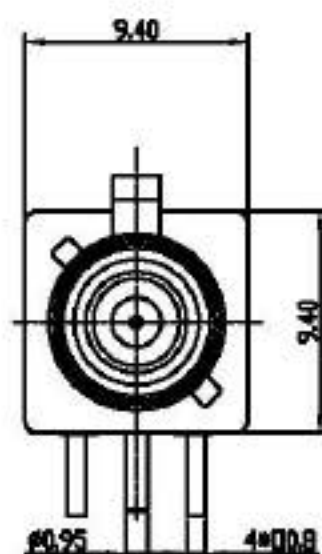


RoHS Outline Drawing

外观图

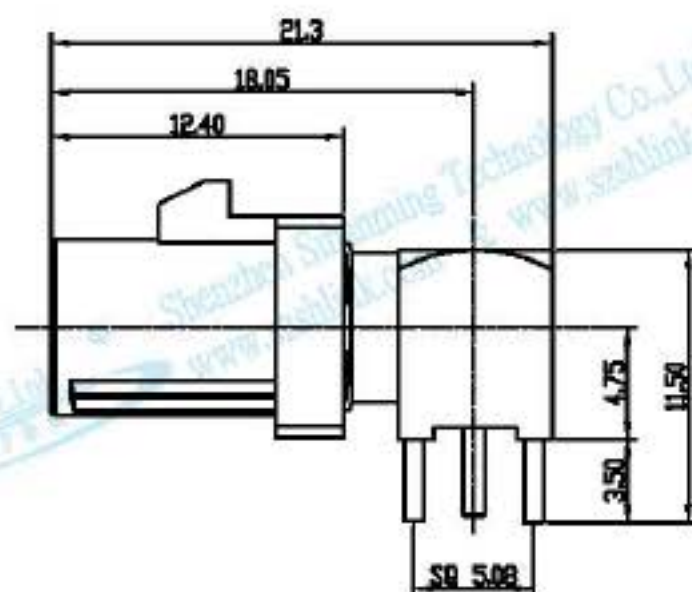

A

B

C

D

E

F

G



H

I

K




Z

L

M

N

Port Type

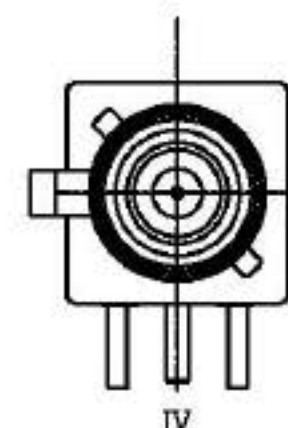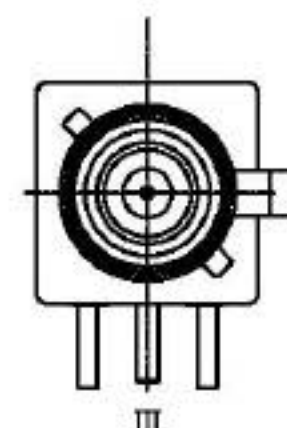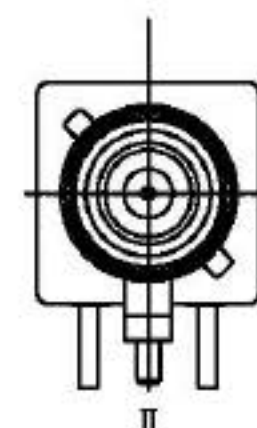

I

II

III

IV

Package:




Blister Box: 100 pcs/box

Carton: Yellow Corrugated Carton

包装:

吸塑盒: 100pcs/盒

外箱: 黄色瓦楞纸箱

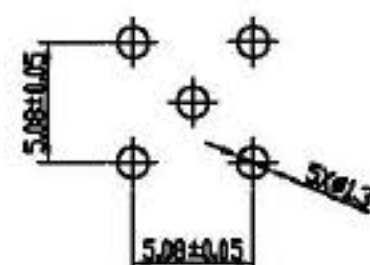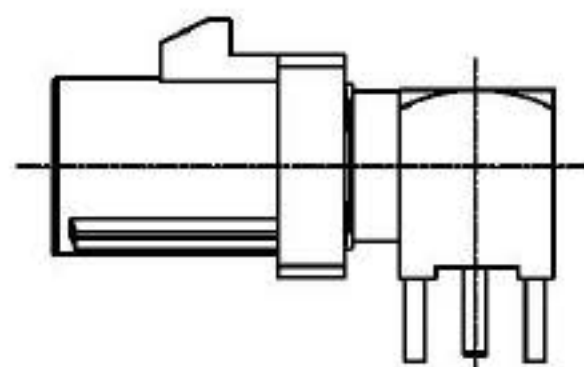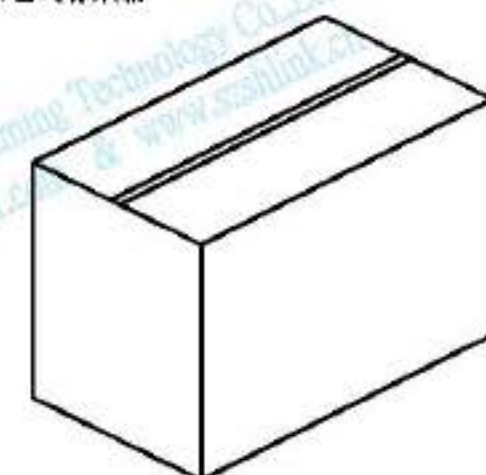

建议PCB印刷尺寸

9	Plastic shell外壳	PA66+30%GF		1
8	Cover后盖	Brass黄铜	Nickel plated 镀镍	1
7	Insulator绝缘体	LCP		1
6	Insulator绝缘体	PTFE聚四氟乙烯		1
5	Insulator绝缘体	PTFE聚四氟乙烯		1
4	Pin contact中心针	Phosphor bronze磷铜	Gold plated 镀金	1
3	Cover后盖	Brass黄铜	Nickel plated 镀镍	1
2	Body前壳	Brass黄铜	Nickel plated 镀镍	1
1	Body后座	Brass黄铜	Gold plated 镀金	1
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量

Limits	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)
0-6	0.03	0.05	0.08	0.10	0.15	0.20
6-18	0.05	0.08	0.10	0.15	0.20	0.25
18-30	0.08	0.10	0.15	0.20	0.25	0.35
30-50	0.10	0.15	0.20	0.25	0.30	0.50
50-80	0.15	0.20	0.25	0.35	0.50	0.65
80-120	0.20	0.25	0.30	0.50	0.65	0.80
120-180	0.25	0.35	0.50	0.65	0.80	0.95
180-250	0.35	0.50	0.65	0.95	0.95	1.15

SIGNATURE DATE作成日期

DRAWN BY

胡宁伟

2017.08.30

CHECKED BY

APPROVED BY

SH-Link®
RF射频

深圳市思翰铭科技有限公司

Shenzhen Sihaming Technology Co., Ltd

SCALE

比例

1:1

WEIGHT

重量(g)

PERSPECTIVE

视角方法




ITEM NO品号

PART DESCRIPTION品名

SHM. 900. 0006-34

FAKRA SMB-50JWE-11

Type	Color	Direction	Item No	Type	Color	Direction	Item No	Type	Color	Direction	Item No
A	BLACK (黑色)	I	SHM. 900. 0006-34. A	F	BROWN (棕褐色)	I	SHM. 900. 0006-34. F	Z	WATER BLUE (水蓝色)	I	SHM. 900. 0006-34. Z
		II	SHM. 900. 0006-34. A. II			II	SHM. 900. 0006-34. F. II			II	SHM. 900. 0006-34. Z. II
		III	SHM. 900. 0006-34. A. III			III	SHM. 900. 0006-34. F. III			III	SHM. 900. 0006-34. Z. III
		IV	SHM. 900. 0006-34. A. IV			IV	SHM. 900. 0006-34. F. IV			IV	SHM. 900. 0006-34. Z. IV
B	WHITE (白色)	I	SHM. 900. 0006-34. B	G	GREY (灰色)	I	SHM. 900. 0006-34. G	L	CARMINE RED (桔红色)	I	SHM. 900. 0006-34. L
		II	SHM. 900. 0006-34. B. II			II	SHM. 900. 0006-34. G. II			II	SHM. 900. 0006-34. L. II
		III	SHM. 900. 0006-34. B. III			III	SHM. 900. 0006-34. G. III			III	SHM. 900. 0006-34. L. III
		IV	SHM. 900. 0006-34. B. IV			IV	SHM. 900. 0006-34. G. IV			IV	SHM. 900. 0006-34. L. IV
C	BLUE (蓝色)	I	SHM. 900. 0006-34. C	H	VIOLET (粉红色)	I	SHM. 900. 0006-34. H	M	PASTEL ORANGE (橙色)	I	SHM. 900. 0006-34. M
		II	SHM. 900. 0006-34. C. II			II	SHM. 900. 0006-34. H. II			II	SHM. 900. 0006-34. M. II
		III	SHM. 900. 0006-34. C. III			III	SHM. 900. 0006-34. H. III			III	SHM. 900. 0006-34. M. III
		IV	SHM. 900. 0006-34. C. IV			IV	SHM. 900. 0006-34. H. IV			IV	SHM. 900. 0006-34. M. IV
D	BORDEAUX VIOLET (紫红色)	I	SHM. 900. 0006-34. D	I	BEIGE (米黄色)	I	SHM. 900. 0006-34. I	N	PASTEL GREEN (浅绿色)	I	SHM. 900. 0006-34. N
		II	SHM. 900. 0006-34. D. II			II	SHM. 900. 0006-34. I. II			II	SHM. 900. 0006-34. N. II
		III	SHM. 900. 0006-34. D. III			III	SHM. 900. 0006-34. I. III			III	SHM. 900. 0006-34. N. III
		IV	SHM. 900. 0006-34. D. IV			IV	SHM. 900. 0006-34. I. IV			IV	SHM. 900. 0006-34. N. IV
E	GREEN (军绿色)	I	SHM. 900. 0006-34. E	K	CURRY(土黄色)	I	SHM. 900. 0006-34. K				
		II	SHM. 900. 0006-34. E. II			II	SHM. 900. 0006-34. K. II				
		III	SHM. 900. 0006-34. E. III			III	SHM. 900. 0006-34. K. III				
		IV	SHM. 900. 0006-34. E. IV			IV	SHM. 900. 0006-34. K. IV				

					Limits	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link [®] RF 射频		深圳市思翰铭科技有限公司 Shenzhen Sihanming Technology Co.,Ltd			
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY		SCALE 比例	2:1	WEIGHT 重量(g)	PERSPECTIVE 视角方法		
					6-18	0.05	0.08	0.10	0.15	0.20	0.25								
					18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY							
					30-50	0.10	0.15	0.20	0.25	0.30	0.50								
					50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY		ITEM NO品号		PART DESCRIPTION品名			
					80-120	0.20	0.25	0.30	0.50	0.65	0.80								
					120-180	0.25	0.35	0.50	0.65	0.80	0.95								
					180-250	0.35	0.50	0.65	0.95	0.95	1.15								
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格		QTY数量											SHM. 900.0006-34		FAKRA SMB-50JWE-11	
1		2	3		4	5		6		7		8		9		10			