
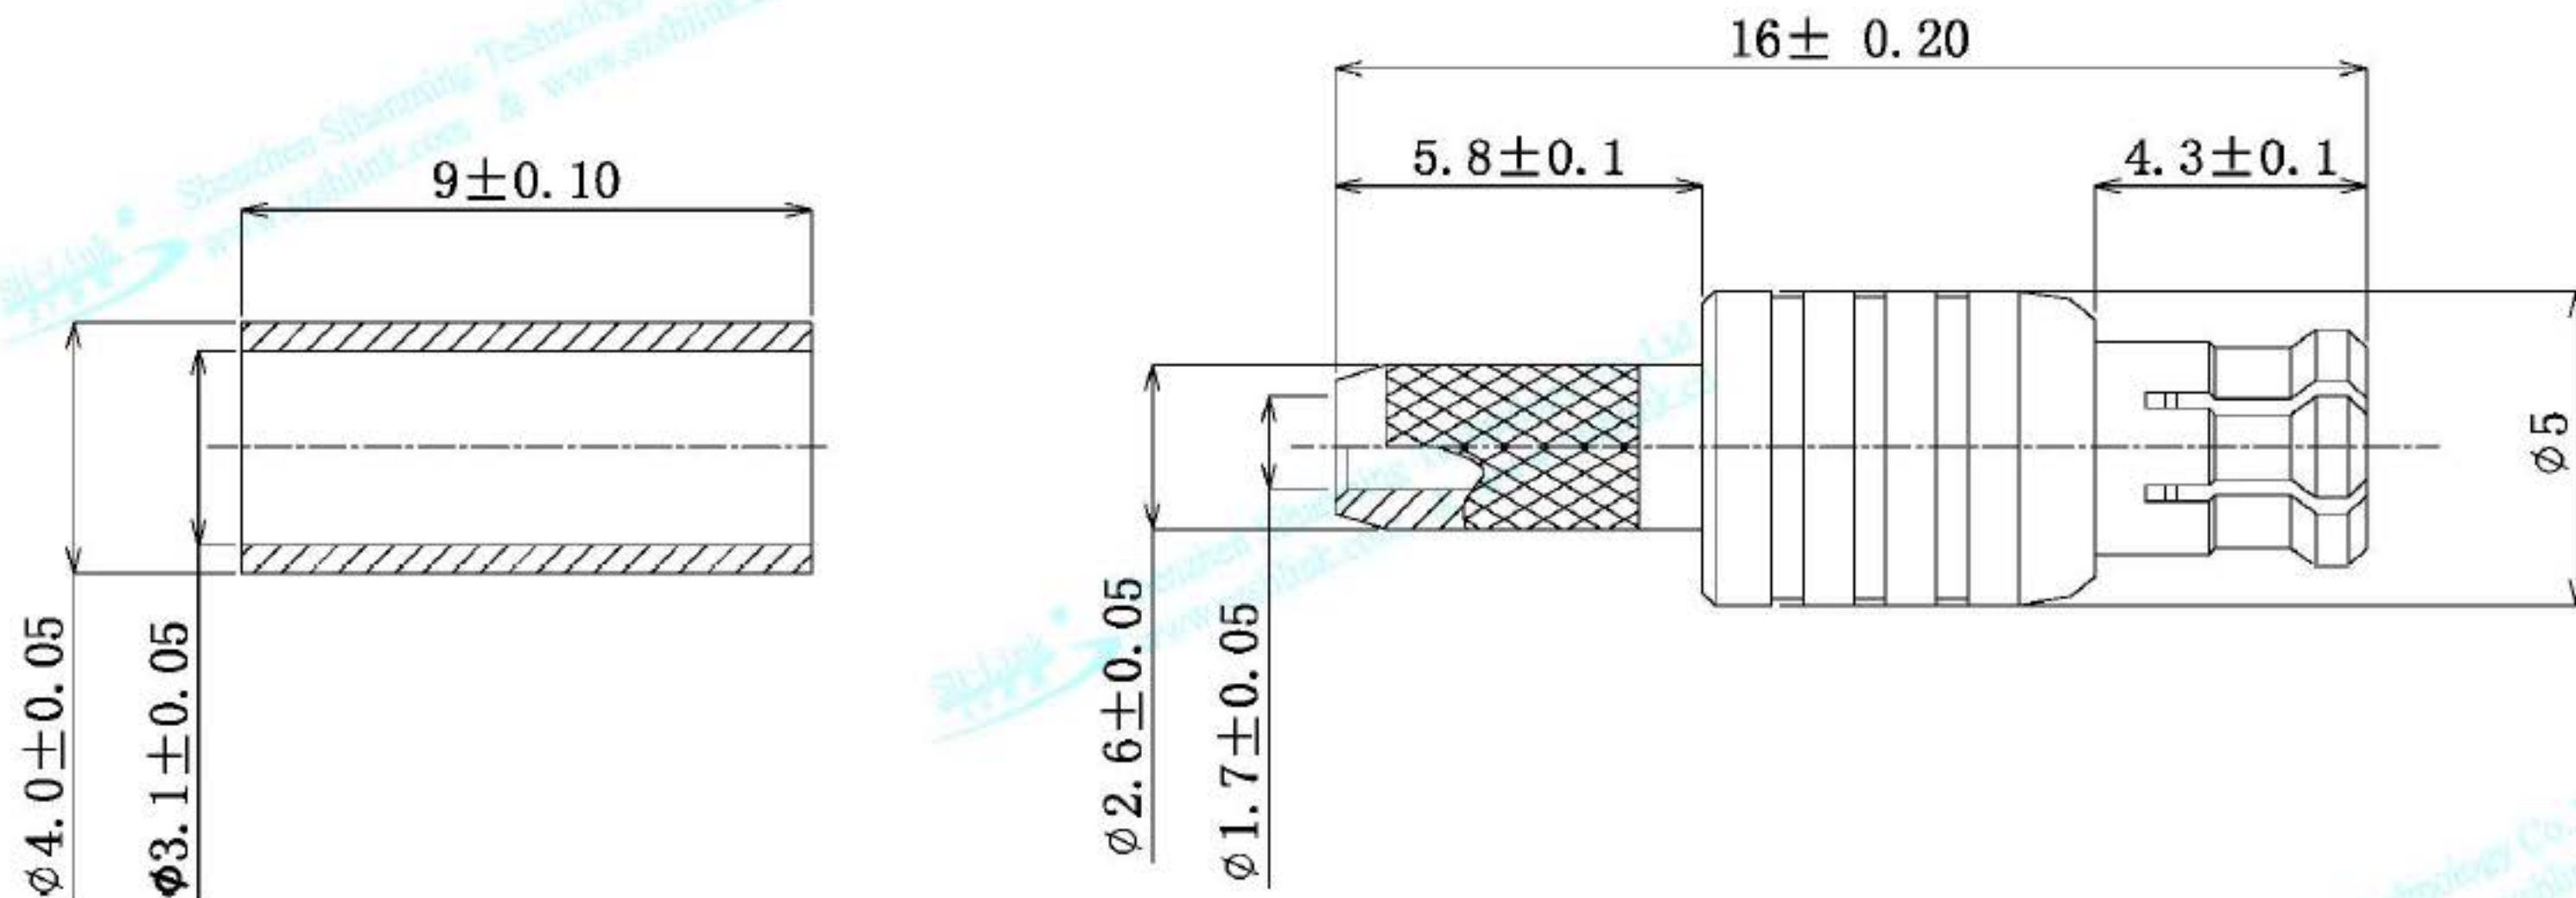




电气性能:

1. 特性阻抗: 50Ω
2. 频率范围: DC-3GHz
3. VSWR < 1.3
4. 盐雾过48小时.

适配线缆: SFF-50-1.5-1, RG-174, RG-316

					Limits	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link® 深圳市思翰铭科技有限公司 RF 射频 Shenzhen Sihanning Technology Co.,Ltd					
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY	胡宁伟 2016.06.02	SCALE 比例		WEIGHT 重量(g)		PERSPECTIVE 视角方法	
5	copper pipe 铜管	Brass黄铜	Gold plated镀金1U"	1	6-18	0.05	0.08	0.10	0.15	0.20	0.25								
4	Contact head 接触头	Qsn6.5-1锡青铜	Gold plated镀金1U"	1	18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY							
3	Insulator绝缘体	PTFE铁氟龙		1	30-50	0.10	0.15	0.20	0.25	0.30	0.50								
2	Inner conductor中心针	Qsn6.5-1锡青铜	Gold plated镀金2U"	1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY							
1	Body外壳	Brass黄铜	Gold plated镀金1U"	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80								
					120-180	0.25	0.35	0.50	0.65	0.80	0.95			SH3.650.1302					
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量	180-250	0.35	0.50	0.65	0.95	0.95	1.15								
1		2	3	4	5		6		7		8		9		10				