
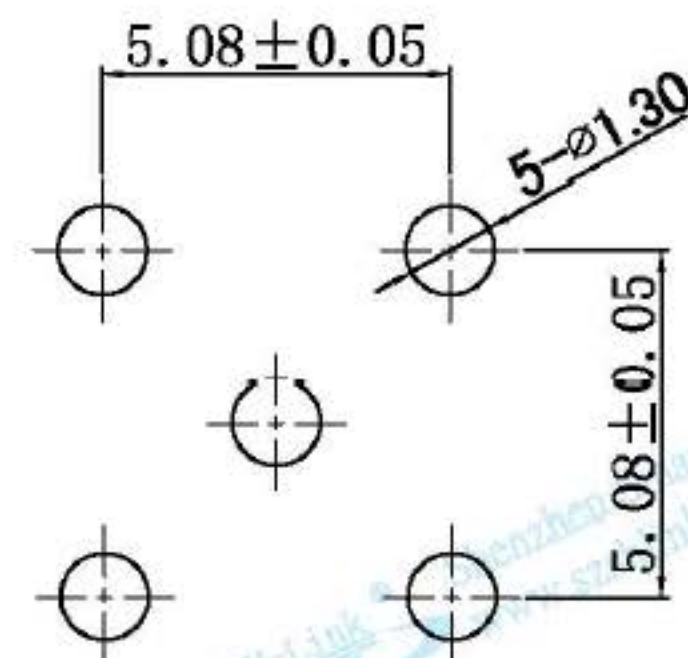
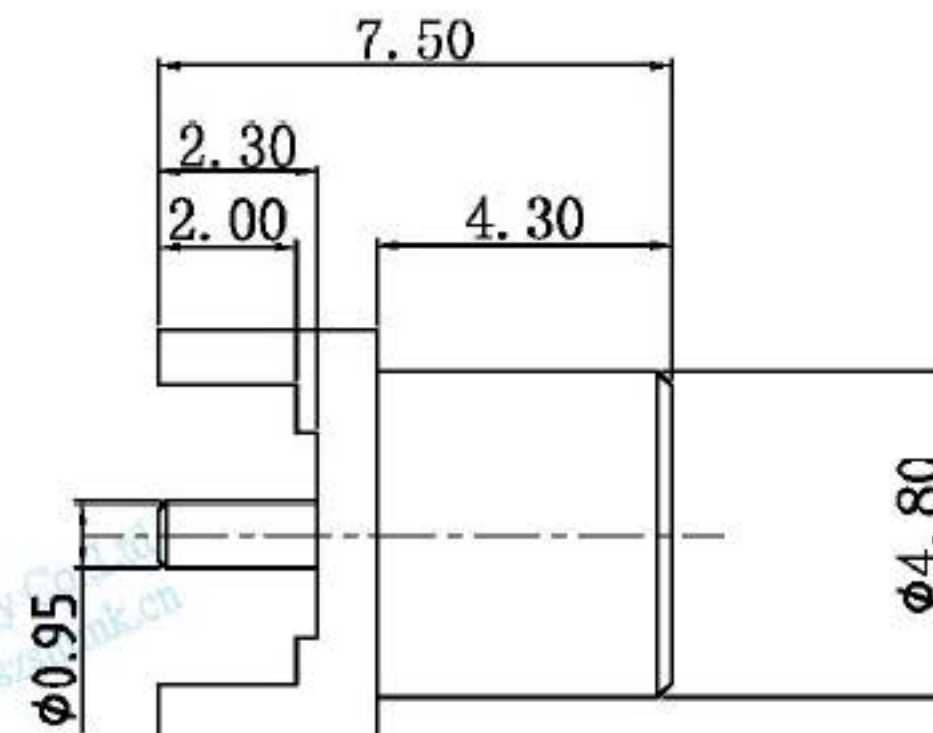


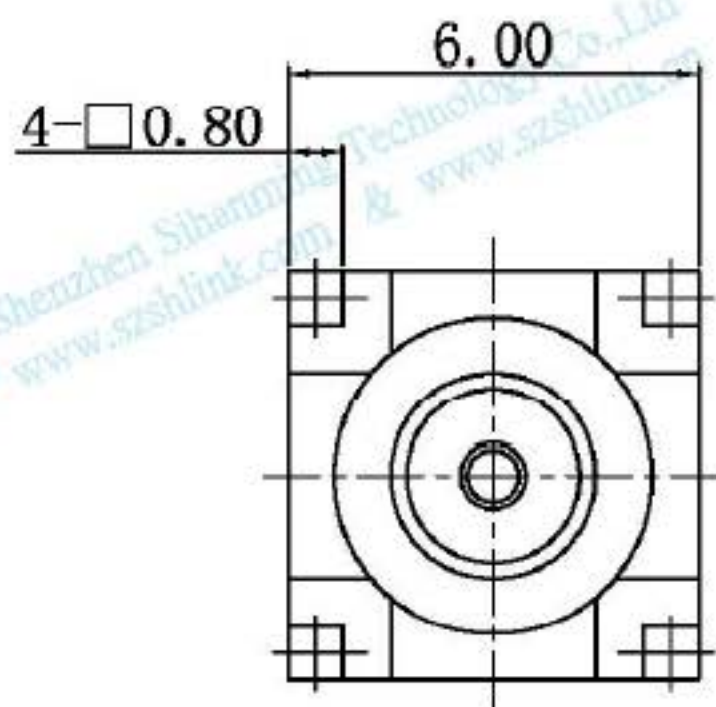

建议PCB安装尺寸

- 1.特性阻抗: $50\ \Omega$
- 2.频率范围: DC-6GHz
- 3.工作电压: 250V
- 4.接触电阻: 内导体: $\leq 5\text{m}\ \Omega$; 外导体 $\leq 2.5\text{m}\ \Omega$
- 5.绝缘电阻: $\geq 1000\ \text{M}\ \Omega$
- 6.介质耐压: 750V

1. 内导体分离力: $>0.28\text{N}$
2. 机械寿命: >500 次 (每分钟12次)

C、包装：吸塑盒包装

					Limits	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE	DATE作成日期	SH-Link® 深圳市思翰铭科技有限公司 RF 射频 Shenzhen Sihanning Technology Co., Ltd			
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY	胡宁伟 2017.03.25	SCALE 比例	WEIGHT 重量(g)	PERSPECTIVE 视角方法	
					6-18	0.05	0.08	0.10	0.15	0.20	0.25						
					18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY		ITEM NO品号	PART DESCRIPTION品名		
					30-50	0.10	0.15	0.20	0.25	0.30	0.50						
3	Insulator绝缘体	PTFE 铁弗龙		1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY		SH3. 660. 108	MCX-KE		
2	Inner conductor中心针	BeCu 镀铜	GOLD PLATED 镀金	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80						
1	Body壳体	Brass 黄铜	GOLD PLATED 镀金	1	120-180	0.25	0.35	0.50	0.65	0.80	0.95						
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量	180-250	0.35	0.50	0.65	0.95	0.95	1.15						