
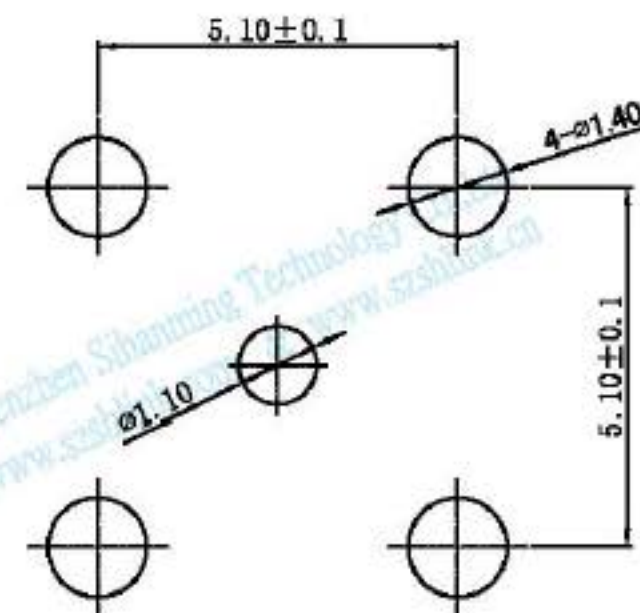
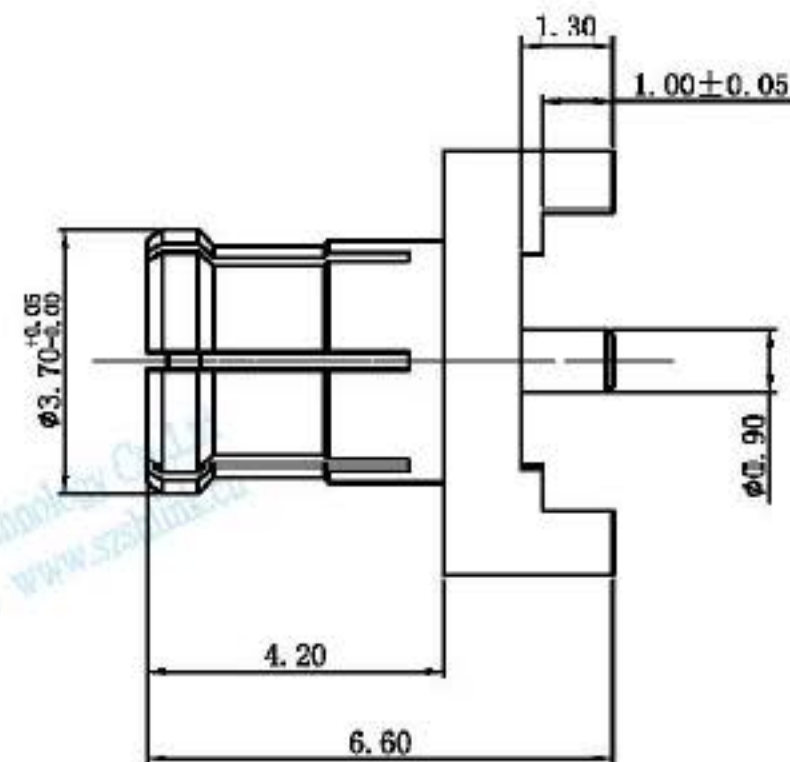


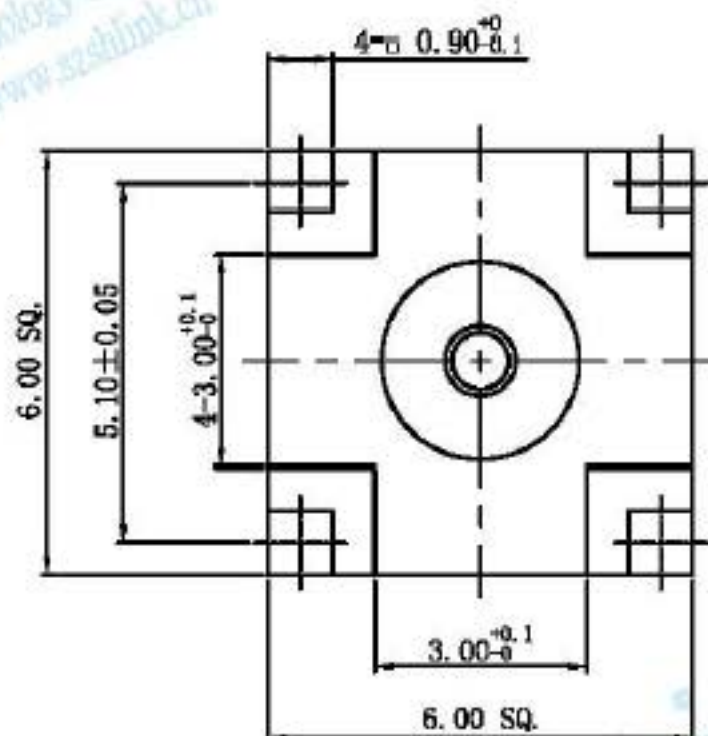

特性阻抗 (Impedance)	50 Ω
工作电压 (Voltage rating)	250V (rms)
频率范围 (Frequency range)	0~3 GHz
驻波比 (V. S. W. R)	≤ 1.25
介质耐压 (Dielectric withstanding voltage)	750V (rms)
接触电阻 (Contact resistance)	内导体 (Center contact) $\leq 5.0 \text{ m}\Omega$
	外导体 (Outer contact) $\leq 2.5 \text{ m}\Omega$
绝缘电阻 (Insulation resistance)	$>1000 \text{ M}\Omega$
盐雾 (Salt spray test)	48小时
机械耐久性 (Durability)	$>100 \text{ cycles}$
工作温度 (Temperature range)	$-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

要求: 1. 表面鍍金;
2. 包裝方式: 吸塑盒包裝, 100PCS/盒;

建议安装开孔尺寸

					Limits unit:mm	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link [®] 深圳市思翰铭科技有限公司 R F 舒康 Shenzhen Sihanming Technology Co.,Ltd			
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY 伍远航	2018.09.11	SCALE 比例 1:1	WEIGHT 重量(g)	PERSPECTIVE 视角方法	
					6-18	0.05	0.08	0.10	0.15	0.20	0.25						
					18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY					
					30-50	0.10	0.15	0.20	0.25	0.30	0.50						
3	Insulator绝缘体	PTFE 铁弗龙		1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY		ITEM NO品号	PART DESCRIPTION品名		
2	Pin contact中心针	Brass黄铜	GOLD PLATED 镀金8u"	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80						
1	Body壳体	Phosphor bronze 磷铜	GOLD PLATED 镀金4u"	1	120-180	0.25	0.35	0.50	0.65	0.80	0.95			SHM.010.011	MCX-50JE-2		
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量	180-250	0.35	0.50	0.65	0.95	1.15							
	1	2	3	4		5				6			7	8	9		10