

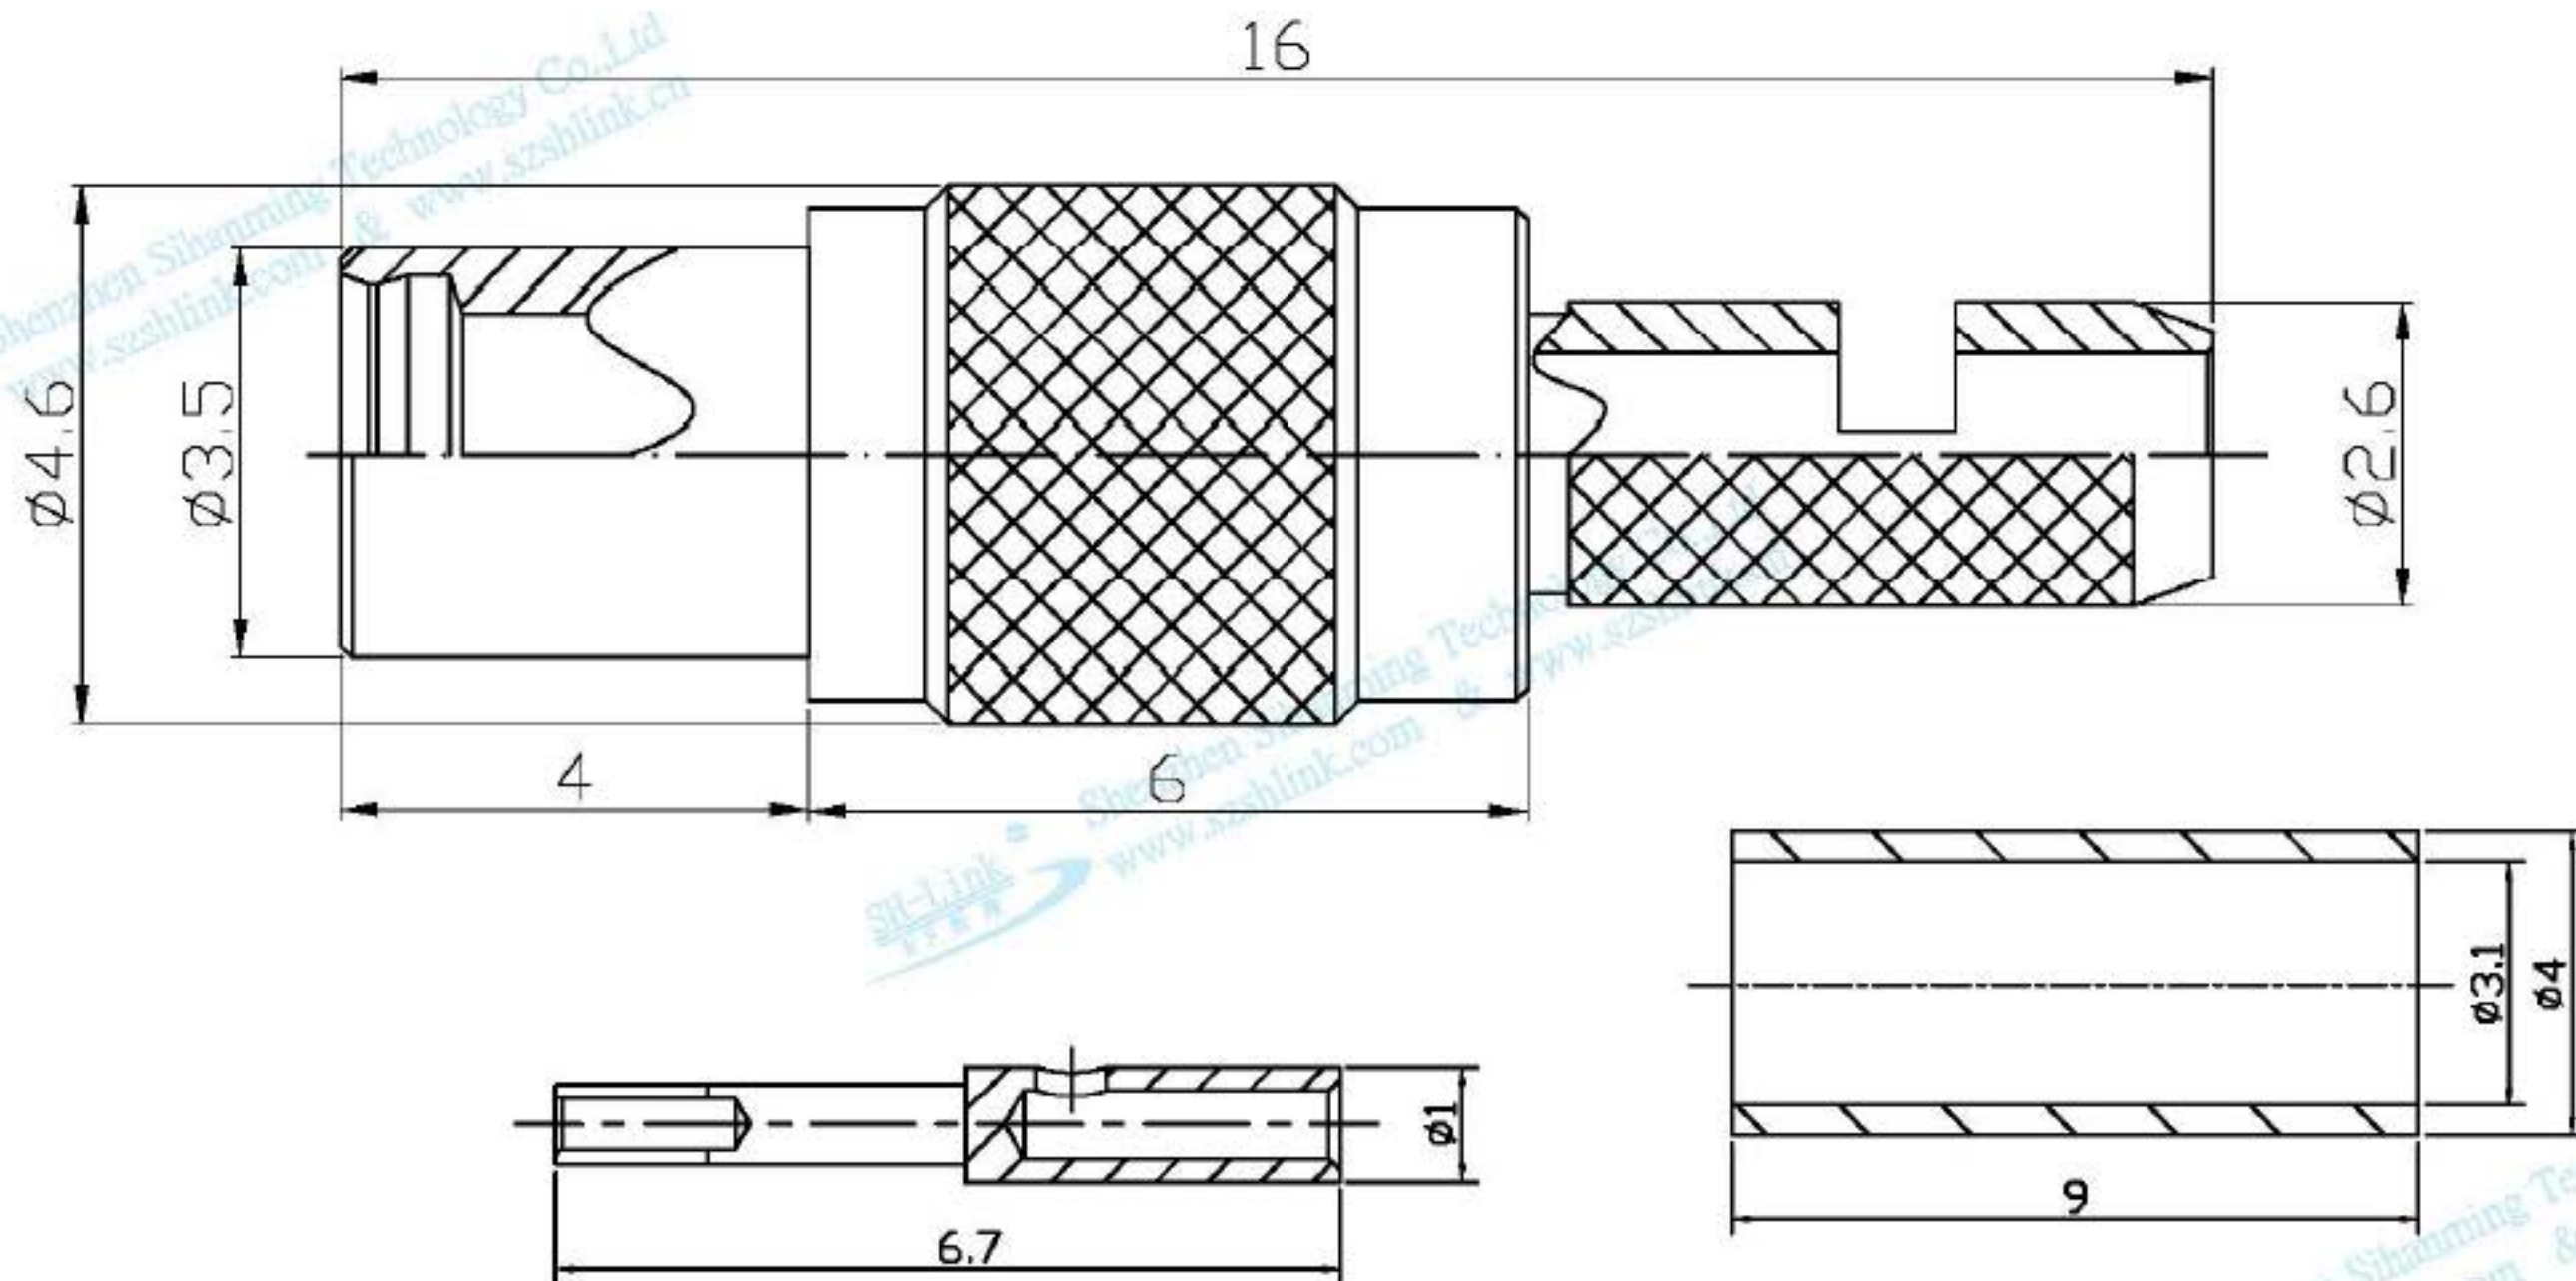


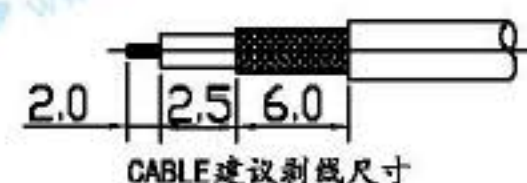

- 要求: 1.表面镀金
2.本体须与各配件分开包装
3.包装方式:各100PCS/袋,共同装入大PE袋内
4.用于RG174/316线缆。



					Limits	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link® RF 射频		深圳市思翰铭科技有限公司 Shenzhen Sihanning Technology Co.,Ltd			
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY 肖仕伟	2016.07.08	SCALE 比例		WEIGHT 重量(g)		PERSPECTIVE 视角方法	
					6-18	0.05	0.08	0.10	0.15	0.20	0.25								
5	Copper pipe 铜管	Brass 黄铜	NICKEL PLATED 镀镍	1	18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY							
4	Backseat 后塞	Brass 黄铜	GOLD PLATED 镀金	1	30-50	0.10	0.15	0.20	0.25	0.30	0.50								
3	Insulator绝缘体	PTFE 铁弗龙		1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY							
2	Inner conductor中心针	Beryllium copper铍铜	GOLD PLATED 镀金	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80								
1	Body壳体	Brass 黄铜	GOLD PLATED 镀金	1	120-180	0.30	0.35	0.40	0.50	0.60	0.90								
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量	180-250	0.35	0.50	0.65	0.95	0.95	1.15								
1		2	3	4	5		6		7		8		9		10				