
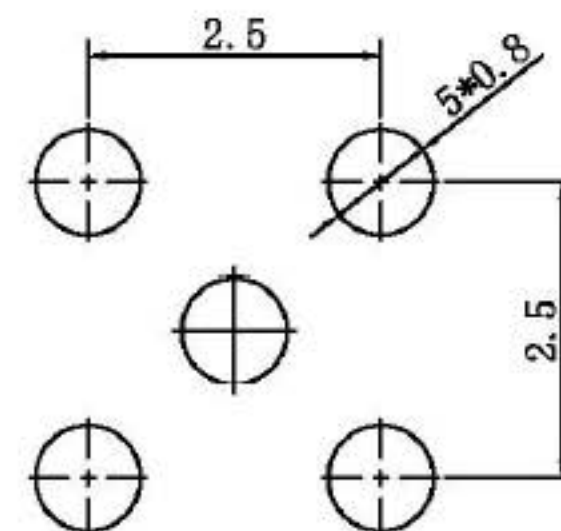
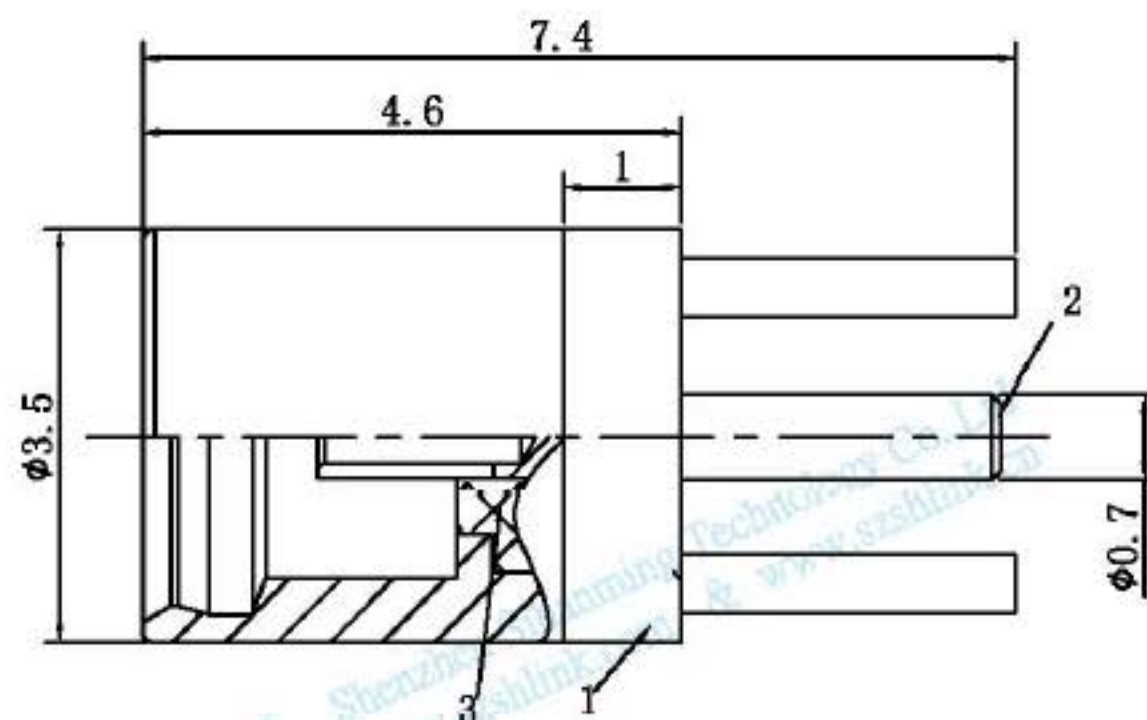


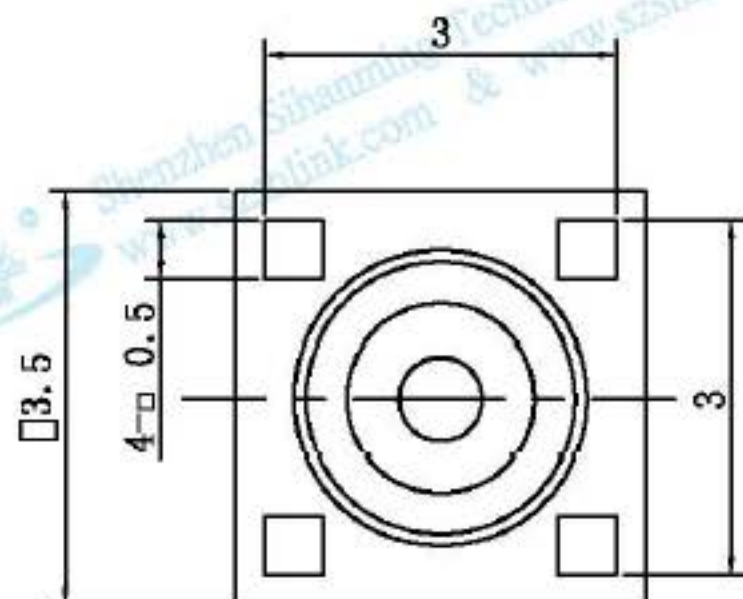



说明:

1. 用于50Ω, 频率6GHz.
2. 中心针、绝缘组装到位.
3. 电镀有做油封处理.
4. 包装: 吸塑盒(195*125), 每盘100pcs.

技术特性:

1. 表面镀金10μ;
2. 盐雾测试48小时;
3. 插拔力要求: 8~25N;
4. 温度范围: -55~+155°C;
5. 工作电压: 170V r.m.s at sea level
6. 耐压: 500V r.m.s at sea level
7. 接触电阻: 外导体: ≤2.5mΩ 内导体: ≤5 mΩ
8. 绝缘电阻: ≥1000 mΩ
9. 耐用性: ≥500次
10. 插入损耗: 0.18dB/1GHz

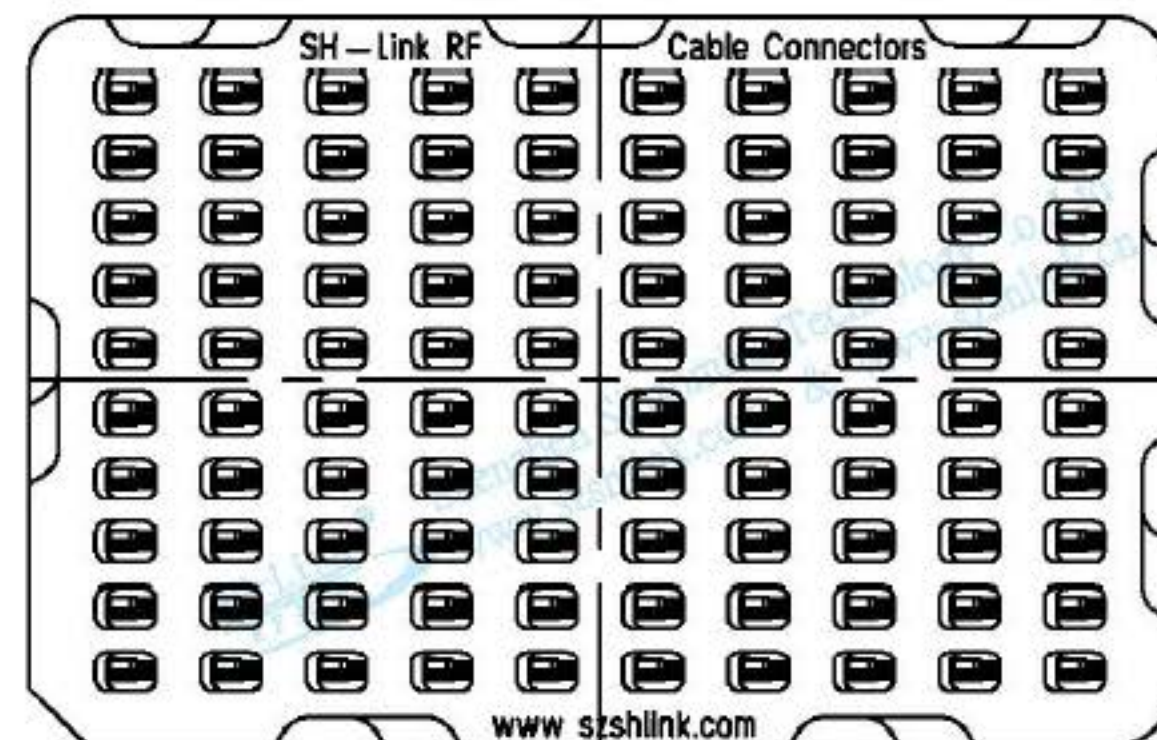

					Limits	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link® RF 射频		深圳市思翰铭科技有限公司 Shenzhen Sihanming Technology Co.,Ltd			
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY 许嘉庚 2015.05.25		SCALE 比例		WEIGHT 重量(g)		PERSPECTIVE 视角方法	
					6-18	0.05	0.08	0.10	0.15	0.20	0.25								
					18-30	0.08	0.10	0.15	0.20	0.25	0.35								
					30-50	0.10	0.15	0.20	0.25	0.30	0.50	CHECKED BY							
3	Insulator绝缘体	PTFE 铁弗龙		1	50-80	0.15	0.20	0.25	0.35	0.50	0.65								
2	Inner conductor中心针	Beryllium copper铍铜	GOLD PLATED 镀金	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80								
1	Body壳体	Brass 黄铜	GOLD PLATED 镀金	1	120-180	0.25	0.35	0.50	0.65	0.80	0.95	APPROVED BY							
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量	180-250	0.35	0.50	0.65	0.95	0.95	1.15								
1		2		3		4		5		6		7		8		9		10	