

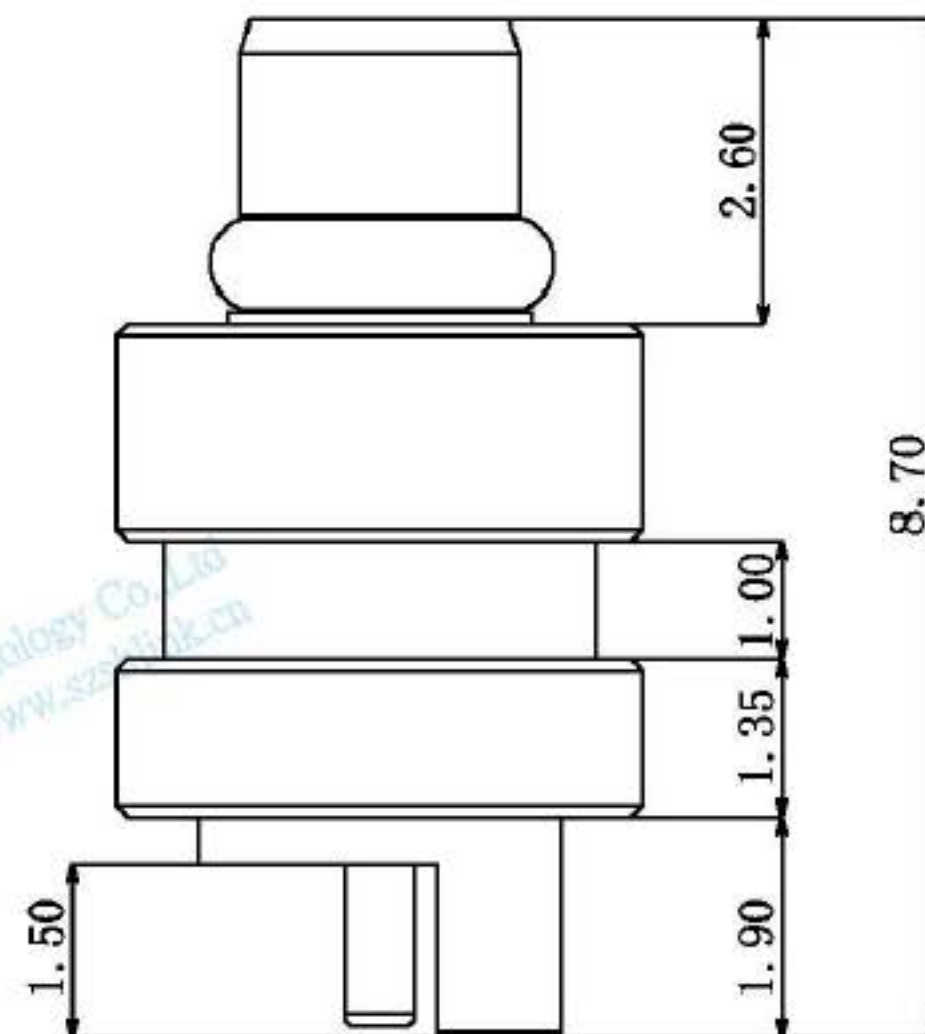
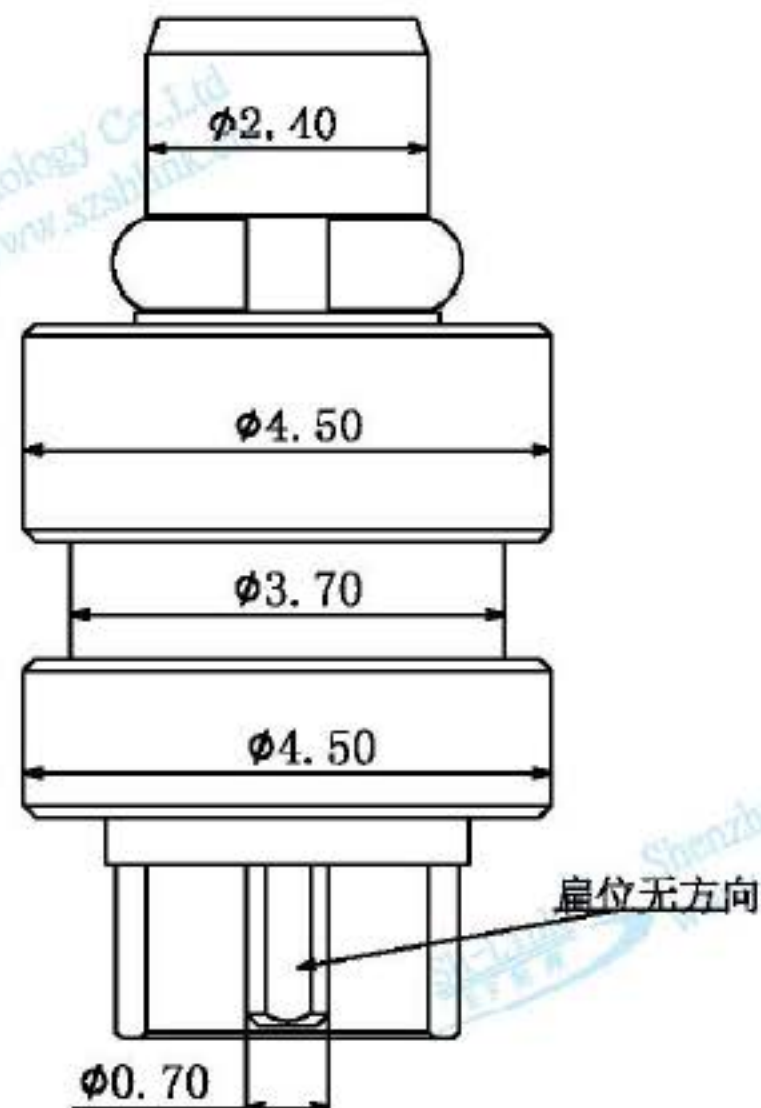
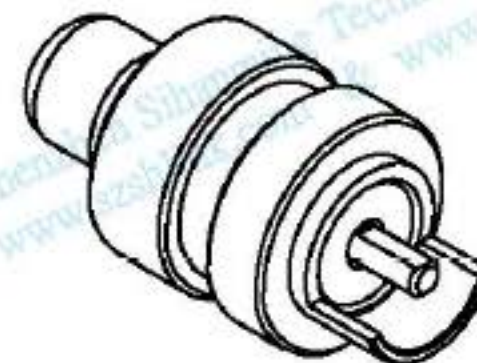


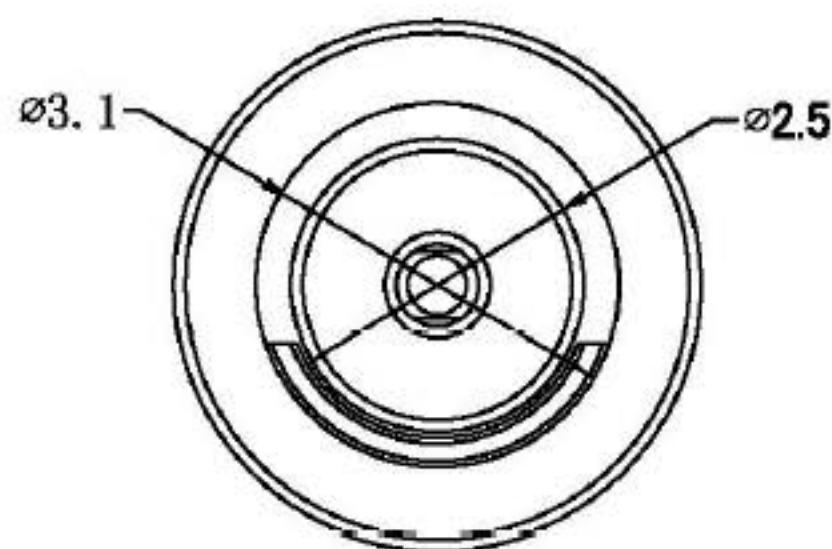

技术要求:
1. 产品镀金
2. PE袋包装:100PCS/袋.



					Limits	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link® 深圳市思翰铭科技有限公司 RF 射频 Shenzhen Sihanming Technology Co.,Ltd			
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY 许嘉庚	2015.07.03	SCALE 比例	WEIGHT 重量(g)	PERSPECTIVE 视角方法	
					6-18	0.05	0.08	0.10	0.15	0.20	0.25						
4	Spring washer卡圈	Beryllium copper铍铜	GOLD PLATED 镀金	1	18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY		ITEM NO品号	PART DESCRIPTION品名		
3	Insulator绝缘体	PTFE 铁弗龙		1	30-50	0.10	0.15	0.20	0.25	0.30	0.50						
2	Inner conductor中心针	Brass 黄铜	GOLD PLATED 镀金	1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY		SHM. 020. 032	MMCX-50JE-8		
1	Body壳体	Brass 黄铜	GOLD PLATED 镀金	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80						
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量	120-180	0.25	0.35	0.50	0.65	0.80	0.95						
					180-250	0.35	0.50	0.65	0.95	0.95	1.15						