



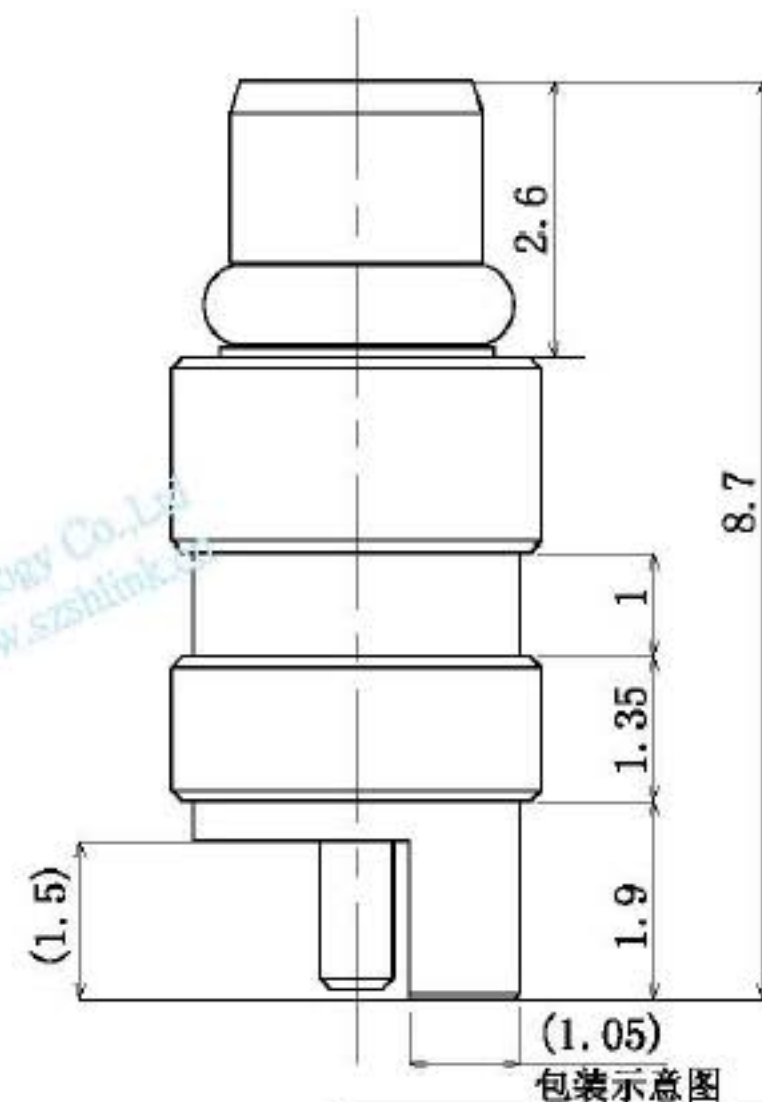

包装示意图

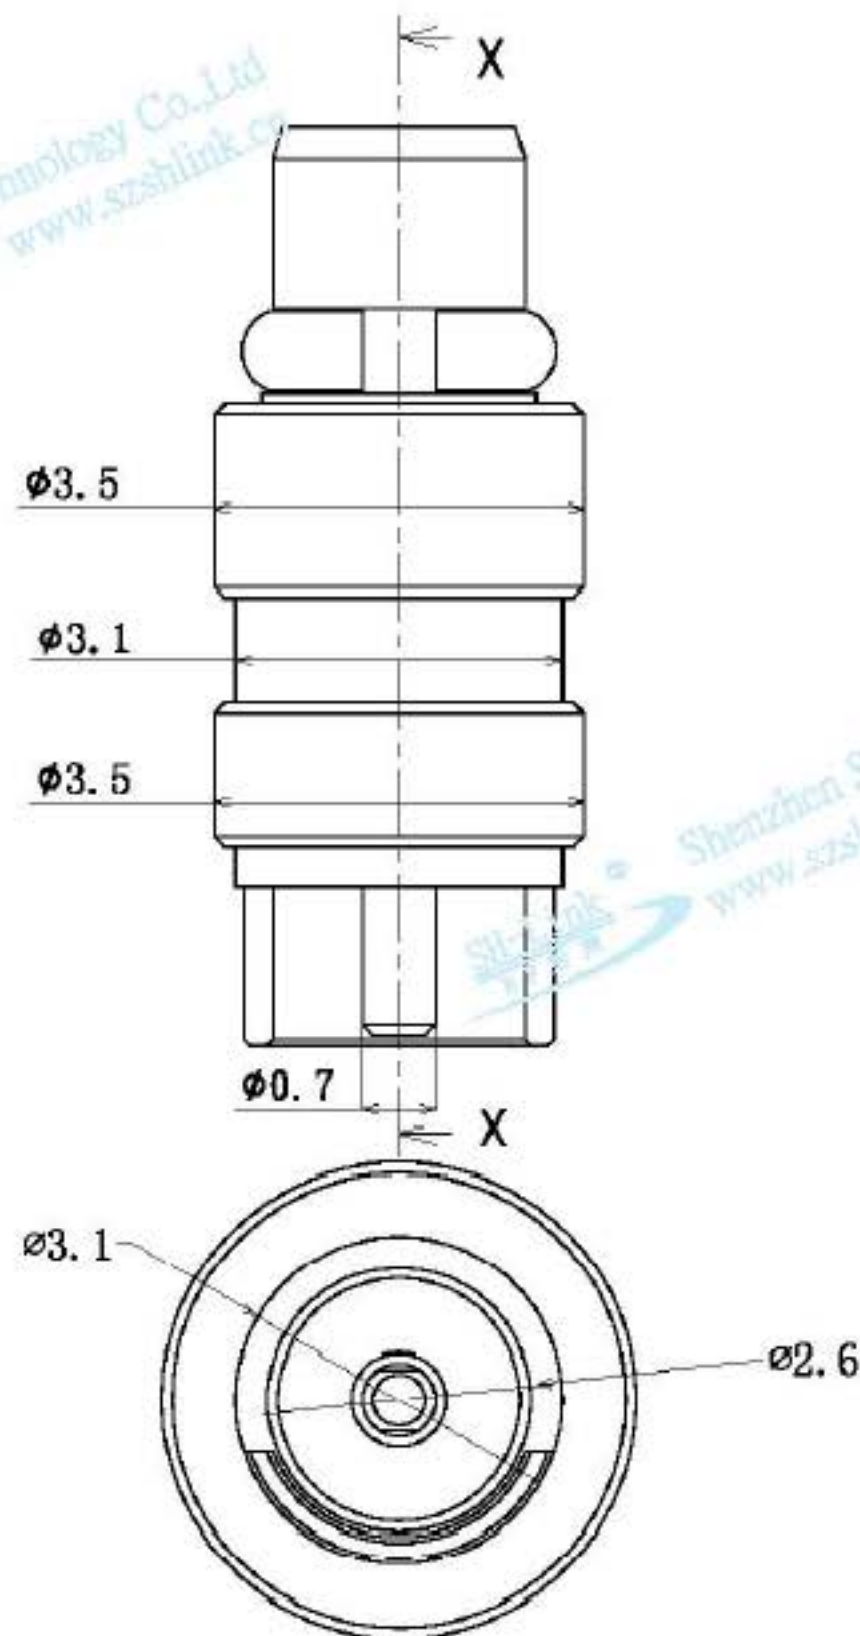

技术要求:

1. 产品表面刮花、漏电镀、伤痕不可.
2. PB袋包装: 100PCS/袋.

					Limits	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link® RF 射频				深圳市思翰铭科技有限公司 Shenzhen Sihanming Technology Co.,Ltd	
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY	胡宁伟 2016.05.27	SCALE 比例	WEIGHT 重量(g)	PERSPECTIVE 视角方法	ITEM NO品号	PART DESCRIPTION品名	
					6-18	0.05	0.08	0.10	0.15	0.20	0.25								
4	Rand卡圈	BeCu铍铜	Gold plated镀金2U"	1	18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY							
3	Insulator绝缘体	PTFE铁氟龙		1	30-50	0.10	0.15	0.20	0.25	0.30	0.50								
2	Inner conductor中心针	Brass黄铜	Gold plated镀金2U"	1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY							
1	Body外壳	Brass黄铜	Gold plated镀金1U"	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80								
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量	120-180	0.25	0.35	0.50	0.65	0.80	0.95								
					180-250	0.35	0.50	0.65	0.95	0.95	1.15								
					5		6		7		8		9		10				