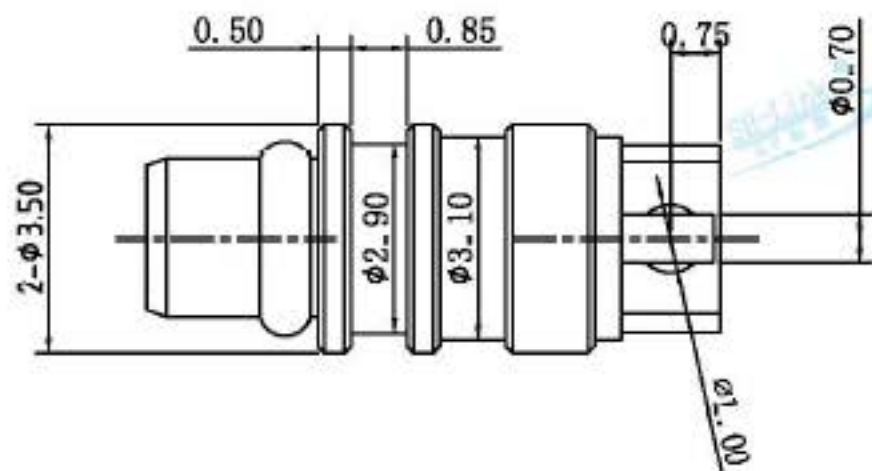
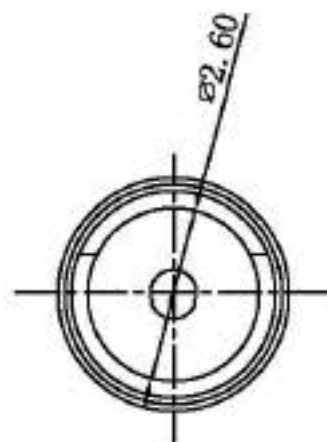
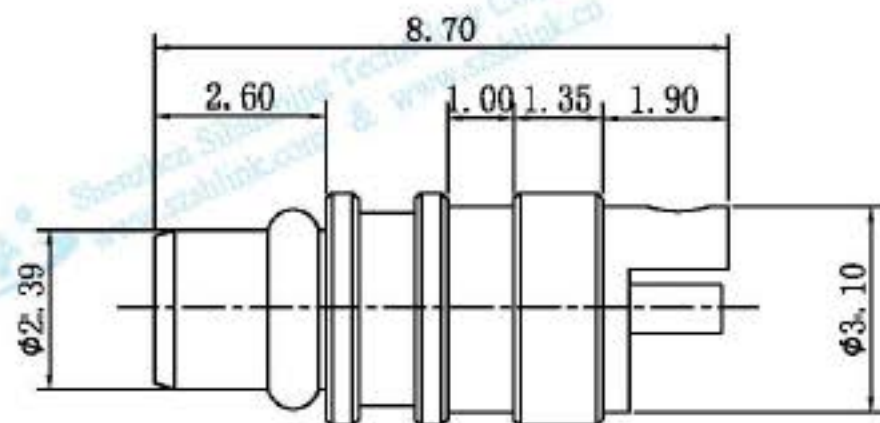


					Limits	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link [®] 深圳市思翰铭科技有限公司 S F 耐 限 Shenzhen Siharming Technology Co., Ltd			
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY 胡宁伟	2016. 11. 22	SCALE 比例	WEIGHT 重量(g)	PERSPECTIVE 视角方法	
					6-18	0.05	0.08	0.10	0.15	0.20	0.25						
4	Band卡圈	BeCu铍铜	Gold plated镀金2U"	1		18-30	0.08	0.10	0.15	0.20	0.25	CHECKED BY		ITEM NO品号	PART DESCRIPTION品名		
3	Insulator绝缘体	PTFE铁氟龙		1		30-60	0.10	0.15	0.20	0.25	0.30						
2	Inner conductor中心针	Brass黄铜	Gold plated镀金2U"	1		60-80	0.15	0.20	0.25	0.35	0.50	APPROVED BY		SHM. 020. 041	MMCX-50JE-1		
1	Body外壳	Brass黄铜	Gold plated镀金1U"	1		80-120	0.20	0.25	0.30	0.50	0.65						
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量		120-180	0.25	0.35	0.50	0.65	0.80	0.95					
						180-250	0.35	0.50	0.65	0.95	0.95	1.15					