
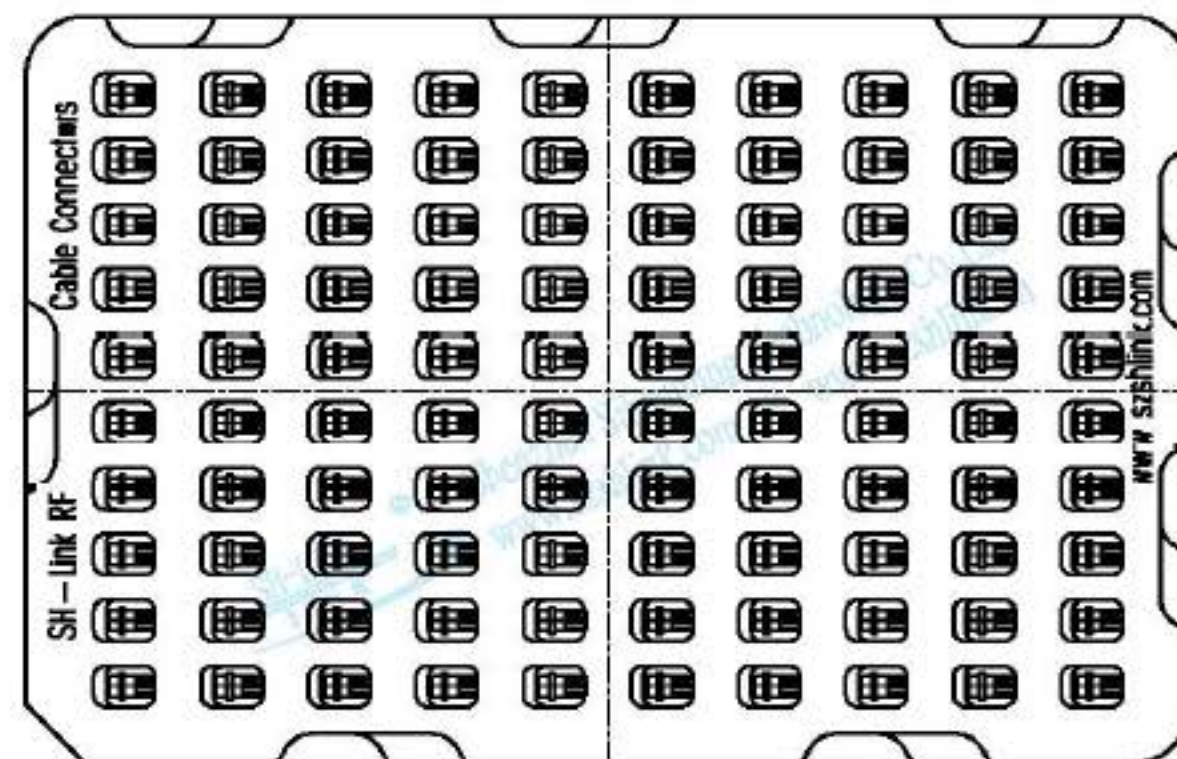
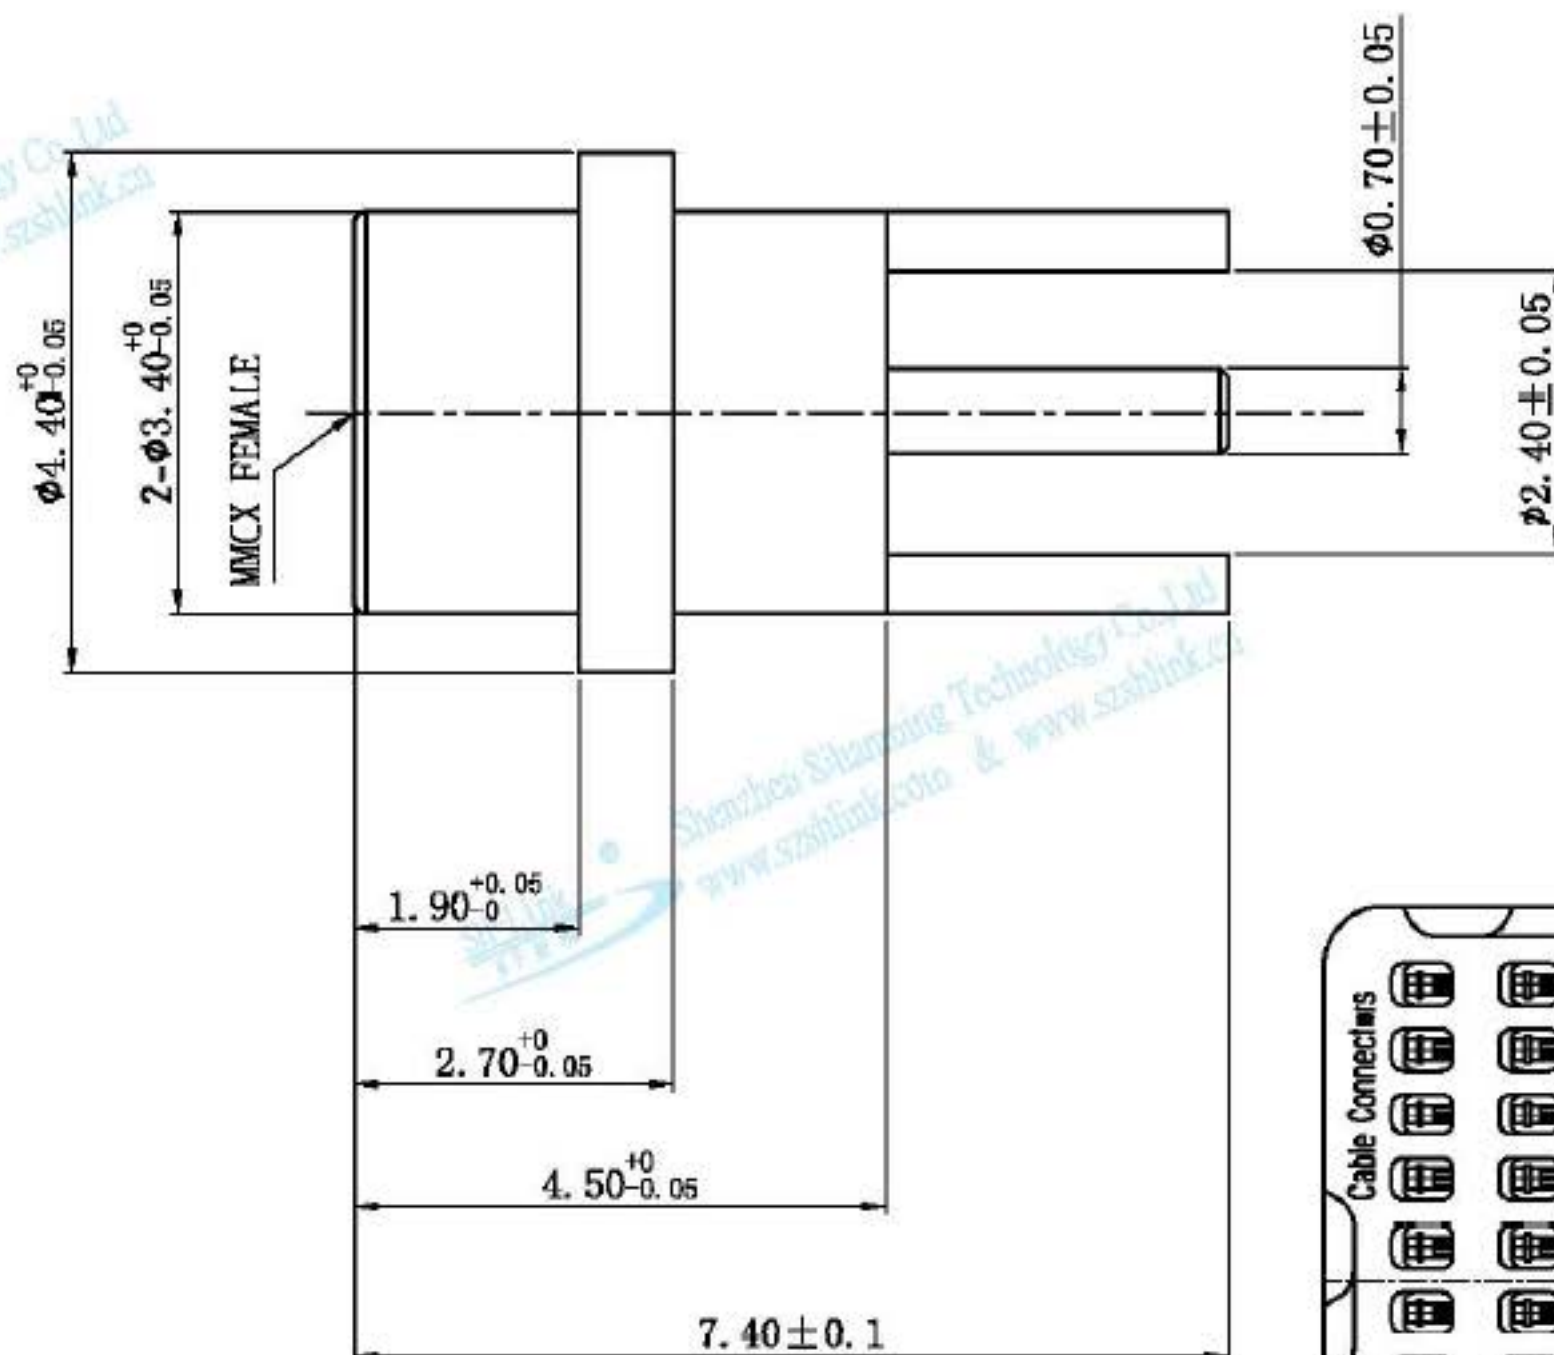


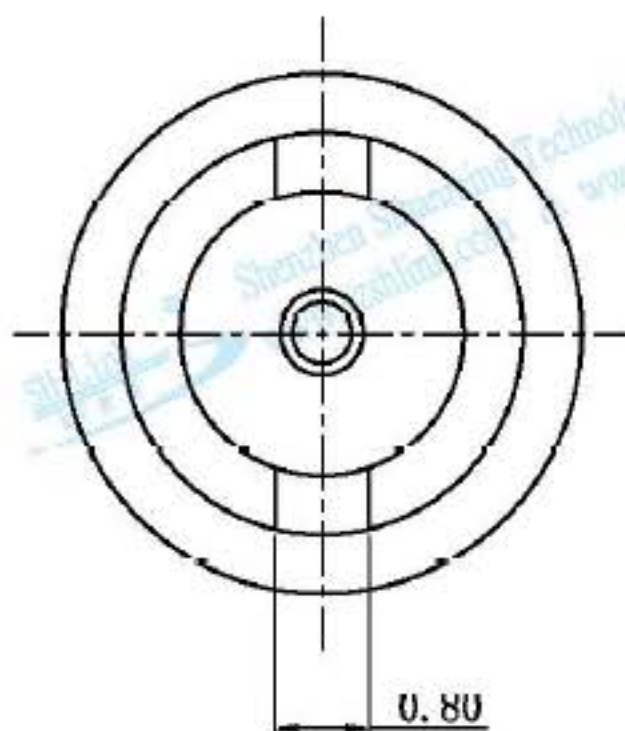

2. 包裝: 吸塑盒(195*125), 每盒100pcs.

					Limits unit:mm	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link [®] 深圳市思翰铭科技有限公司 RF 射频 Shenzhen Sihanning Technology Co.,Ltd					
					0-6	0.03	0.05	0.05	0.10	0.15	0.20	DRAWN BY HUBERY 2017.04.08		SCALE 比例		WEIGHT 重量(g)		PERSPECTIVE 视角方法	
					6-18	0.05	0.08	0.10	0.15	0.20	0.25								
					18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY HNW 2017.04.08							
					30-50	0.10	0.15	0.20	0.25	0.30	0.50								
3	Insulator绝缘体	PTFE铁氟龙		1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY		ITEM NO品号	SHM.020.051		PART DESCRIPTION品名	MMCX-50KE-14	
2	Inner conductor中心针	BeCu镀铜	Gold plated镀金	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80								
1	Body外壳	Brass黄铜	Gold plated镀金	1	120-180	0.25	0.35	0.50	0.65	0.80	0.95								
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量	180-250	0.35	0.50	0.65	0.95	0.95	1.15								
						5		6				7		8		9		10	