


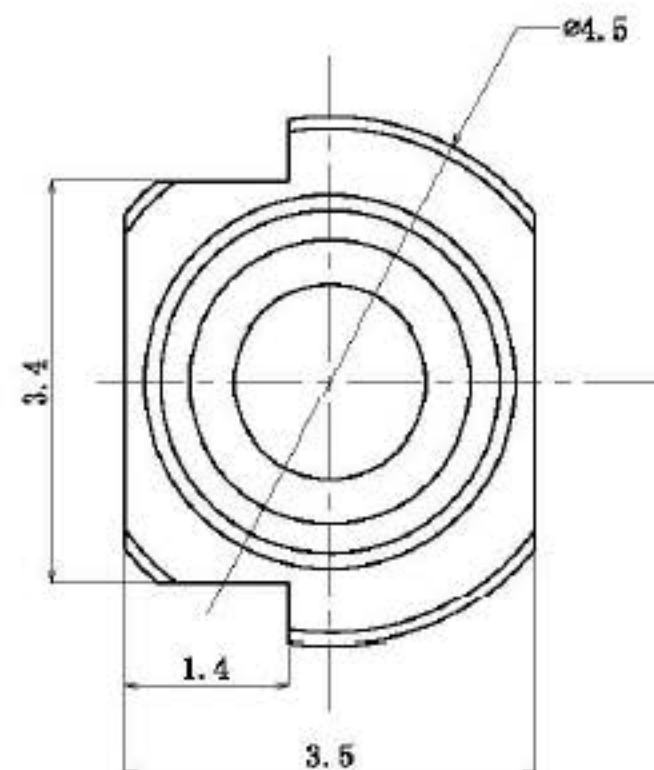
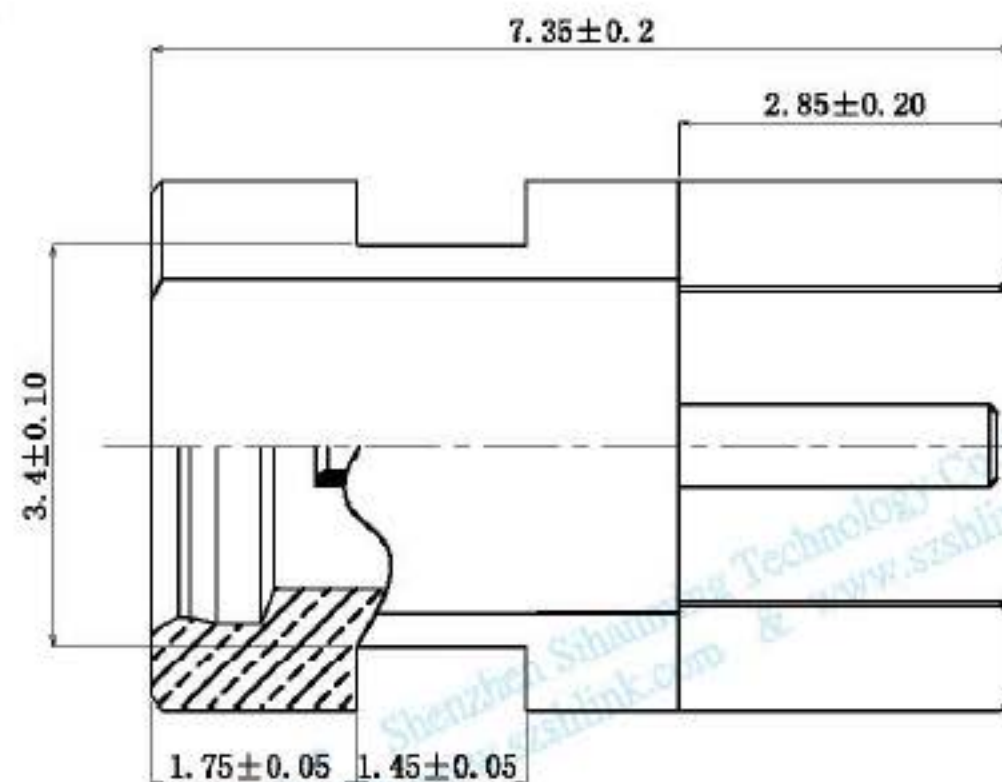


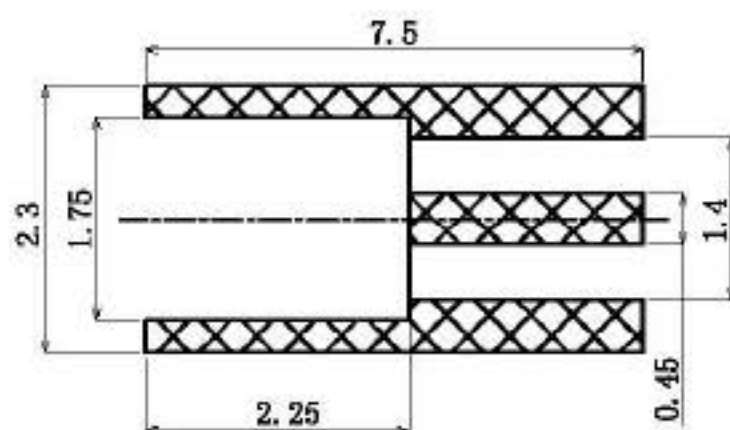

1. 表面镀金20 μ ;
2. 盐雾测试48小时;
3. 插拔力要求: 8~25N;
4. 温度范围: -55~+155 $^{\circ}$ C;
5. 工作电压: 170V r.m.s at sea level
6. 耐压: 500V r.m.s at sea level
7. 接触电阻: 外导体: $\leq 5\text{ m}\Omega$ 内导体: $\leq 5\text{ m}\Omega$
8. 绝缘电阻: $\geq 1000\text{ M}\Omega$
9. 耐用性: ≥ 500 次

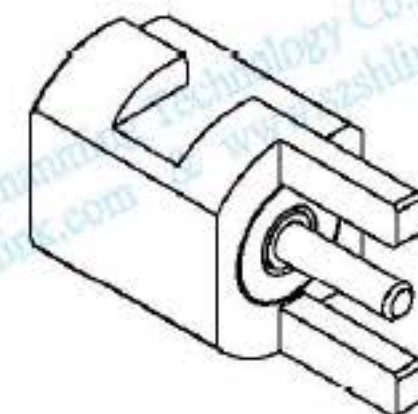

吸塑盒100PCS/套

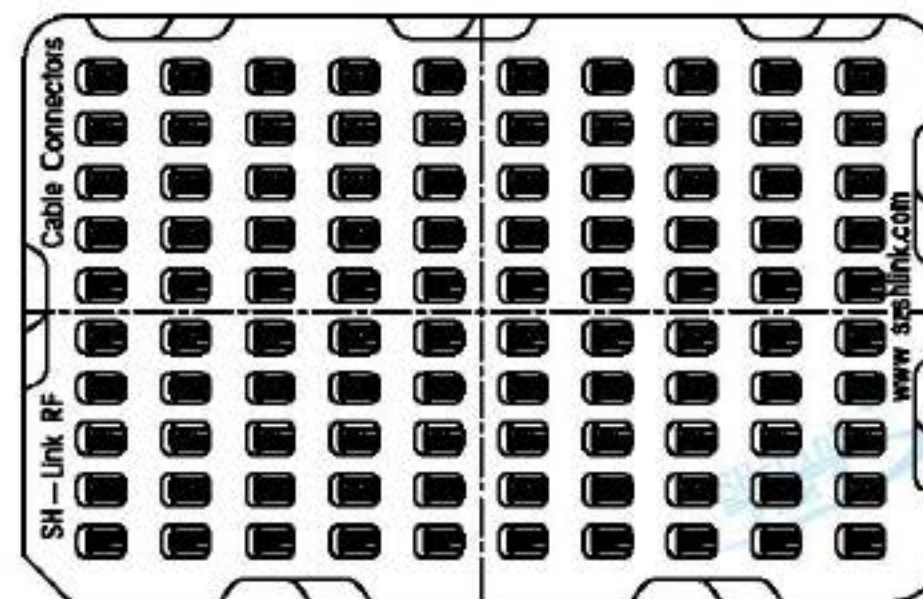

					Limits	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link [®] 深圳市思翰铭科技有限公司 RF 射频 Shenzhen Sihanning Technology Co.,Ltd			
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY 伍远航 2017.07.04		SCALE 比例	WEIGHT 重量(g)	PERSPECTIVE 视角方法	
					6-18	0.05	0.08	0.10	0.15	0.20	0.25						
					18-30	0.08	0.10	0.15	0.20	0.25	0.35						
					30-50	0.10	0.15	0.20	0.25	0.30	0.50	CHECKED BY					
3	Insulator绝缘体	PTFE铁氟龙		1	50-80	0.15	0.20	0.25	0.35	0.50	0.65						
2	Inner conductor中心针	BeCu铍铜	Gold plated镀金2U"	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80	APPROVED BY		ITEM NO品号	PART DESCRIPTION品名		
1	Body外壳	Brass黄铜	Gold plated镀金2U"	1	120-180	0.25	0.35	0.50	0.65	0.80	0.95						
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量	180-250	0.35	0.50	0.65	0.85	0.95	1.15			SHM. 020. 058	MMCX-50KE-8		
1		2	3	4	5			6			7		8		9		10