
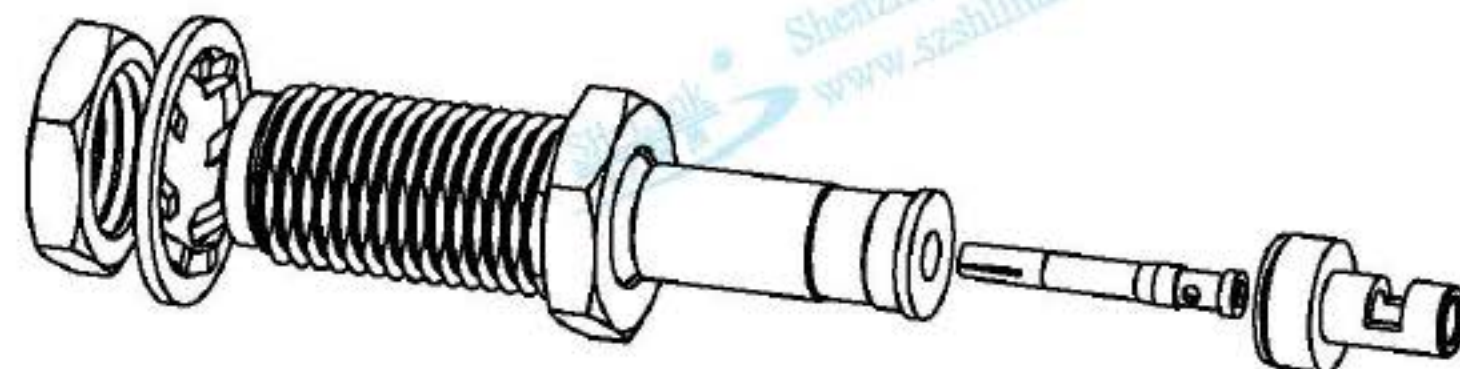
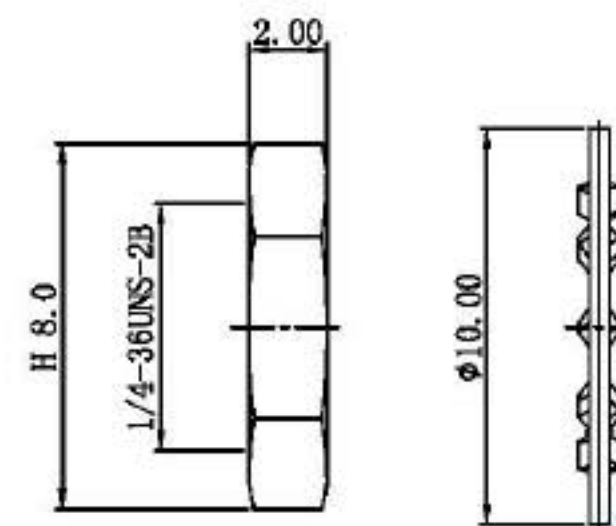
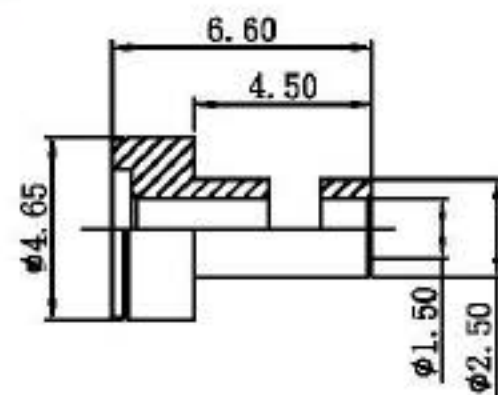


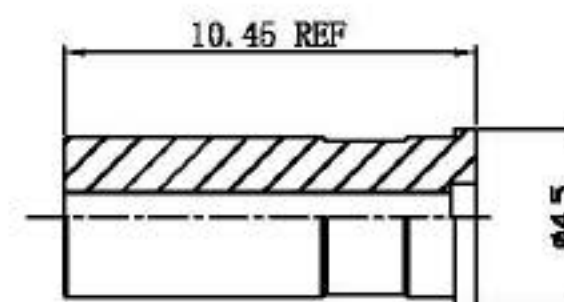

					Limits unit:mm	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link [®] 深圳市思翰铭科技有限公司 RF 射频 Shenzhen Sihanming Technology Co.,Ltd			
6	Washer 齿垫	Phosphor bronze磷铜	gold plated镀金	1	0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY 胡宇伟	2016.10.27	SCALE 比例 1:1	WEIGHT 重量(g)	PERSPECTIVE 视角方法	
5	Nut 螺母	brass 黄铜	gold plated镀金	1	6-18	0.05	0.08	0.10	0.15	0.20	0.25						
4	Rear cover后盖	brass 黄铜	gold plated镀金	1	18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY		ITEM NO品号		PART DESCRIPTION品名	
3	inner conductor中心针	BeCu 铍铜	gold plated镀金	1	30-50	0.10	0.15	0.20	0.25	0.30	0.50						
2	insulator绝缘体	PTFE 铁氟龙		1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY		SHM. 030. 097		SMA-C-K0. 9-5	
1	body壳体	brass 黄铜	gold plated镀金	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80						
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION(规格)	QTY数量	120-180	0.25	0.35	0.50	0.65	0.80	0.95						
	1	2	3	4	5	6	7	8	9	10							