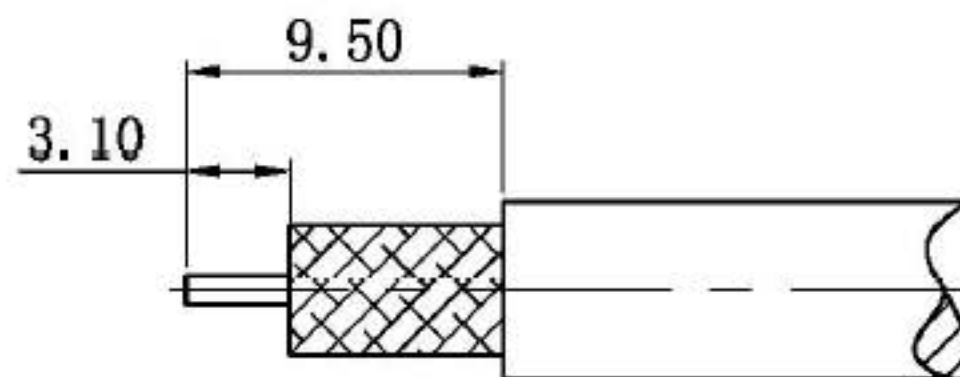


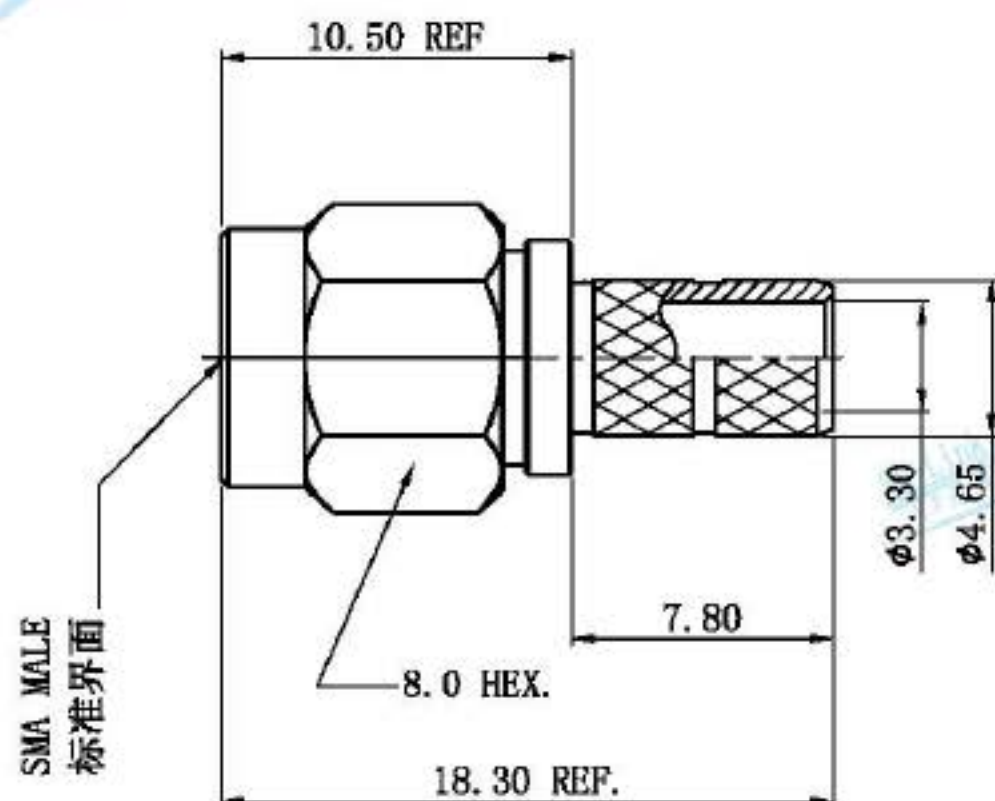
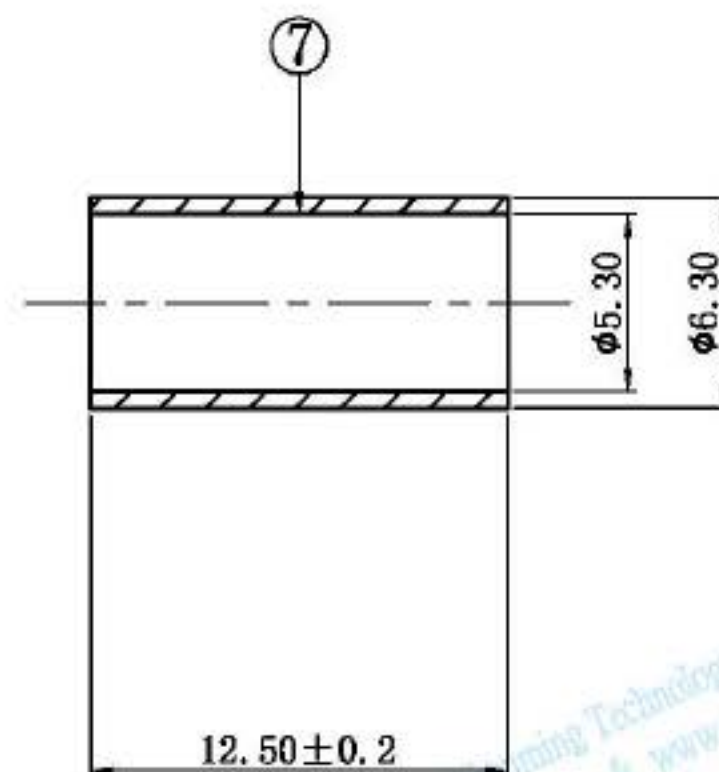
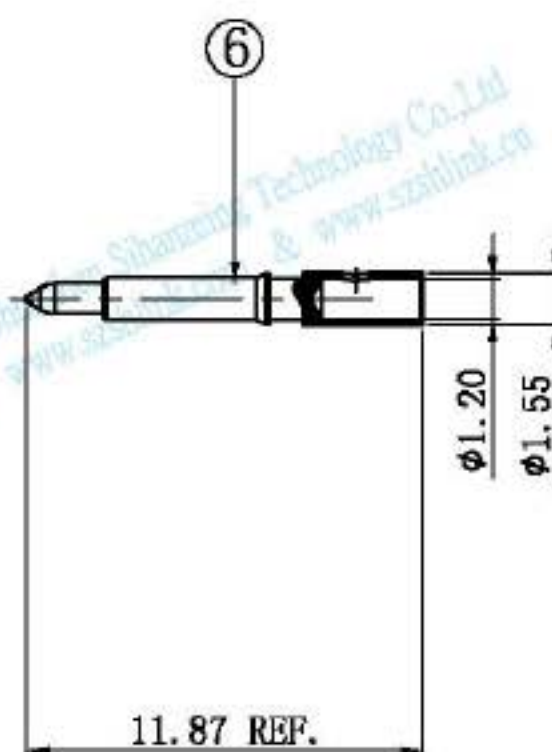
RoHS Assembly Drawing

外观图

NO Change Date Change No. Change content Change person version



建议剥线尺寸

SMA MALE
标准界面

适配线缆: RG58/LMR200

7	Ferrule 铜管	Brass 黄铜	NICKEL PLATED 镀镍	1	Limits unit: mm	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE	DATE作成日期	SH-Link®	深圳市思翰铭科技有限公司
6	Inner conductor中心针	Brass 黄铜	GOLD PLATED 镀金	1	0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY	伍远航	RF 射频	Shenzhen Siharming Technology Co., Ltd
5	Body主体	Brass 黄铜	GOLD PLATED 镀金	1	6-18	0.05	0.08	0.10	0.15	0.20	0.25	CHECKED BY	2018.06.28	SCALE	1:1
4	Insulator绝缘体	PIPE 铁弗龙		1	18-30	0.08	0.10	0.15	0.20	0.25	0.35	WEIGHT		PERSPECTIVE	
3	Spring washer弹簧圈	Beryllium copper铍铜		1	30-50	0.10	0.15	0.20	0.25	0.30	0.50	重量(g)		视角方法	
2	Washer 胶垫	Silica gel 硅胶	RED	1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	ITEM NO品号		PART DESCRIPTION品名	
1	Nut 螺帽	Steel 不锈钢	passivation钝化	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80	SHM. 030. 130		SMA-C-J3-1	
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量	120-180	0.25	0.35	0.50	0.65	0.80	0.95				
					180-250	0.35	0.50	0.65	0.95	0.95	1.15				