



RoHS Outline Drawing

NO	Change Date	Change No.	Change content	Change person	version

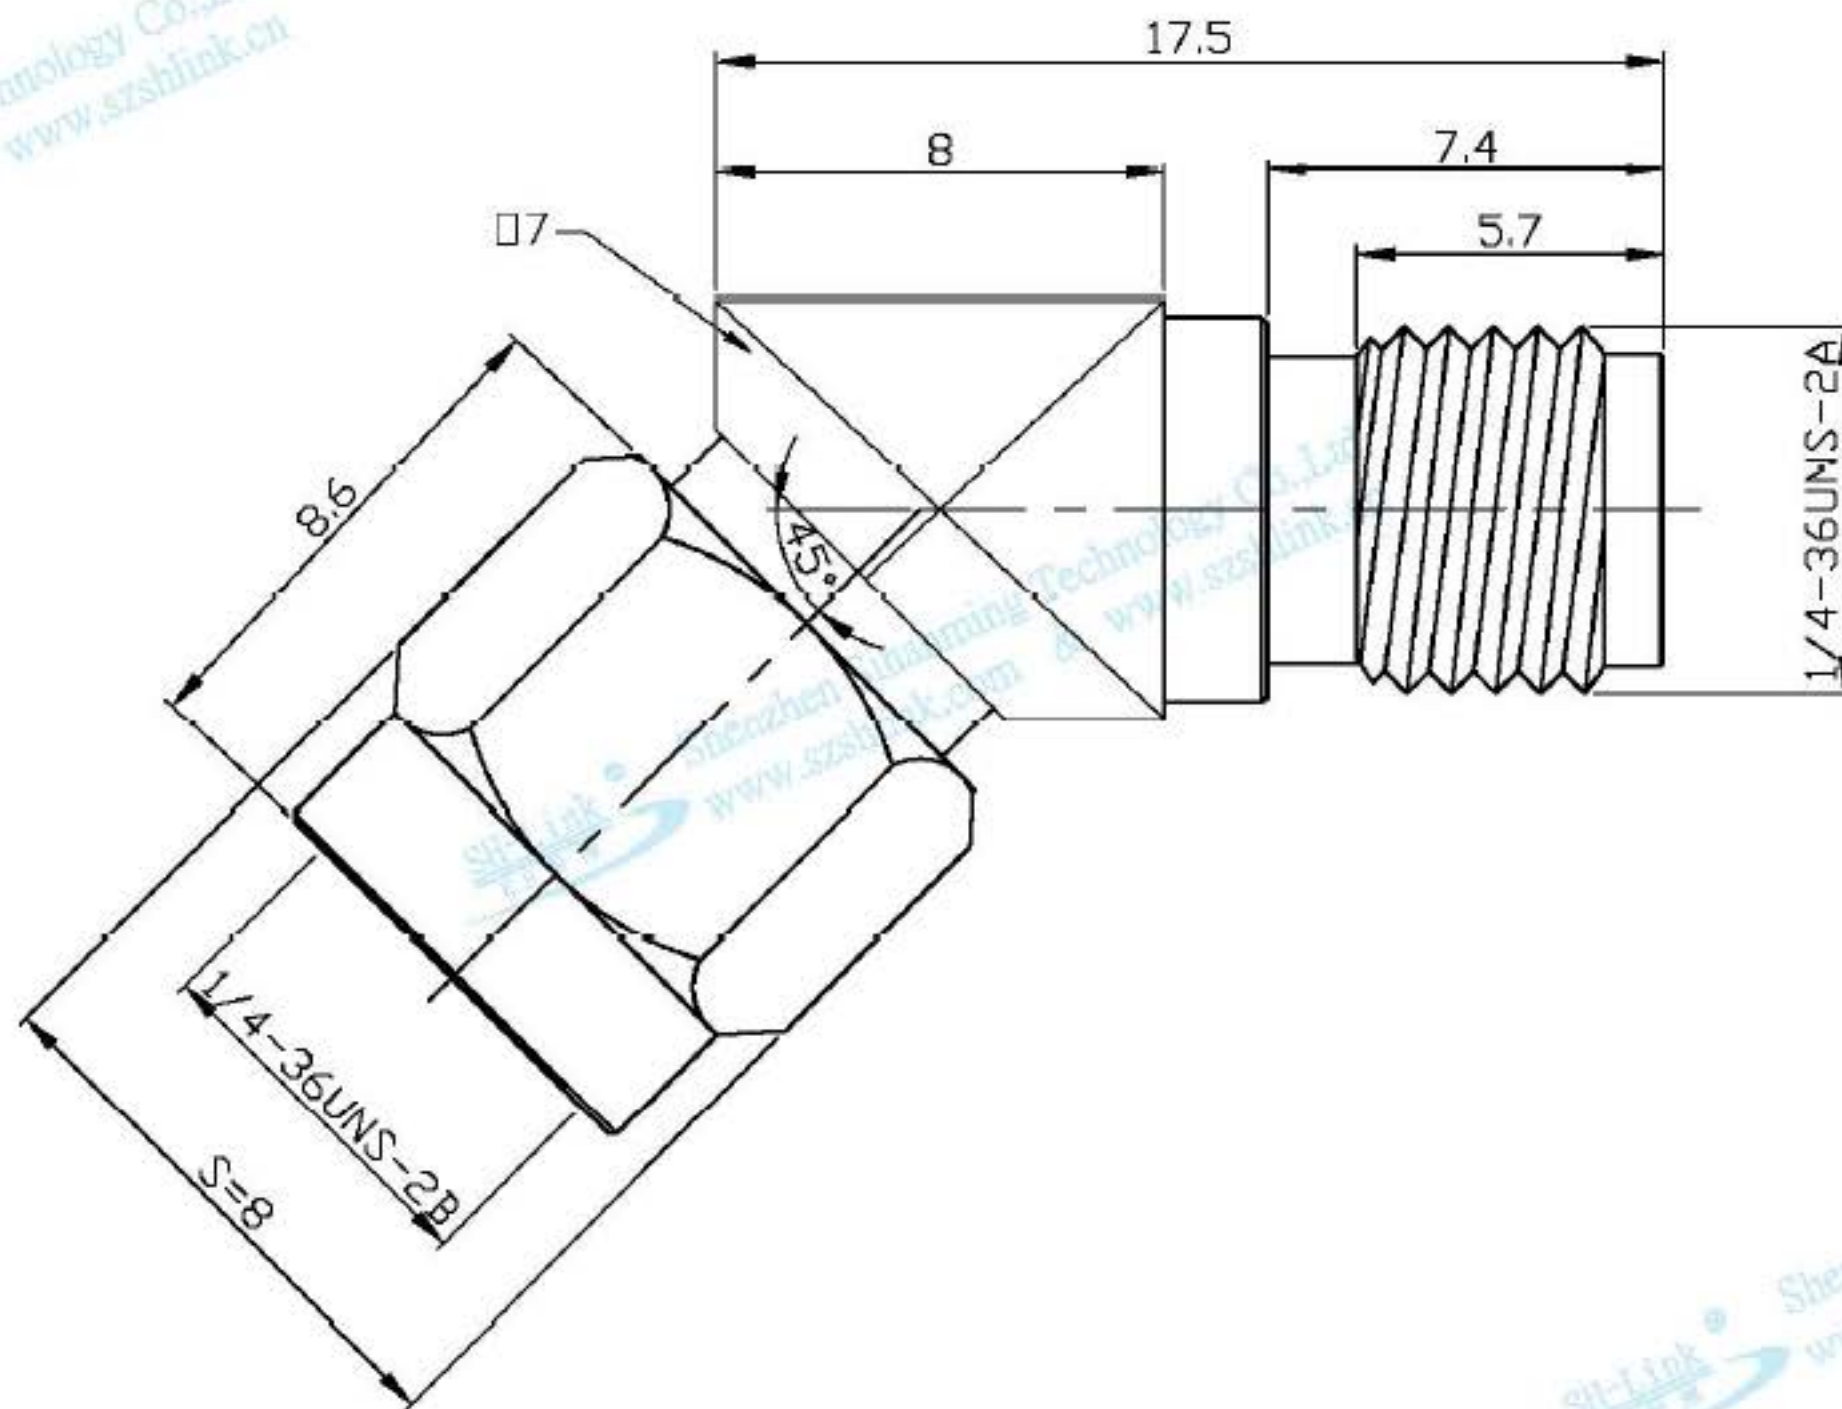

要求:

1. 产品镀金;
2. SMA母端螺纹套上红色保护帽;

7					Limits	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link® RF 射频			深圳市思翰铭科技有限公司 Shenzhen Sihanning Technology Co.,Ltd							
6	Spring washer弹簧圈	Beryllium copper铍铜		1	0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY	肖仕伟 2016.07.13	SCALE 比例		WEIGHT 重量(g)		PERSPECTIVE 视角方法						
5	Washer 胶垫	Silica gel 硅胶		1	6-18	0.05	0.08	0.10	0.15	0.20	0.25													
4	Nut 螺母	Brass 黄铜	GOLD PLATED 镀金	1	18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY						ITEM NO品号	PART DESCRIPTION品名					
3	Insulator绝缘体	PTFE 铁弗龙		1	30-50	0.10	0.15	0.20	0.25	0.30	0.50													
2	Inner conductor中心针	Beryllium copper铍铜	GOLD PLATED 镀金	1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY						SHM. 200.067	SMA-50JK-45°					
1	Body壳体	Brass 黄铜	GOLD PLATED 镀金	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80													
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量	120-180	0.25	0.35	0.50	0.65	0.80	0.95													
					180-250	0.35	0.50	0.65	0.95	0.95	1.15													
					1		2		3		4		5		6		7		8		9		10	