
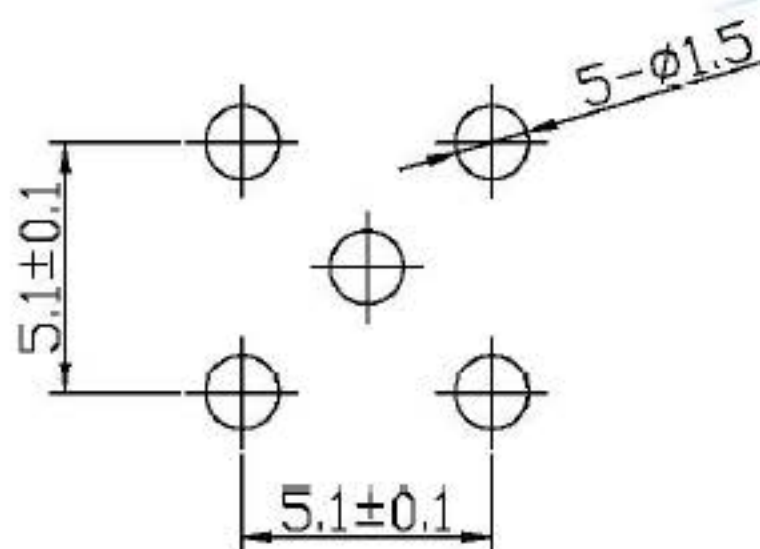


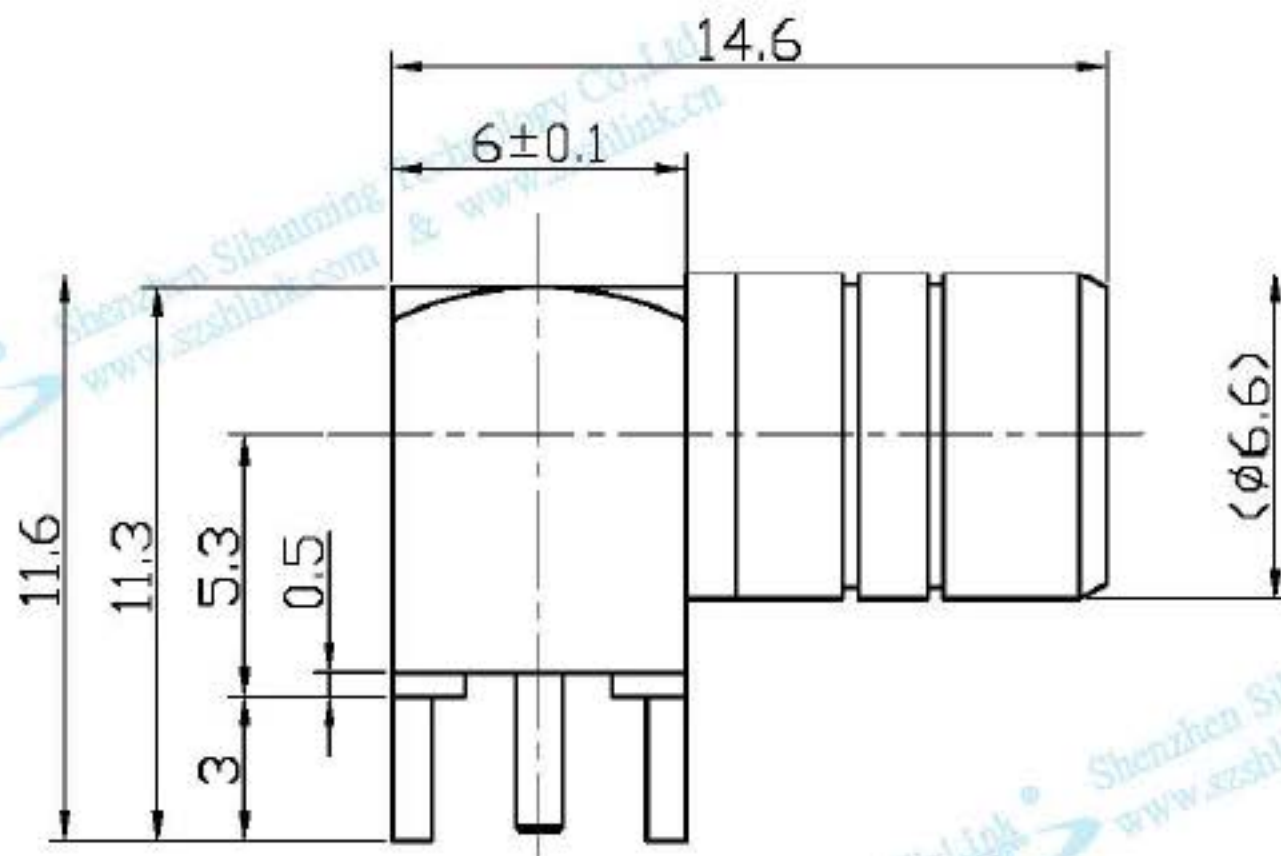

PCB建议安装板

A、电气性能:

- 特性阻抗: 50 Ω
- 频率范围: DC-3GHz
- 工作电压: 335V
- 接触电阻: 内导体: ≤6m Ω; 外导体 ≤1m Ω
- 绝缘电阻: ≥1000 M Ω
- 介质耐压: 1000V

B、机械特性:

- 内导体分离力: ≥0.3N
- 机械寿命: 500次 (每分钟12次)

				Limits unit:mm	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link [®] RF 射频		深圳市思翰铭科技有限公司 Shenzhen Sihaming Technology Co.,Ltd				
				0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY	胡宇伟 2016.09.06	SCALE 比例	1:1	WEIGHT 重量(g)	PERSPECTIVE 视角方法			
				6-18	0.05	0.08	0.10	0.15	0.20	0.25									
				18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY								
				30-50	0.10	0.15	0.20	0.25	0.30	0.50									
				50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY								
				80-120	0.20	0.25	0.30	0.50	0.65	0.80									
				120-180	0.25	0.35	0.50	0.65	0.80	0.95			ITEM NO品号	PART DESCRIPTION品名					
				180-250	0.35	0.50	0.65	0.85	0.95	1.15									
3	inner conductor中心针	bronze 青铜	gold plated镀金 1u"	1															
2	insulator绝缘体	PTFE 铁氟龙		1															
1	body壳体	brass 黄铜	gold plated镀金 1u"	1															
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION(规格)	QTY数量									SH3. 650. 304新		SMB-50TKWE新				
1		2		3		4		5		6		7		8		9		10	