


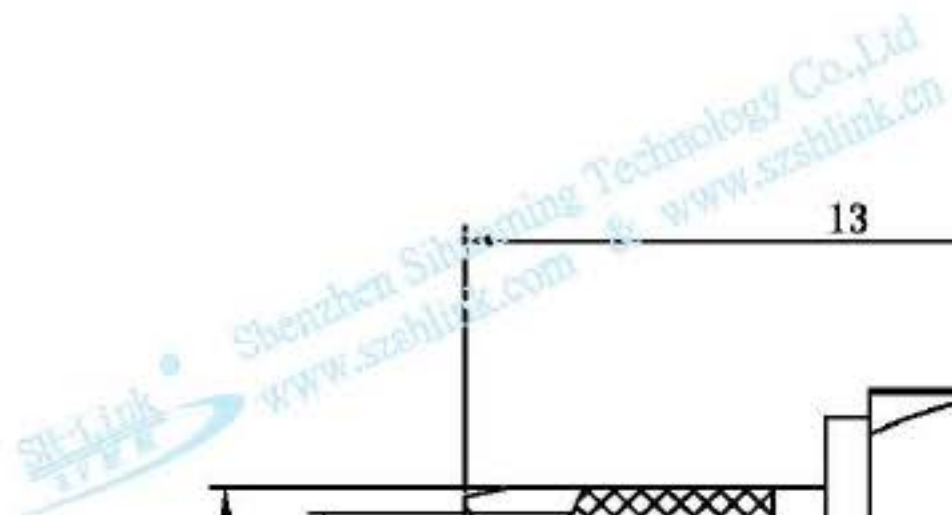

适配线缆: SFF-50-1.5-1, RG-174, RG-316

					Limits unit:mm	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link [®] 深圳市思翰铭科技有限公司 RF 射频 Shenzhen Sihanming Technology Co.,Ltd				
4	Copper pipe铜管	Brass黄铜	Gold plated 镀金	1	0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY 伍远航	2016.07.04	SCALE 比例	1:1	WEIGHT 重量(g)	PERSPECTIVE 视角方法	
3	Insulator绝缘体	PCM		1	6-18	0.05	0.08	0.10	0.15	0.20	0.25							
2	后盖	Brass黄铜	Gold plated 镀金	1	18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY		ITEM NO品号				
1	Pin contact中心针	Brass黄铜	Gold plated 镀金	1	30-50	0.10	0.15	0.20	0.25	0.30	0.50							
	Insulator绝缘体	PTFE聚四氟乙烯		1	50-80	0.15	0.20	0.25	0.35	0.50	0.85	APPROVED BY		SH3.650.031	SMB-C-KW1.5			
		Body壳体	Brass黄铜	Gold plated 镀金	1	80-120	0.20	0.25	0.30	0.50	0.65					0.80		
NO	DESCRIPTION 描述	MATERIAL 材质	SPECIFICATION 规格	QTY数量	120-180	0.25	0.35	0.50	0.65	0.80	0.95							
	1	2	3	4		180-250	0.35	0.50	0.65	0.95	1.15							
	1	2	3	4		5				6			7		8		9	10