

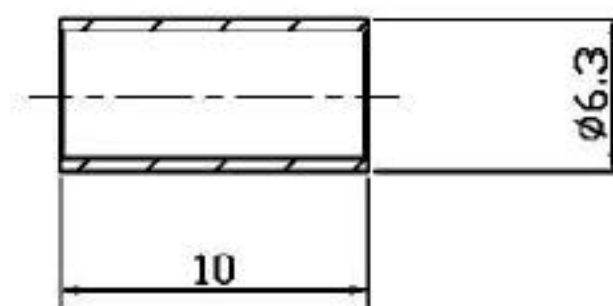
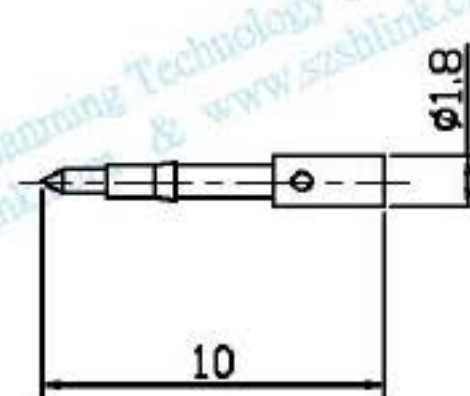


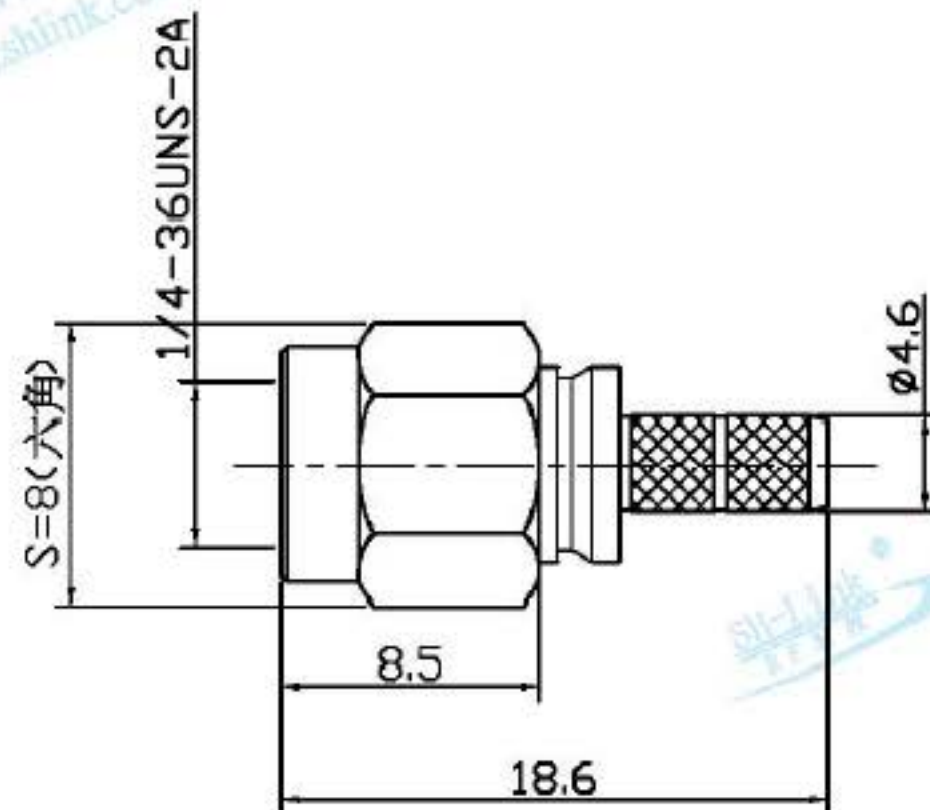

要求:

1. 产品镀金;
2. 包装:端口装上保护帽, 2PCS/PE袋;
3. 用于RG58线缆。

建议剥线尺寸



					Limits unit:mm	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link® RF 射频				深圳市思翰铭科技有限公司 Shenzhen Sihanming Technology Co.,Ltd	
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY	肖仕伟 2016.08.01	SCALE 比例	WEIGHT 重量(g)	PERSPECTIVE 视角方法	ITEM NO品号	PART DESCRIPTION品名	
					6-18	0.05	0.08	0.10	0.15	0.20	0.25								
4	Copper pipe 铜管	Brass 黄铜	NICKEL PLATED 镀镍	1	18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY							
3	Inner conductor中心针	Brass 黄铜	GOLD PLATED 镀金	1	30-50	0.10	0.15	0.20	0.25	0.30	0.50								
2	Insulator绝缘体	PIFE 铁弗龙		1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY							
1	BODY 壳体	Brass 黄铜	GOLD PLATED 镀金	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80								
NO	DESCRIPTION 描述	MATERIAL 材质	SPECIFICATION 规格	QTY数量	120-180	0.25	0.35	0.50	0.65	0.80	0.95								
					180-250	0.35	0.50	0.65	0.95	0.95	1.15								
1		2		3		4		5		6		7		8		9		10	