


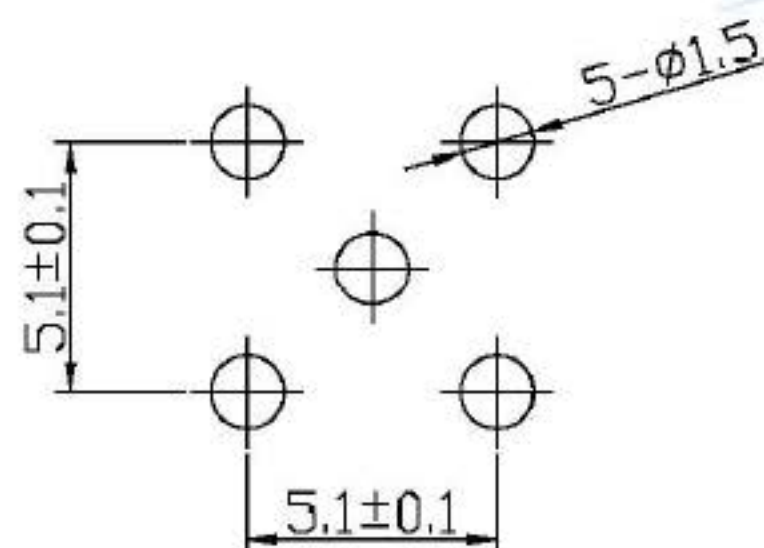


A、电气性能:

- 1.特性阻抗: 50 Ω
- 2.频率范围: DC-3GHz
- 3.工作电压: 335V
- 4.接触电阻: 内导体: $\leq 6\text{m}\Omega$; 外导体 $\leq 1\text{m}\Omega$
- 5.绝缘电阻: $\geq 1000\text{ M}\Omega$
- 6.介质耐压: 1000V

B、机械特性：

1. 内导体分离力: $\geq 0.3\text{N}$
2. 机械寿命: 500次 (每分钟12次)

						Limits unit:mm		A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link® RF 射频				深圳市思翰铭科技有限公司 Shenzhen Sihanning Technology Co.,Ltd	
						0-6		0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY 胡宇伟 2016.09.06		SCALE 比例	1:1	WEIGHT 重量(g)	PERSPECTIVE 视角方法		
						6-18		0.05	0.08	0.10	0.15	0.20	0.25								
						18-30		0.08	0.10	0.15	0.20	0.25	0.35								
						30-50		0.10	0.15	0.20	0.25	0.30	0.50	CHECKED BY							
						50-80		0.15	0.20	0.25	0.35	0.50	0.65								
						80-120		0.20	0.25	0.30	0.50	0.65	0.80								
						120-180		0.25	0.35	0.50	0.65	0.80	0.95	APPROVED BY							
						180-250		0.35	0.50	0.65	0.85	0.95	1.15								