
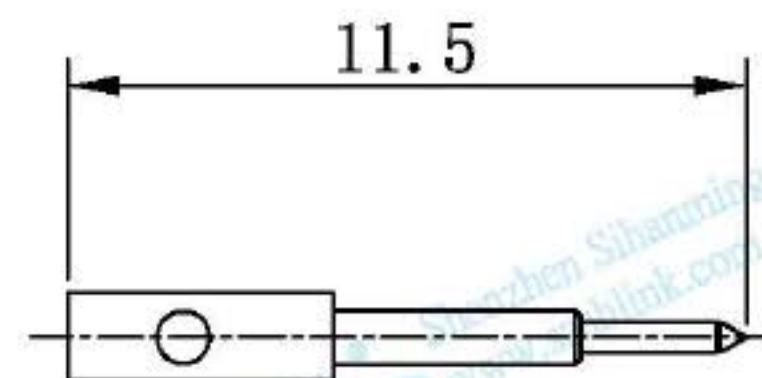


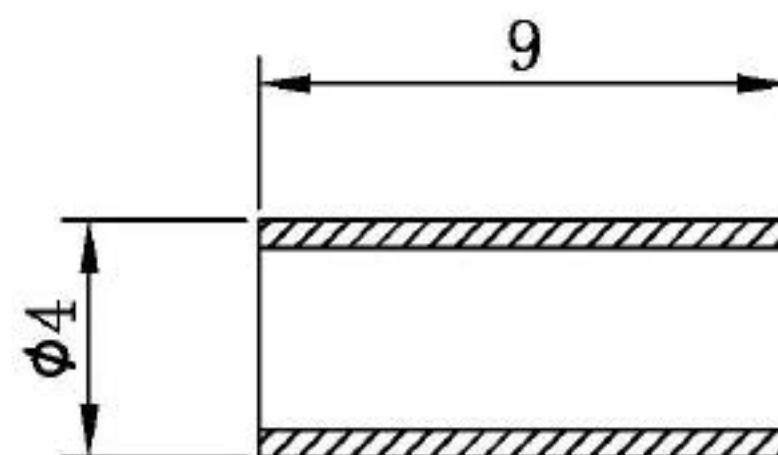

- 1.特性阻抗: 50Ω
- 2.频率范围: DC-3GHz
- 3.工作电压: 335V
- 4.接触电阻: 内导体: ≤6mΩ; 外导体 ≤1mΩ
- 5.绝缘电阻: ≥1000 mΩ
- 6.介质耐压: 1000V

1. 机械寿命: 500次 (每分钟12次)

					Limits unit:mm	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link [®] 深圳市思翰铭科技有限公司 RF 射频 Shenzhen Sihanning Technology Co.,Ltd					
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY 胡宇伟	2017.12.29	SCALE 比例	1:1	WEIGHT 重量(g)	PERSPECTIVE 视角方法		
					6-18	0.05	0.08	0.10	0.15	0.20	0.25								
2	Copper pipe铜管	Brass黄铜	Gold plated 镀金	1	18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY		ITEM NO品号	PART DESCRIPTION品名				
1	Pin contact中心针	Brass黄铜	Gold plated 镀金	1	30-50	0.10	0.15	0.20	0.25	0.30	0.50								
	Insulator绝缘体	PTFE聚四氟乙烯		1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY		SH3.660.786	SMB-C-ZJ1.5-1				
	Body壳体	Brass黄铜	Gold plated 镀金	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80								
					120-180	0.25	0.35	0.50	0.65	0.80	0.95								
NO	DESCRIPTION 描述	MATERIAL 材质	SPECIFICATION 规格	QTY数量	180-250	0.35	0.50	0.65	0.95	0.95	1.15								
					1	2	3	4	5	6	7	8		9		10			