
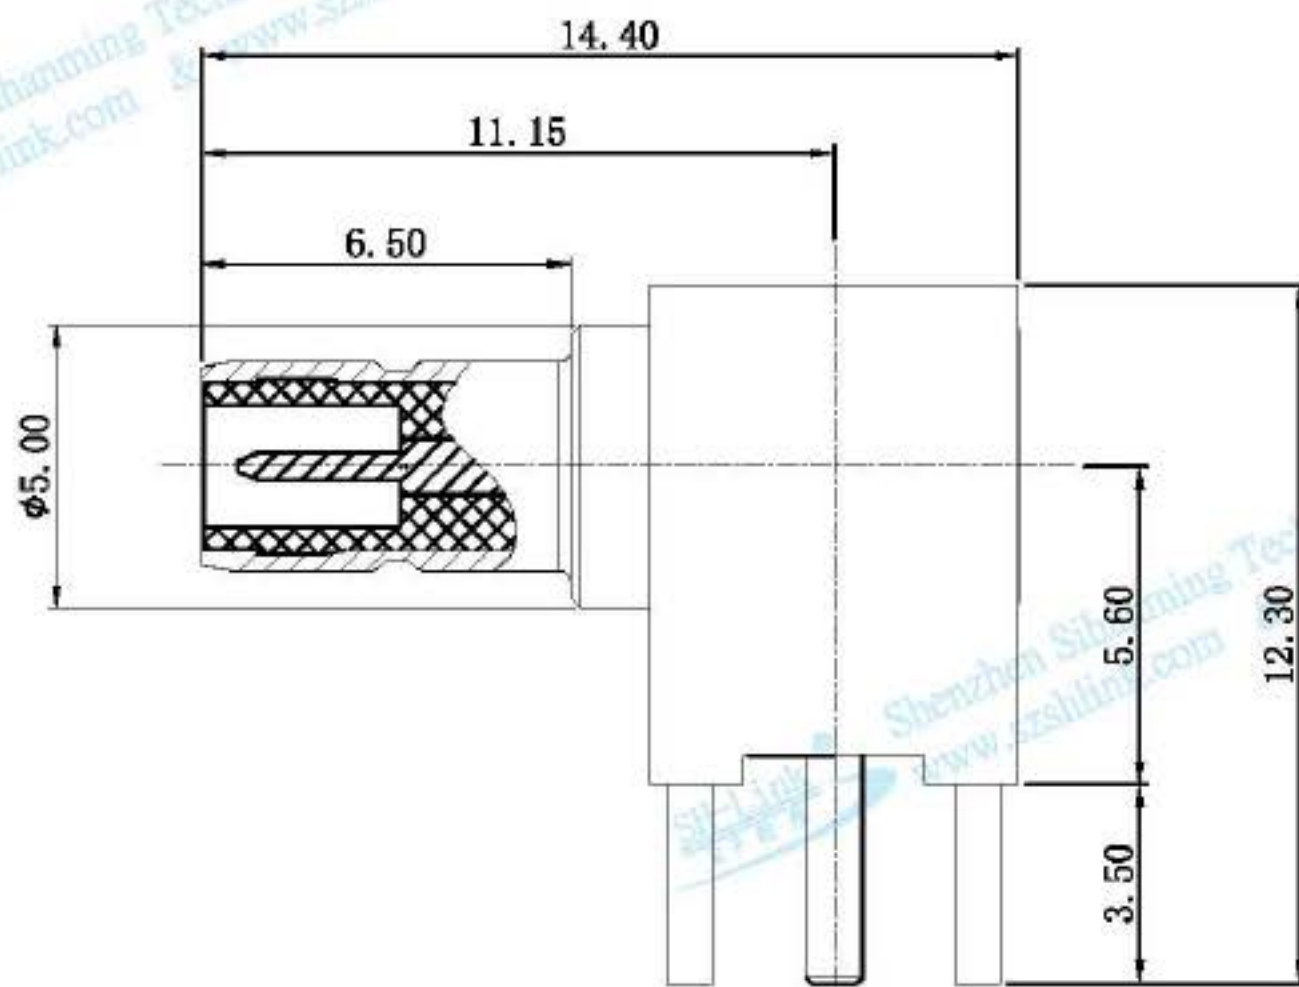
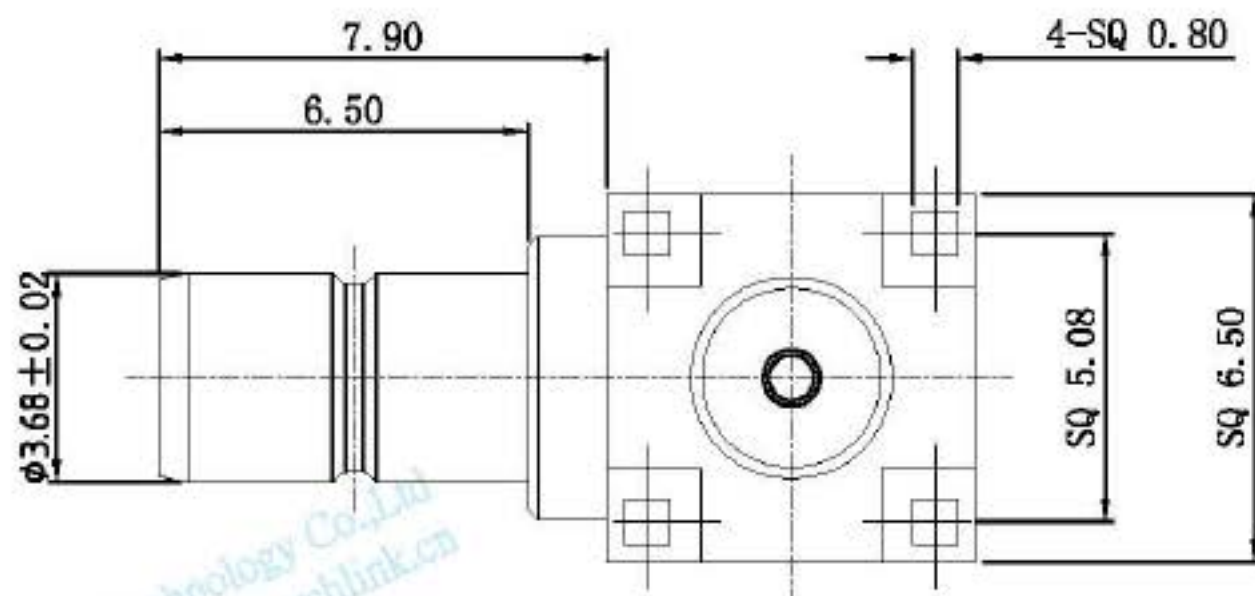
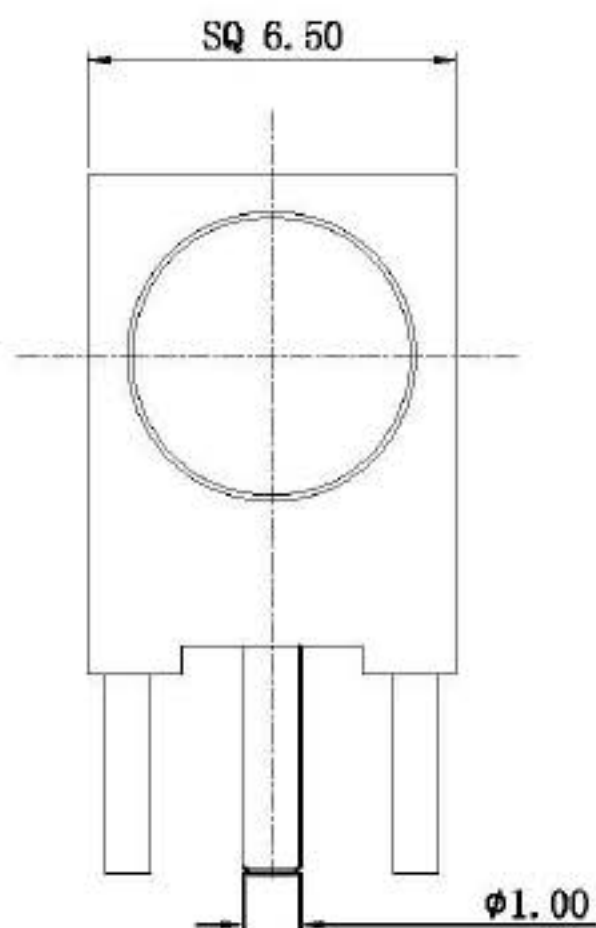




					Limits unit:mm	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link® RF 射频				深圳市思翰铭科技有限公司 Shenzhen Sihanning Technology Co.,Ltd	
6	Cover后塞	Brass黄铜	Gold plated镀金	1	0-6	0.03	0.05	0.08	0.15	0.15	0.20	DRAWN BY 胡宁伟	2018. 12. 15	SCALE 比例	1:1	WEIGHT 重量(g)	PERSPECTIVE 视角方法		
4	Insulator绝缘体	PTFE铁氟龙		1	6-18	0.05	0.08	0.10	0.15	0.20	0.25								
4	Insulator绝缘体	PTFE铁氟龙		1	18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY		ITEM NO品号		PART DESCRIPTION品名			
3	Inner conductor中心针	Brass黄铜	Gold plated镀金	1	30-50	0.10	0.15	0.20	0.25	0.30	0.50								
2	Inner conductor中心针	BeCu铍铜	Gold plated镀金	1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY		SHM. 040. 098		SMB-50JWE-22			
1	Body外壳	Brass黄铜	Gold plated镀金	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80								
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量	120-180	0.25	0.35	0.50	0.65	0.80	0.95								
					180-250	0.35	0.50	0.65	0.85	0.95	1.15								
					1	2	3	4	5	6	7	8	9	10					