



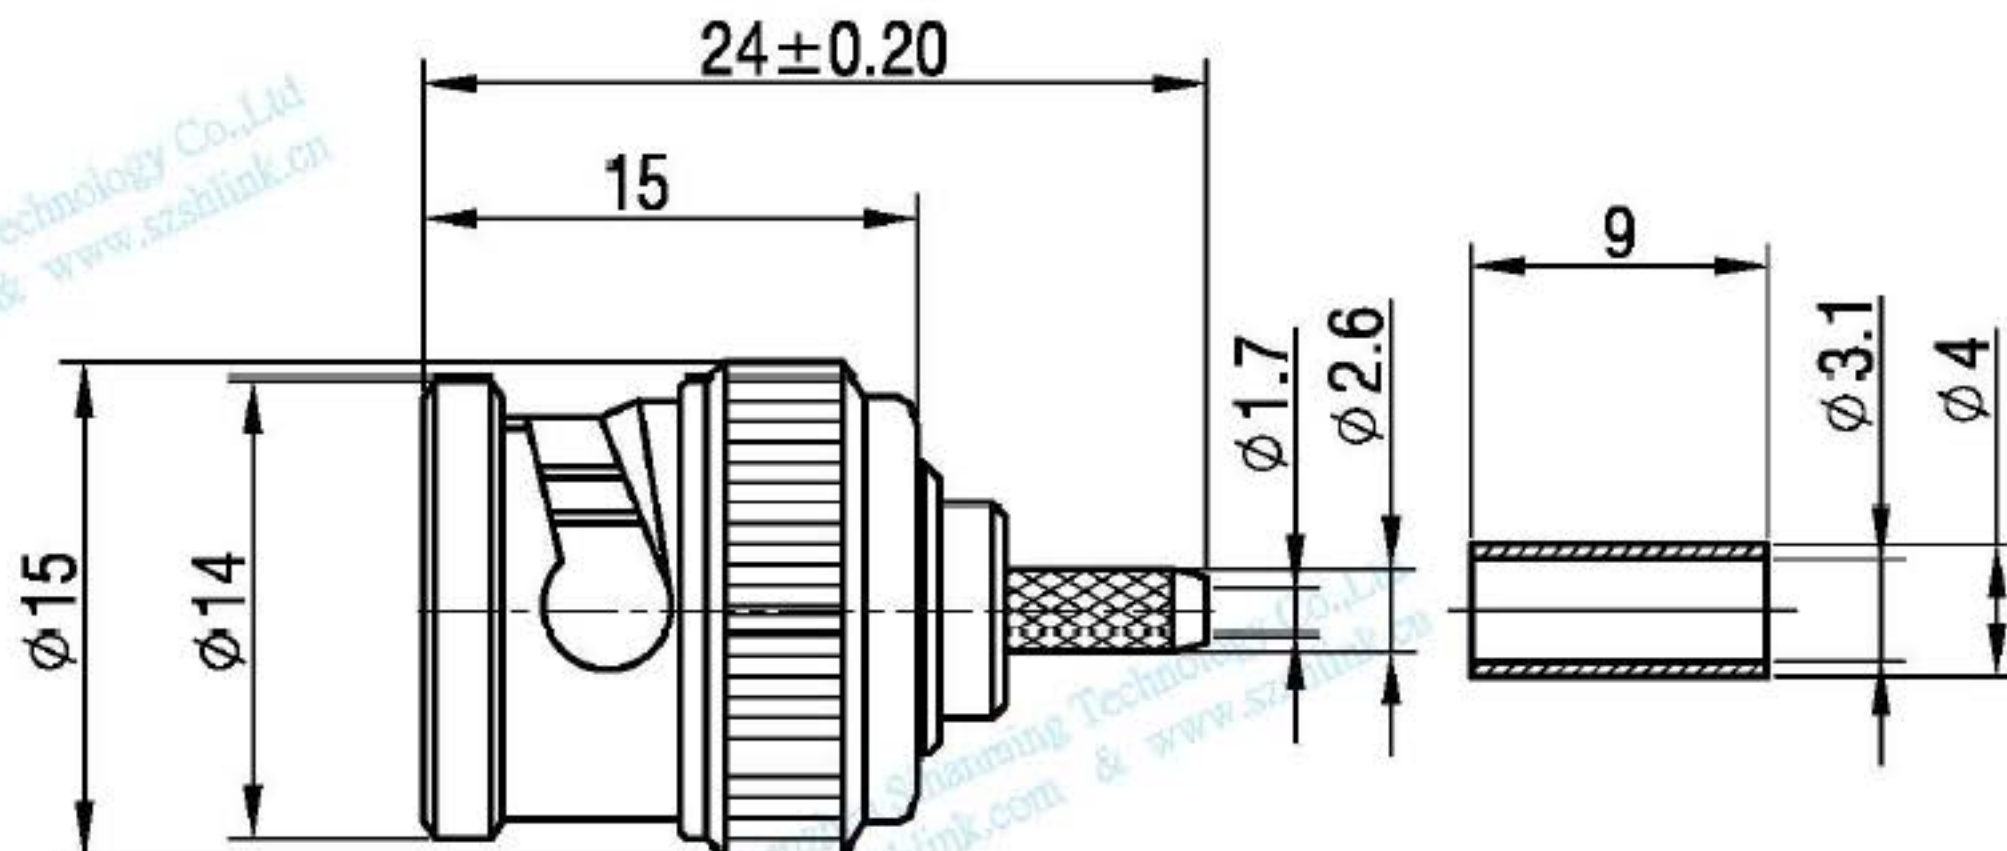

技术要求 Technical parameters:

- 特性阻抗 Impedance: 75Ω ;
- 频率范围 Frequency Range: DC-1GHz;
- 工作电压 Rated working voltage: 500V;
- 接触电阻 Contact resistance:
内导体 Center contact $\leq 1.5m\Omega$, 外导体 Outer Contact $\leq 1m\Omega$;
- 绝缘电阻 Insulation resistance: $\geq 5000M\Omega$;
- 介质耐压 Medium pressure: 1500V;
- 机械寿命 Mechanical life: >500 次 (每分钟12次 frequency 12 cycles/min);
- 适配线缆: SYV-75-2-1, RG-179, 1.5C-2V

包装方式: 塑料袋单元包装, 然后放入大袋内

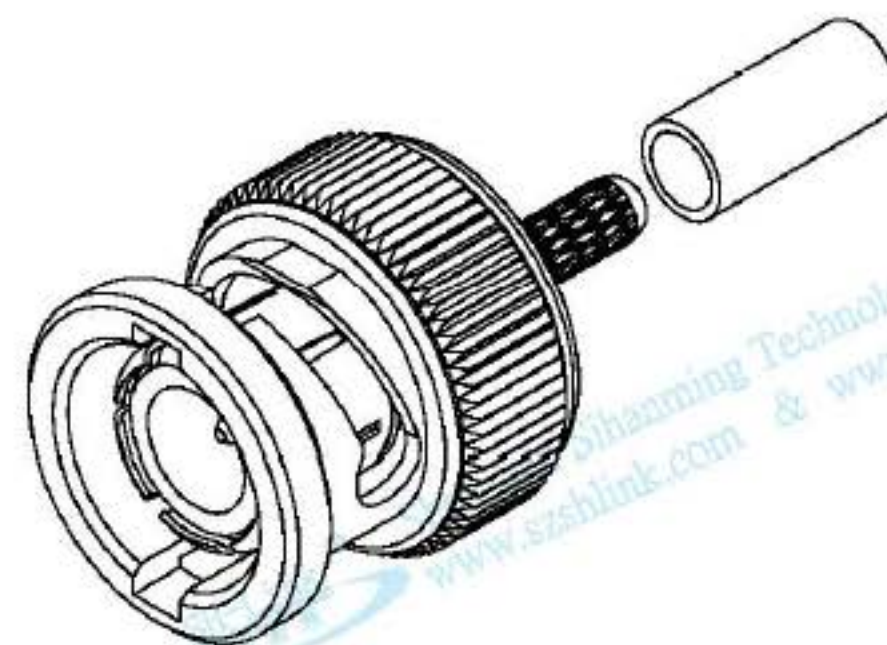

					Limits unit:mm	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link® RF 射频				深圳市思翰铭科技有限公司 Shenzhen Sihanming Technology Co.,Ltd	
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY	陈燕荣 2019.07.22	SCALE 比例		WEIGHT 重量(g)		PERSPECTIVE 视角方法	
					6-18	0.05	0.08	0.10	0.15	0.20	0.25								
4	铜管	Brass黄铜	nickel plated镀镍	1	18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY							
3	Insulation 绝缘体	聚四氟乙烯		1	30-50	0.10	0.15	0.20	0.25	0.30	0.50								
2	Pin contact 中心针	Brass黄铜	Gold plated 镀金	1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY							
1	Body外壳	Brass黄铜	nickel plated镀镍	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80								
NO	DESCRIPTION 描述	MATERIAL 材质	SPECIFICATION 规格	QTY数量	120-180	0.25	0.35	0.50	0.65	0.80	0.95								
					180-250	0.35	0.50	0.65	0.95	0.95	1.15			ITEM NO品号		PART DESCRIPTION品名			
												SH3. 650. 024		BNC-C-75J1.5					
1		2		3		4		5		6		7		8		9		10	