


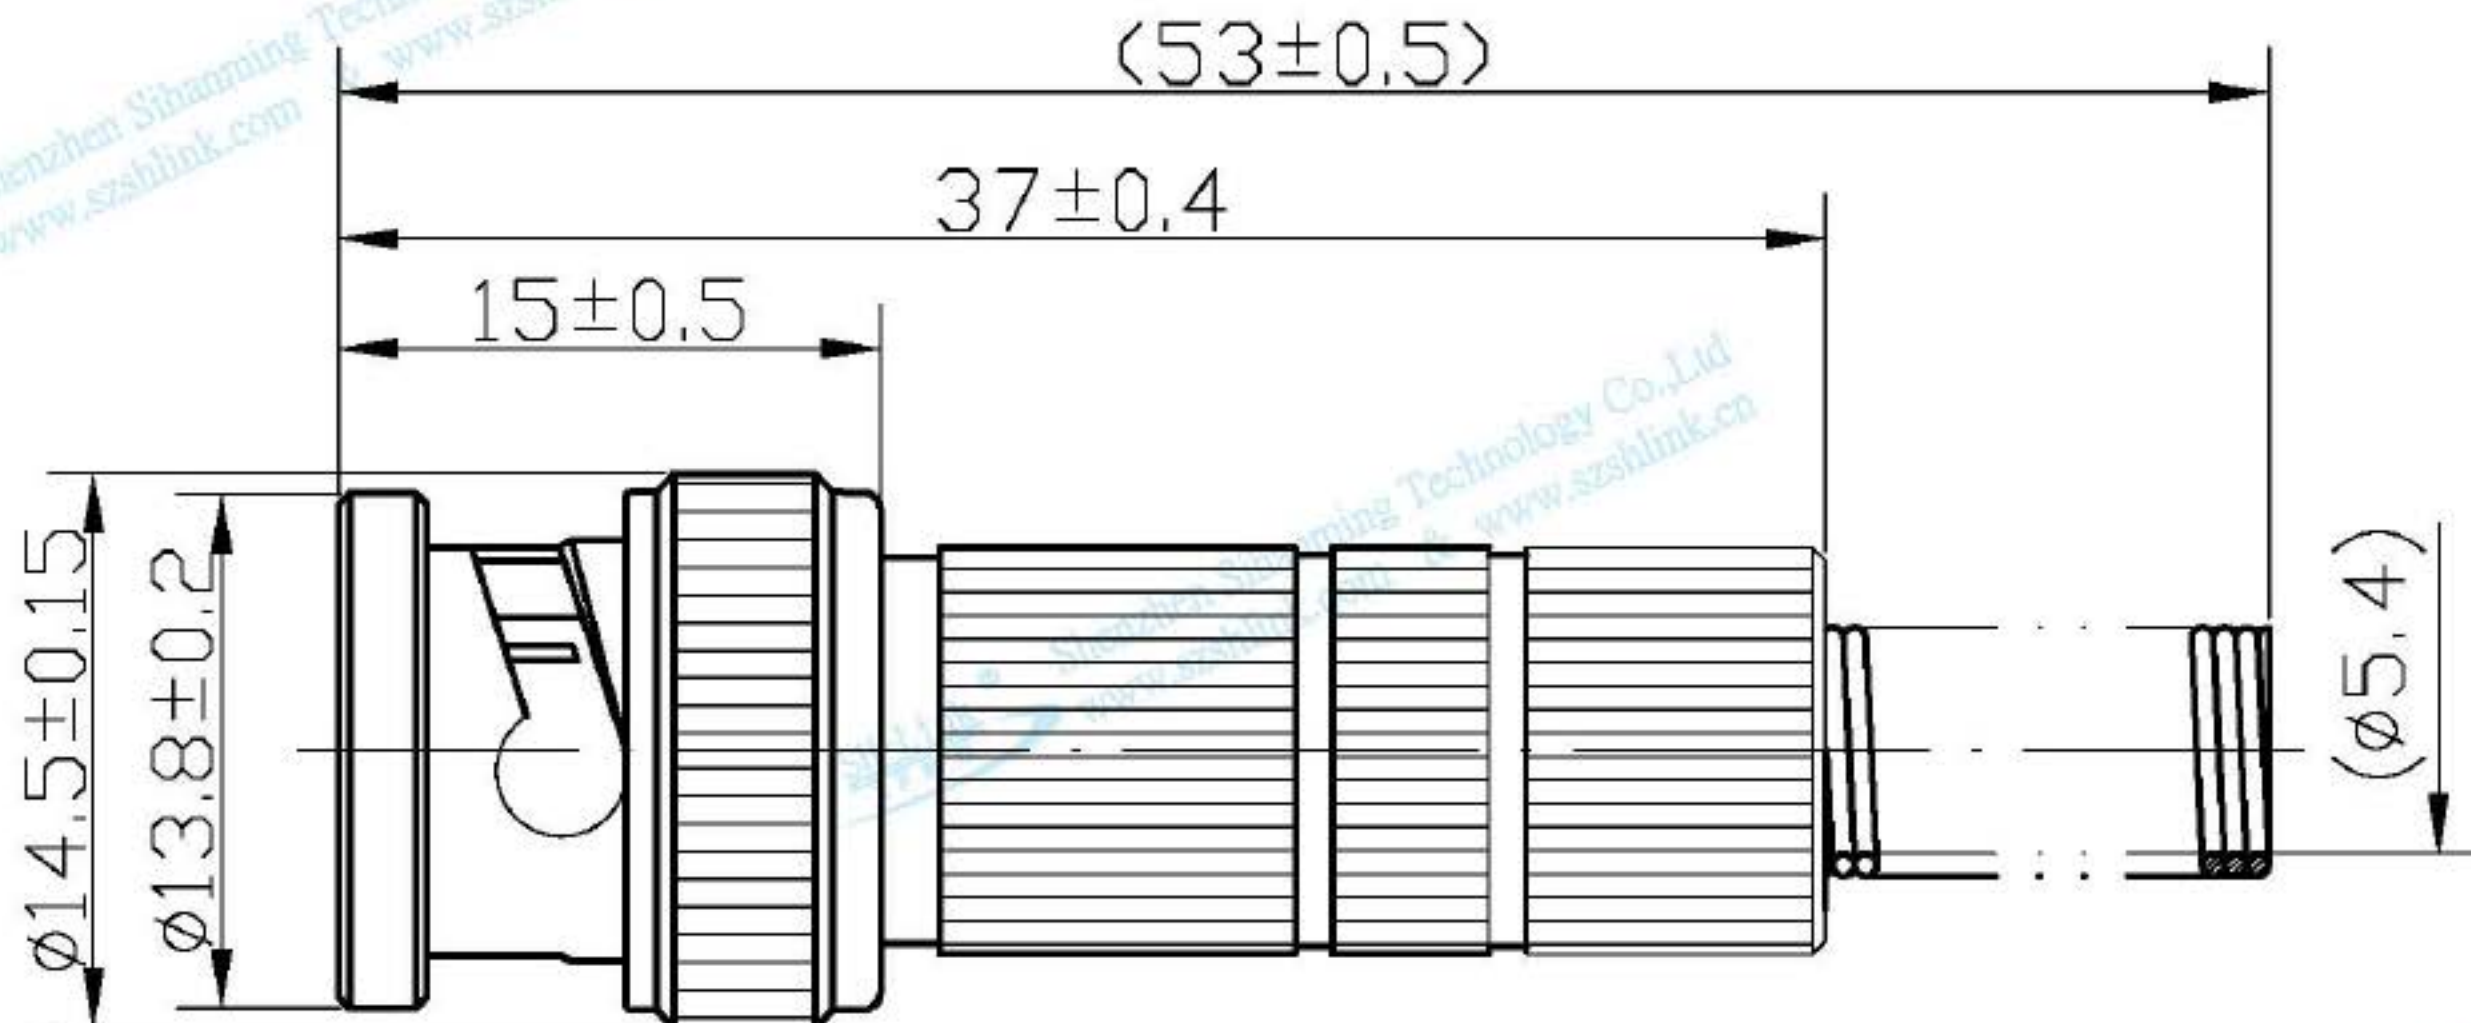

适配线缆: SYV50-3-1

					Limits unit:mm	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link® RF 射频		深圳市思翰铭科技有限公司 Shenzhen Sihanning Technology Co.,Ltd			
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY 胡宁伟	2016.06.17	SCALE 比例		WEIGHT 重量(g)		PERSPECTIVE 视角方法	
					6-18	0.05	0.08	0.10	0.15	0.20	0.25								
					18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY							
3	绝缘体	PS		1	30-50	0.10	0.15	0.20	0.25	0.30	0.50								
2	内导体	黄铜	镀银	1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY		ITEM NO品号		PART DESCRIPTION品名			
1	外导体	黄铜	镀镍	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80			SH3, 650, 2083		BNC-JS-3A			
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量	120-180	0.25	0.35	0.50	0.65	0.80	0.95								
					180-250	0.35	0.50	0.65	0.95	0.95	1.15								
1		2		3		4		5		6		7		8		9		10	