

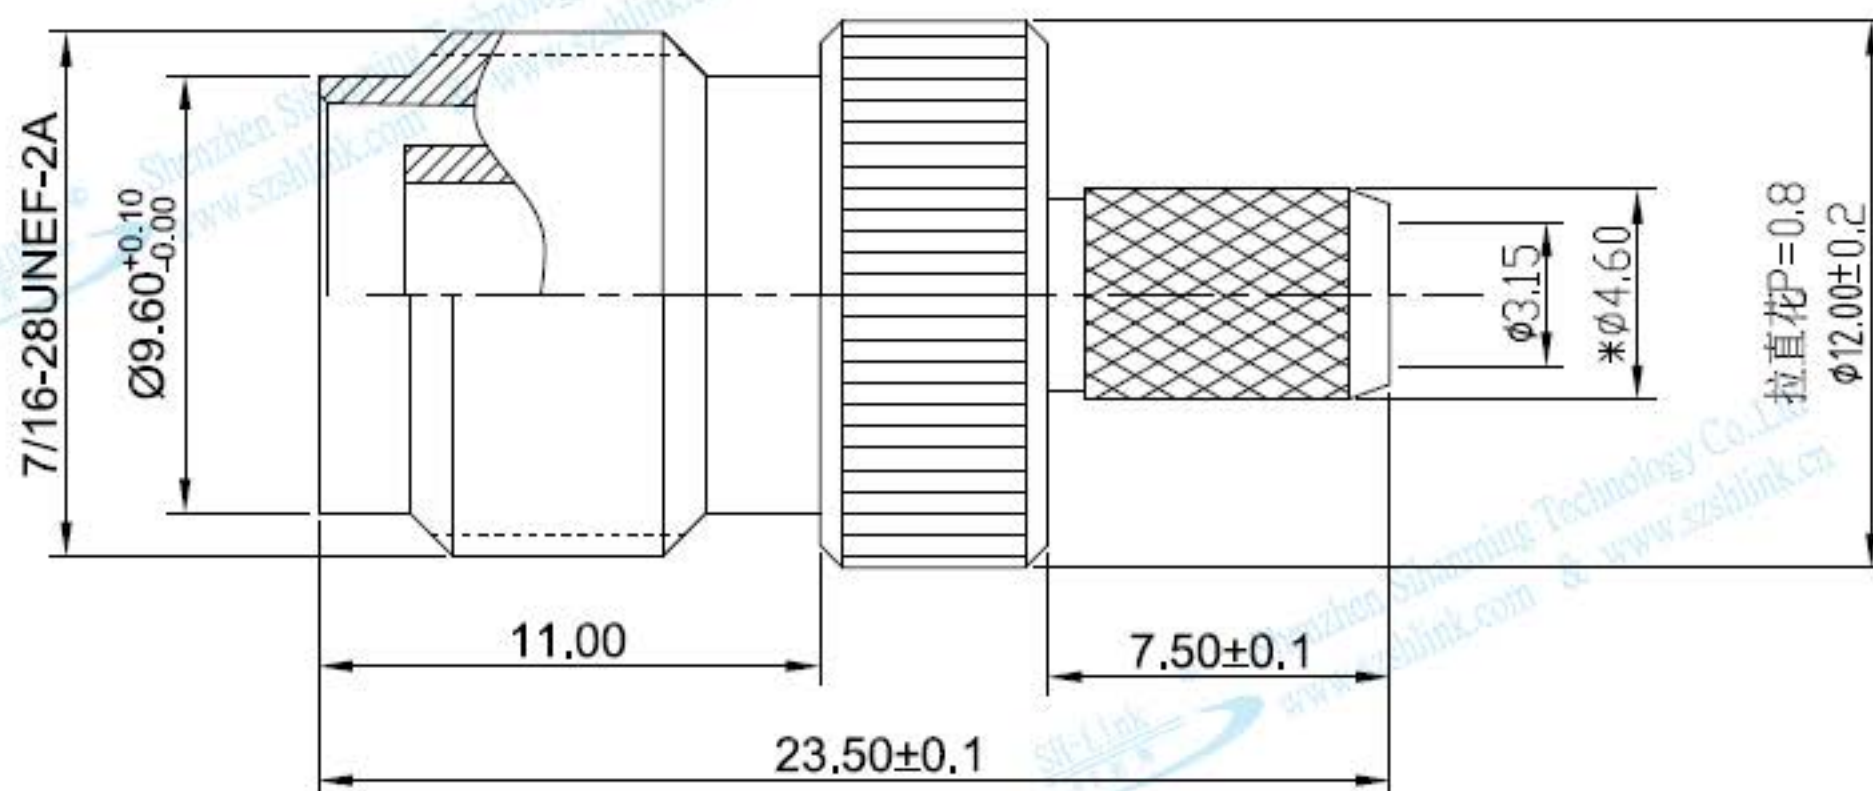


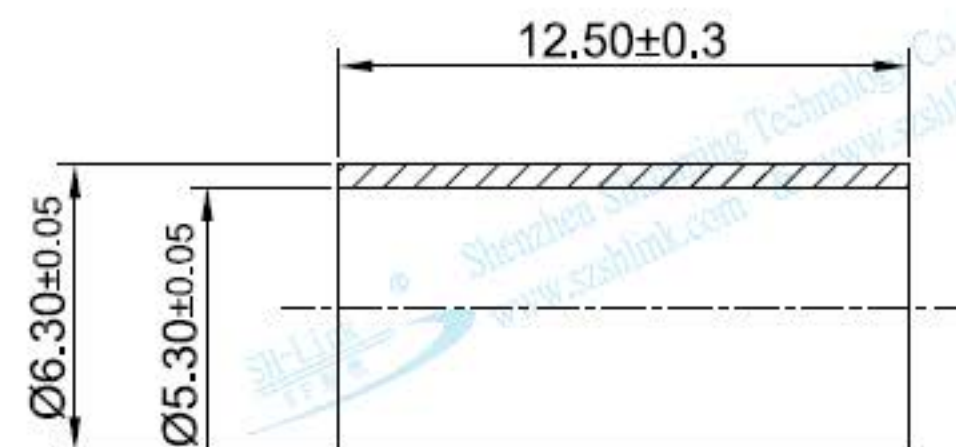

技术要求:

- 特性阻抗: 50Ω;
- 频率范围: DC-3GHz;
- 工作电压: 500V;
- 接触电阻: 内导体≤10mΩ, 外导体≤2.5mΩ
- 绝缘电阻: ≥5000MΩ;
- 介质耐压: 1500V;
- 内导体分离力: ≥0.57N
- 机械寿命: >500次 (每分钟12次)
- 压接钳口尺寸: 5.41mm
- 接RG58 CABLE



					Limits unit:mm	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link [®] 深圳市思翰铭科技有限公司 RF 射频 Shenzhen Siharming Technology Co.,Ltd					
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY HUBERY	2017.03.24	SCALE 比例	4:1	WEIGHT 重量(g)	PERSPECTIVE 视角方法		
					6-18	0.05	0.08	0.10	0.15	0.20	0.25								
4	copper sleeve铜管	brass 黄铜	nickel plated镀镍	1	18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY		ITEM NO品号	PART DESCRIPTION品名				
3	inner conductor中心针	brass 黄铜	gold plated镀金	1	30-50	0.10	0.15	0.20	0.25	0.30	0.50								
2	insulator绝缘体	PTFE 铁氟龙		1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY		SH3.650.311	TNC-C-K3				
1	body壳体	brass 黄铜	nickel plated镀镍	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80								
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION(规格)	QTY数量	120-180	0.25	0.35	0.50	0.65	0.80	0.95								
					180-250	0.35	0.50	0.65	0.95	0.95	1.15								
1		2		3		4		5		6		7		8		9		10	