
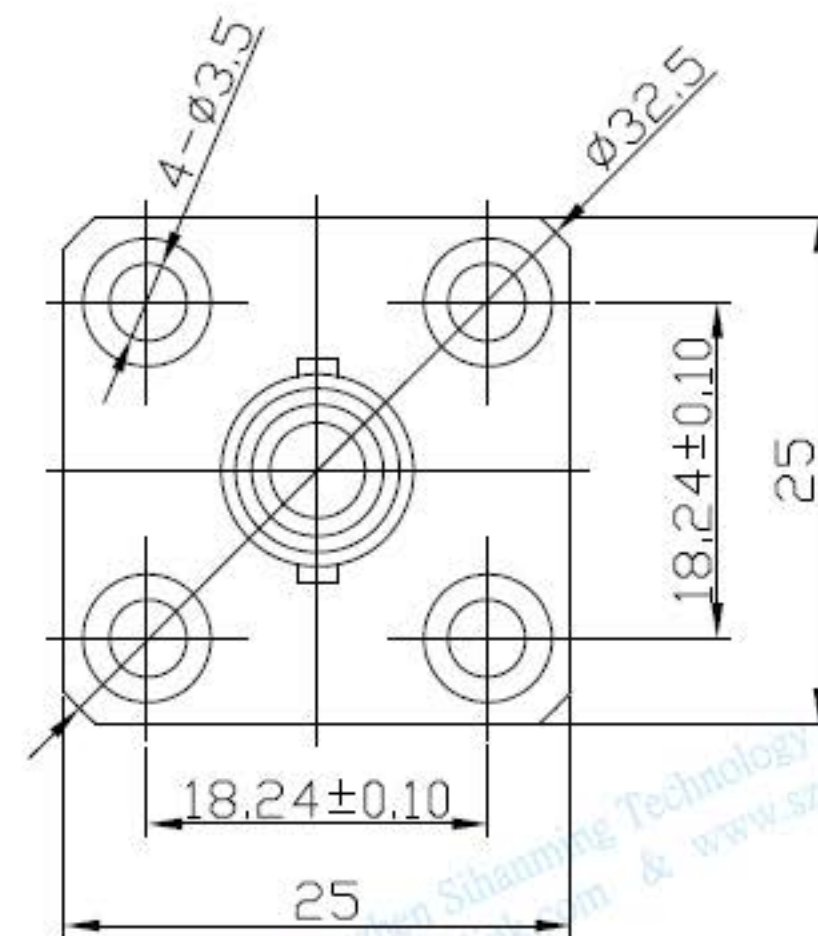




					Limits unit:mm	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link [®] 深圳市思翰铭科技有限公司 RF 射频 Shenzhen Sihanming Technology Co.,Ltd					
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY 胡宁伟 2016.05.05		SCALE 比例	1:1	WEIGHT 重量(g)		PERSPECTIVE 视角方法	
					6-18	0.05	0.08	0.10	0.15	0.20	0.25								
					18-30	0.08	0.10	0.15	0.20	0.25	0.35								
3	inner conductor中心针	Brass黄铜	gold plated镀金	1	30-50	0.10	0.15	0.20	0.25	0.30	0.50	CHECKED BY							
2	insulator绝缘体	PTFE 铁氟龙		1	50-80	0.15	0.20	0.25	0.35	0.50	0.65								
1	body壳体	brass 黄铜	nickel plated镀镍	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80	APPROVED BY		SH3.660.015					
					120-180	0.25	0.35	0.50	0.65	0.80	0.95								
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION(规格)	QTY数量	180-250	0.35	0.50	0.65	0.95	0.95	1.15								
1		2		3		4		5		6		7		8		9		10	