


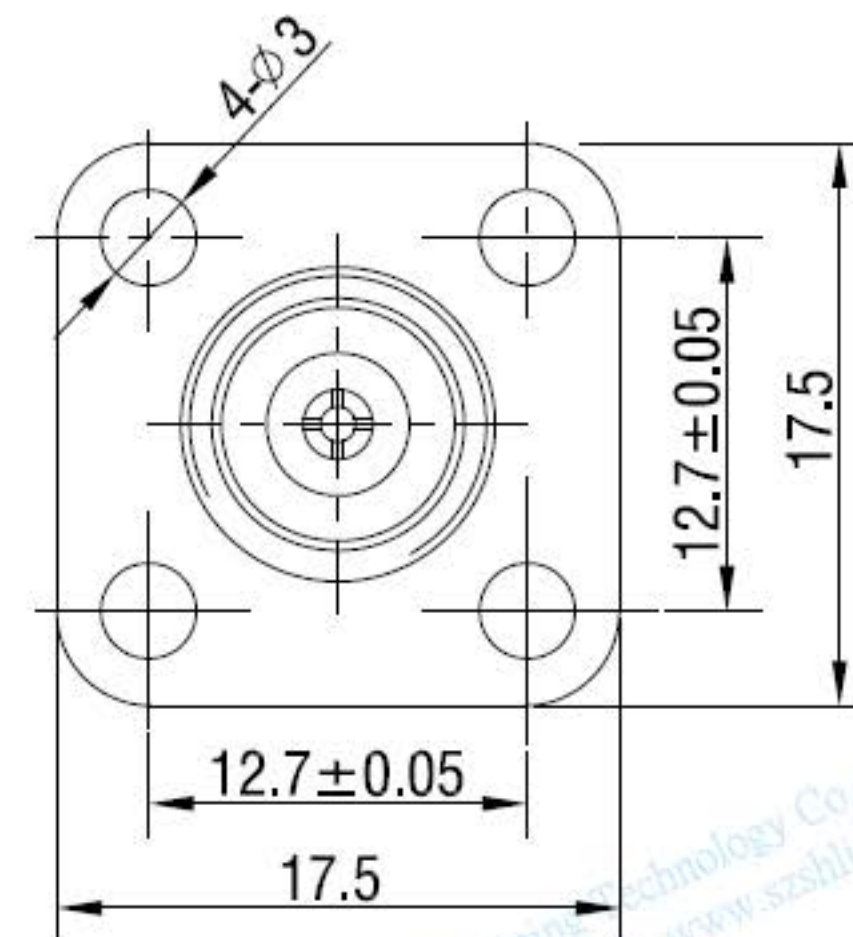

1. 特性阻抗Impedance: 50 Ω
2. 频带范围Frequency Range: DC-2GHz
3. 额定工作电压Rated working voltage: 500V
4. 接触电阻Contact resistance:
内导体Center contact $\leq 10\text{m}\Omega$; 外导体Outer Contact $\leq 2.5\text{m}\Omega$;
5. 绝缘电阻Insulation resistance: $\geq 5000\text{M}\Omega$
6. 介质耐压Medium pressure: 1500V
7. 内导体分离力Center Conductor retention force: $\geq 0.57\text{N}$
8. 机械寿命Mechanical life: ≥ 500 次 (每分钟12次frequency 12 cycles/MIN)

					Limits unit:mm	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link® RF 射频				深圳市思翰铭科技有限公司 Shenzhen Sihanming Technology Co.,Ltd	
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY	伍远航 2016. 11. 07	SCALE 比例	WEIGHT 重量(g)	PERSPECTIVE 视角方法			
					6-18	0.05	0.08	0.10	0.15	0.20	0.25								
4	Insulation 绝缘子	PTFE 聚四氟乙烯		1	18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY		ITEM NO品号	PART DESCRIPTION品名				
3	copper pipe 压接套	Brass 黄铜	Nickel plated 镀镍	1	30-50	0.10	0.15	0.20	0.25	0.30	0.50								
2	Body 外壳	Brass 黄铜	Nickel plated 镀镍	1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY		SH3. 660. 315	TNC-C-KF1. 5				
1	Inner conductor 插孔	Beryllium bronze 青铜	Gold plated 镀金	1	80-120	0.20	0.25	0.30	0.50	0.65	0.80								
NO	DESCRIPTION 描述	MATERIAL 材质	SPECIFICATION 规格	QTY数量	120-180	0.25	0.35	0.50	0.65	0.80	0.95								
					180-250	0.35	0.50	0.65	0.95	0.95	1.15								
1		2		3		4		5		6		7		8		9		10	