
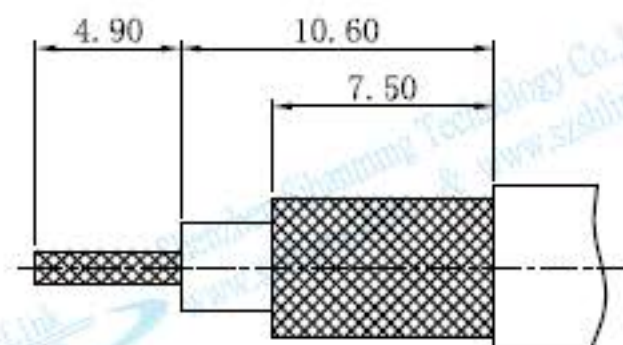
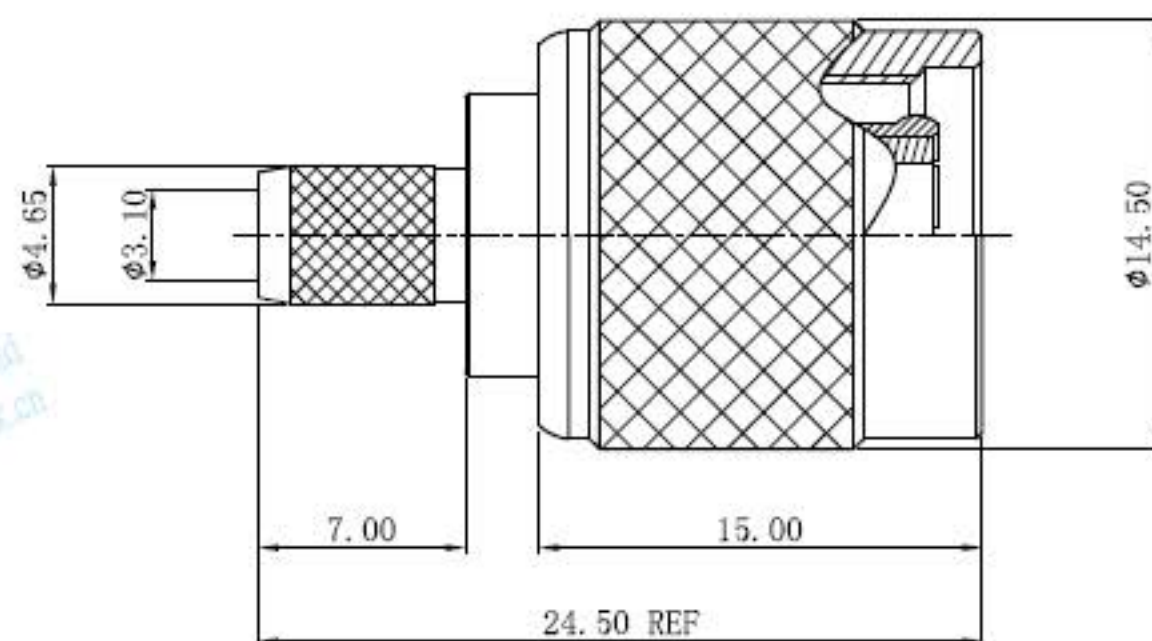
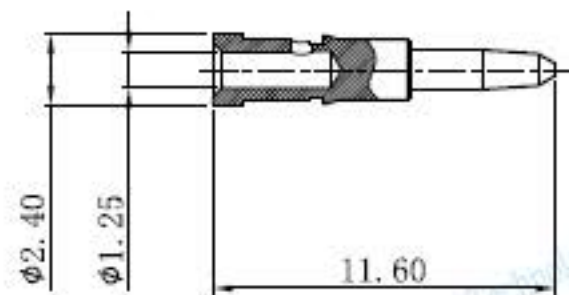

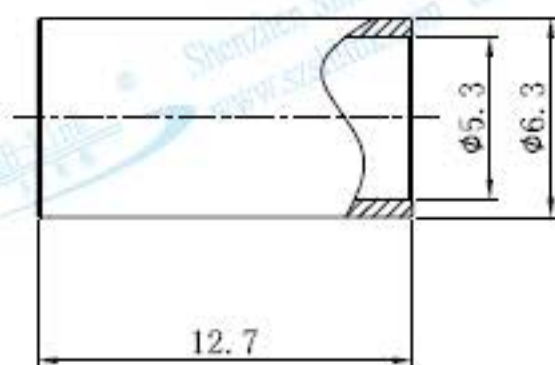


建议剥线尺寸
Recommended wire stripping size



要求: 1. 用于LMR200半柔线缆;

8	Copper pipe 铜管	Brass 黄铜	Nickel Plating镀镍	1	Limits A(±)B(±)C(±)D(±)E(±)F(±) 0-60.030.050.080.100.150.20 6-180.050.080.100.150.200.25 18-300.080.100.150.200.250.35 30-500.100.150.200.250.300.50 50-800.150.200.250.350.500.65 80-1200.200.250.300.500.650.80 120-1800.250.350.500.650.800.95 180-2500.350.500.650.950.951.15	SIGNATURE 作成日期		SH-Link® RF 射频 深圳市思翰铭科技有限公司 Shenzhen Sihanming Technology Co.,Ltd							
7	Insulator 绝缘体	PTFE		1		DRAWN BY	胡宁伟	2017.11.15	SCALE 比例	1:1	WEIGHT 重量(g)		PERSPECTIVE 视角方法		
6	Inner conductor 中心针	Brass 黄铜	Gold Plating镀金	1					CHECKED BY		ITEM NO品号	PART DESCRIPTION品名			
5	Body 主体	Brass 黄铜	Nickel Plating镀镍	1		APPROVED BY			SHM. 110. 006		TNC-C-J3				
4	Spring washer弹簧圈	Brass 黄铜		1											
3	Washer 硅胶圈	Silica gel 硅胶	Red红色	1											
2	Insulator 绝缘体	PTFE		1											
1	Nut 螺母	Brass 黄铜	Nickel Plating镀镍	1											
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量											