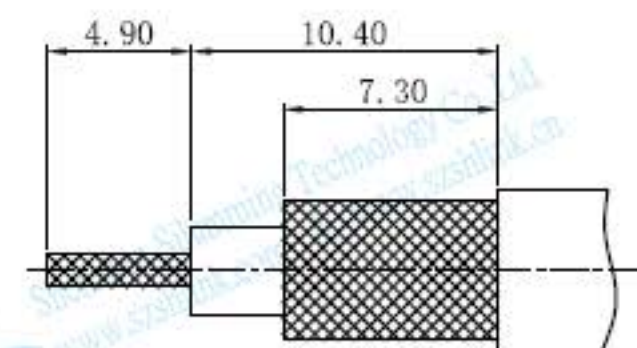
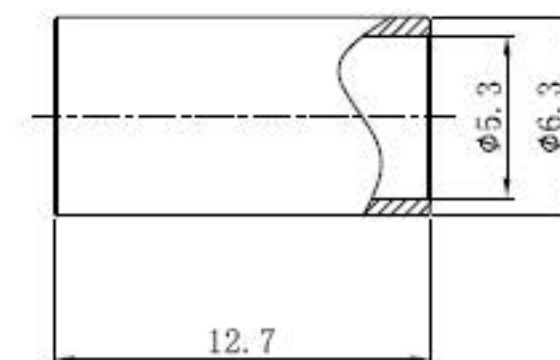

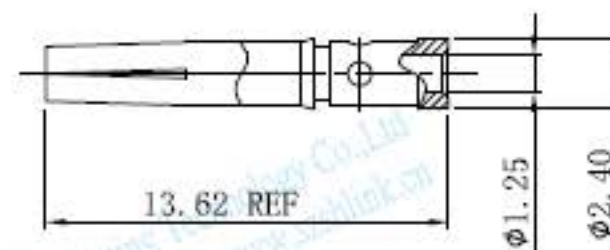
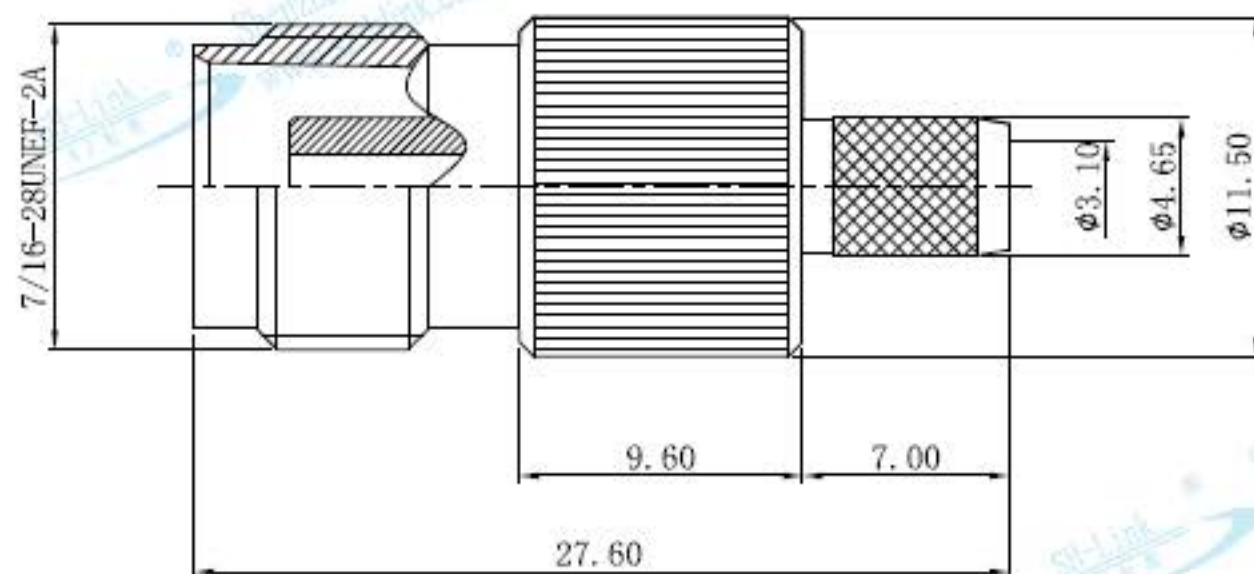


建议剥线尺寸
Recommended wire stripping size

要求: 1. 用于LMR200/RG58线缆;

				Limits	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE	DATE作成日期	SH-Link®	深圳市思翰铭科技有限公司
				0-6	0.03	0.05	0.08	0.10	0.15	0.20			RF 射频	Shenzhen Sihaming Technology Co., Ltd
5	Copper pipe 铜管	Brass 黄铜	Nickel Plating 镀镍	1	6-18	0.05	0.08	0.10	0.15	0.20	DRAWN BY	胡宁伟		
4	Insulator 绝缘体	PTFE		1	18-30	0.08	0.10	0.15	0.20	0.25		2017.11.15	SCALE	WEIGHT
3	Inner conductor 中心针	Phosphor copper 磷铜	Gold Plating 镀金	1	30-50	0.10	0.15	0.20	0.25	0.30	CHECKED BY		比例	重量(g)
2	Insulator 绝缘体	PTFE		1	50-80	0.15	0.20	0.25	0.35	0.50			ITEM NO品号	PART DESCRIPTION品名
1	Body 主体	Brass 黄铜	Nickel Plating 镀镍	1	80-120	0.20	0.25	0.30	0.50	0.65	APPROVED BY		SHM. 110.007	TNC-C-K3
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量	120-180	0.25	0.35	0.50	0.65	0.80				
					180-250	0.35	0.50	0.65	0.95	1.15				