
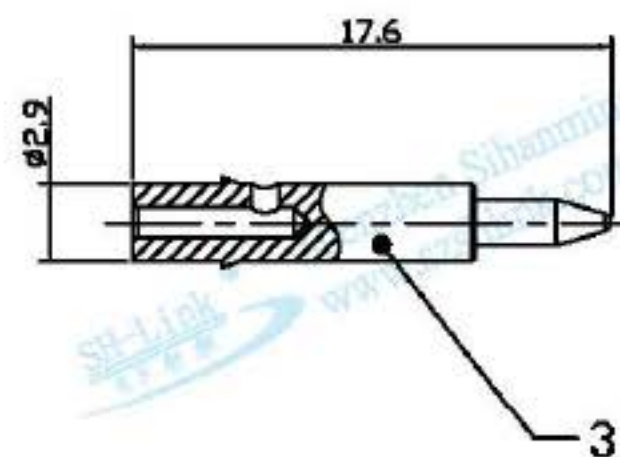
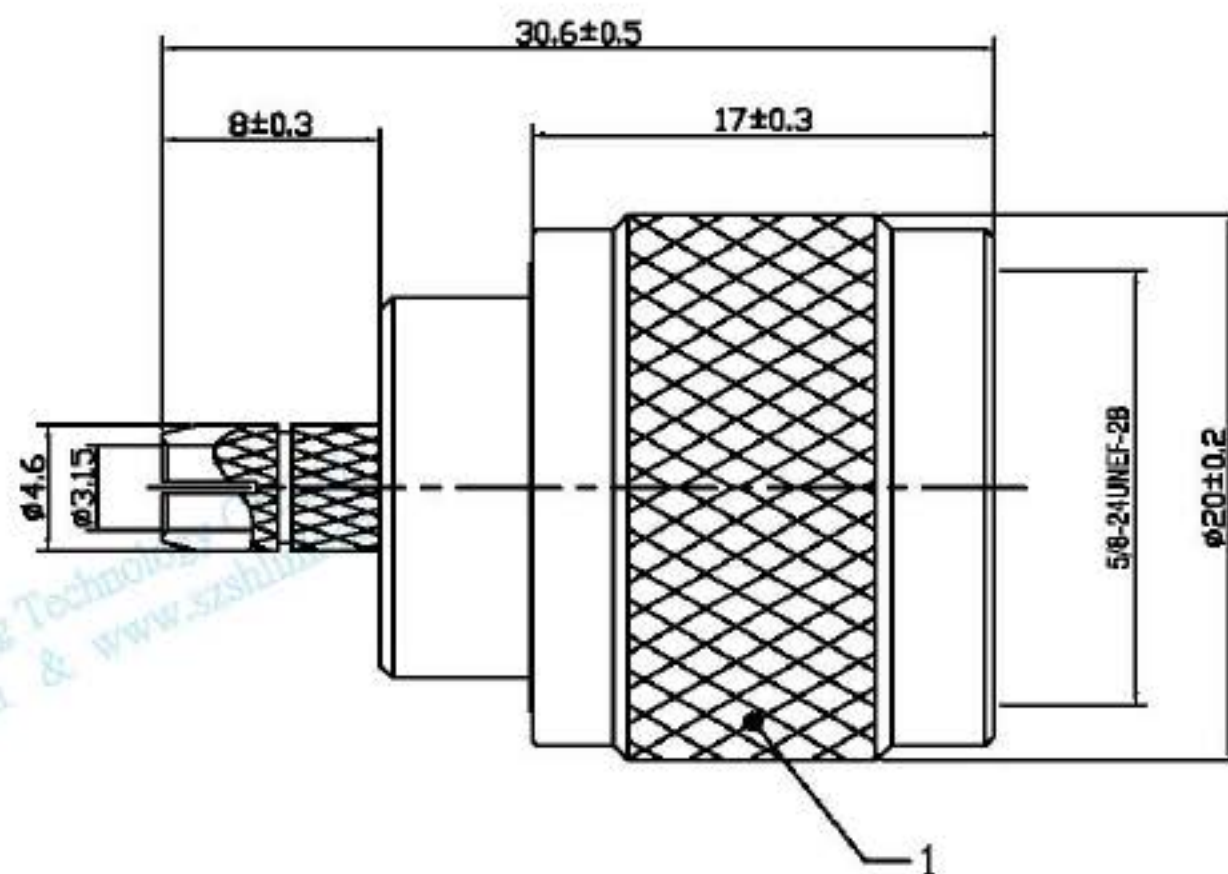


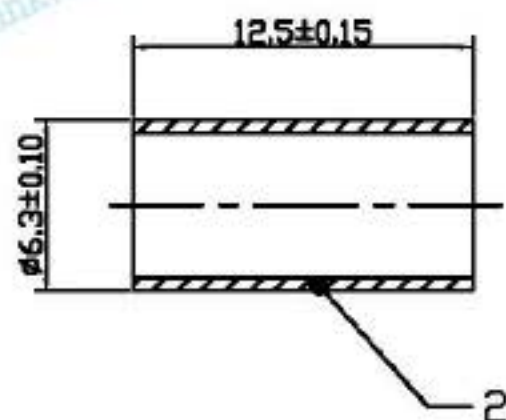

A、电气性能:

- 特性阻抗: 50 Ω
- 频率范围: DC-3GHz
- 工作电压: 1000V
- 接触电阻: 内导体: ≤1mΩ; 外导体 ≤1mΩ
- 绝缘电阻: ≥5000 MΩ
- 介质耐压: 2500V


B、机械特性:

- 机械寿命: 500次 (每分钟12次)
- 连接螺母扭矩: 推荐0.68~1.13N. m

C、包装要求:

- 1PCS/小袋, 50小袋/大袋.

D. 适配线缆: SFF-50-3-1, SYV-50-3, RG-142, RG-58

					Limits	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE DATE作成日期		SH-Link® 深圳市恩翰铭科技有限公司 RF 射频 Shenzhen Sihanning Technology Co.,Ltd					
					0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY	胡宁伟 2017.08.14	SCALE 比例		WEIGHT 重量(g)		PERSPECTIVE 视角方法	
					6-18	0.05	0.08	0.10	0.15	0.20	0.25								
3	Inner conductor中心针	Brass黄铜	Gold plated镀金	1	18-30	0.08	0.10	0.15	0.20	0.25	0.35	CHECKED BY		ITEM NO品号		PART DESCRIPTION品名			
2	copper pipe 铜管	Brass黄铜	Nickel plating镀镍	1	30-50	0.10	0.15	0.20	0.25	0.30	0.50								
1	Insulator绝缘体	PTFE铁氟龙		1	50-80	0.15	0.20	0.25	0.35	0.50	0.65	APPROVED BY		SH3.650.124		N-C-J3 (单针)			
	Body外壳	Brass黄铜	Nickel plating镀镍		80-120	0.20	0.25	0.30	0.50	0.65	0.80								
NO	DESCRIPTION描述	MATERIAL材质	SPECIFICATION规格	QTY数量	120-180	0.25	0.35	0.50	0.65	0.80	0.95								
	1	2	3	4	5					6			7	8		9		10	