
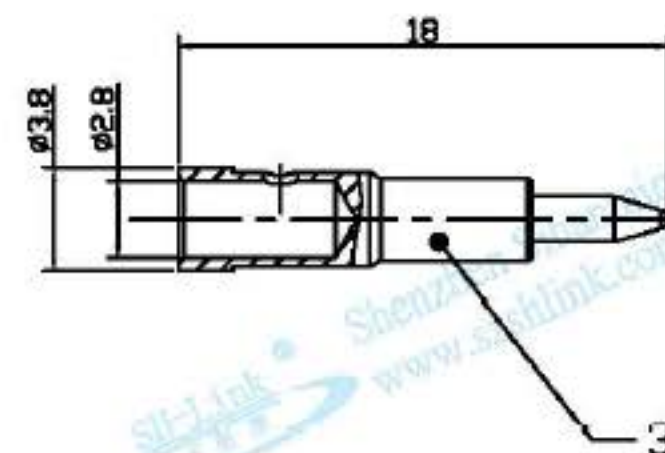


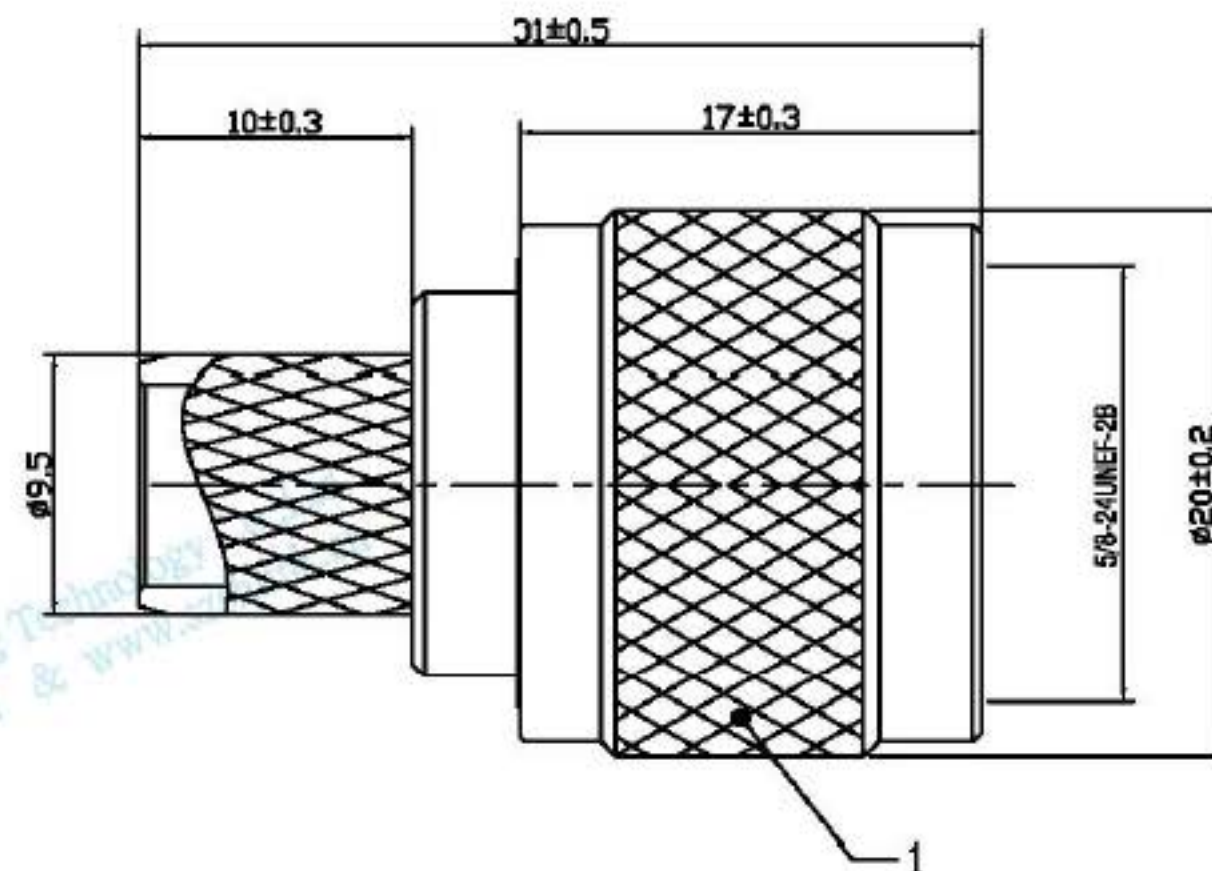

- | | | | | | | | | | | | | | | | | | | |
|--------------------|------------|------------------|-------|---------|------|------|------|------|------|------|----------------------------|--|--|--|------------------|--|--------------------|---|
| | | | | Limits | A(±) | B(±) | C(±) | D(±) | E(±) | F(±) | SIGNATURE DATE作成日期 | | SH-Link® 深圳市思翰铭科技有限公司
R.F. 射频 Shenzhen Sihanming Technology Co.,Ltd | | | | | |
| | | | | 0-6 | 0.03 | 0.05 | 0.08 | 0.10 | 0.15 | 0.20 | DRAWN BY 胡宁伟
2017.02.22 | | SCALE 比例 | | WEIGHT 重量(g) | | PERSPECTIVE 视角方法 |  |
| THIMBLE热缩管 | | black黑色 L=30MM | 1 | 6-18 | 0.05 | 0.08 | 0.10 | 0.15 | 0.20 | 0.25 | | | CHECKED BY | | ITEM NO品号 | | PART DESCRIPTION品名 | |
| Inner conductor中心针 | Brass黄铜 | Gold plated镀金 | 1 | 18-30 | 0.08 | 0.10 | 0.15 | 0.20 | 0.25 | 0.35 | APPROVED BY | | | | SH3. 650. 2128-1 | | N-C-J400 | |
| copper pipe 铜管 | Brass黄铜 | Nickel plating镀镍 | 1 | 30-50 | 0.10 | 0.15 | 0.20 | 0.25 | 0.30 | 0.50 | | | | | | | | |
| Insulator绝缘体 | PTFE铁氟龙 | | 1 | 50-80 | 0.15 | 0.20 | 0.25 | 0.35 | 0.50 | 0.65 | | | | | | | | |
| Body外壳 | Brass黄铜 | Nickel plating镀镍 | | 120-180 | 0.25 | 0.35 | 0.50 | 0.65 | 0.80 | 0.95 | | | | | | | | |
| DESCRIPTION描述 | MATERIAL材质 | SPECIFICATION规格 | QTY数量 | 180-250 | 0.35 | 0.50 | 0.65 | 0.95 | 0.95 | 1.15 | | | | | | | | |