

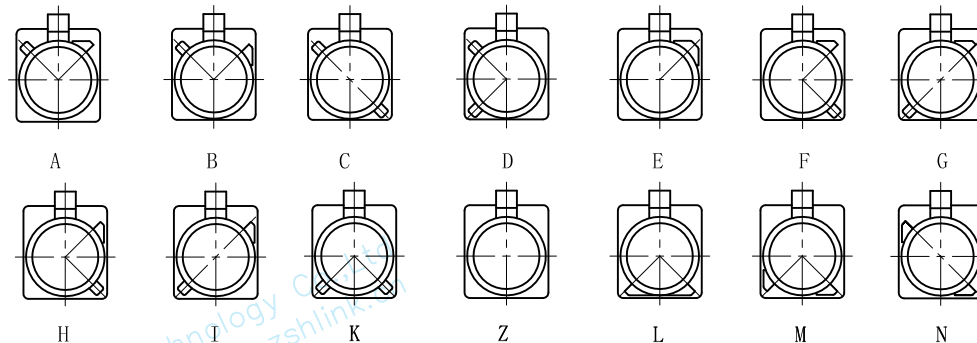




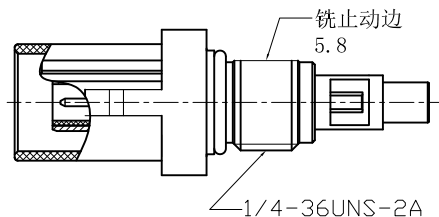






Port Type

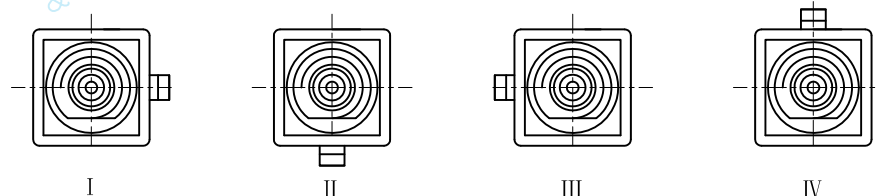

1. Copper: 100pcs/PE bag;
2. Plastic shell 100pcs & above parts/PE bag;
3. Carton: Yellow Corrugated Carton.

1. 配件:各100pcs/PE袋;
2. 塑胶五金壳100pcs+以上配件/PE袋;
3. 外箱:黄色瓦楞纸箱.



						Limits	A(±)	B(±)	C(±)	D(±)	E(±)	F(±)	SIGNATURE		DATE作成日期		SH-Link [®] 深圳市思翰铭科技有限公司 R F 射 频 Shenzhen Sihanming Technology Co.,Ltd						
6	O RING密封圈	BLACK SILICA GEL黑硅胶		1		0-6	0.03	0.05	0.08	0.10	0.15	0.20	DRAWN BY				SCALE	2:1	WEIGHT	PERSPECTIVE			
5	Plastic shell外壳	PA66+30%GF		1		6-18	0.05	0.08	0.10	0.15	0.20	0.25					比例		重量(g)			视角方法	
4	Copper tube铜管	Brass黄铜		Nickel plated镀镍		1	18-30	0.08	0.10	0.15	0.20	0.25	CHECKED BY				ITEM NO品号		PART DESCRIPTION品名				
3	Insulator绝缘体	PTFE聚四氟乙烯		1		30-50	0.10	0.15	0.20	0.25	0.30	0.50											
2	Pin contact中心针	Brass黄铜		Gold plated 镀金		1	50-80	0.15	0.20	0.25	0.35	0.50	APPROVED BY				SHM. 900. 0006-24		FAKRA SMB-C-J1.0-6				
1	Body壳体	Brass黄铜		Three element alloy三元合金		1	80-120	0.20	0.25	0.30	0.50	0.65											0.80
NO	DESCRIPTION描述	MATERIAL材质		SPECIFICATION规格		QTY数量	120-180	0.25	0.35	0.50	0.65	0.80											0.95
							180-250	0.35	0.50	0.65	0.95	0.95	1.15										